

DESCRIPTION

- Manual control of the broadcast of a melody or of a pre-recorded message.
- The control box controls also the messages of beginning and end of pre-recorded SEP* alarms.
- "STOP" function: manual stop of all melodies being played in one or more zones.
- 2 operating modes, "Independent" or "SIGMA", of the control box (programmable via the Sigma software).
- Identification and configuration of the product via the embedded web server.

*SEP: Safety Emergency Procedures.



NORMS

- EN 60950 - EN 55022 - EN 55024.

OPERATING MODES

- **Mode SIGMA**..... Installation equipped with a Sigma master clock.
In mode "SIGMA" the control box allows:
 - Manually start/stop melodies.
 - Activate/de-activate relays.
 - Activate/de-activate programs.
 All the actions initiated from the control box are routed through the Sigma master clock. The commands are recorded in the master clock; there is no perturbation in case of power failure.
- **Mode independent**..... No Sigma master clock in the installation.
In mode "Independent" the control box allows:
 - Manually start/stop melodies.
 When there is no Sigma master clock, the control box sends commands directly to the Harmonys.
- **Control box extension**..... A control box extension can be added to increase the number of manual commands.
- **SEP function**..... In case of manual control, it is possible to send a SEP alarm.

TECHNICAL FEATURES

- **Power supply indicator**..... - Led ON (green) = device powered on:
- Led OFF = no power:
- **Network indicator**..... - Led flashing red quickly = connection to the network in progress:
- Led flashing red slowly = device connected to the network:
- Led OFF = no network:

MECHANICAL FEATURES


- **Construction**..... Shockproof ABS casing (IP41).
- **Operating temperature range**..... 0 to +50 °C.
- **Weight**..... 0.400 kg.
- **Dimensions**..... L 167 X H 88 X D 50 mm.

ELECTRICAL FEATURES

- **Power supply**..... PoE (Power over Ethernet).
- **Consumption**..... 2 W.

REFERENCES

- 907 760..... Control box - 4 buttons
- 907 761..... Control box extension - 4 buttons

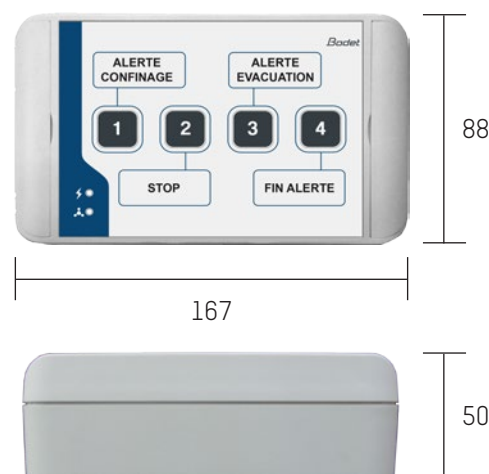

See the product page
>> www.bodel-time.com <<



Dimensions in mm

Réf.: 643L31A 07/15