

# BT6730 Vidéo 12M 12P H15



## Indoor multisport scoreboard for sporting venues and indoor arenas

*Basketball FIBA level 1, international level volleyball, national level handball*



### LED SCOREBOARD MAIN FEATURES


- 12 players per team scoreboard with 15 cm high names and numbers.
- High luminosity SMD LED technology.
- Luminosity adjustment from the main keyboard at any time during the game.
- Teams' names, players' names and players' numbers can be programmed from a PC connected to the main keyboard through a serial port.
- The PC software manages the teams' names, the players' names and numbers and the display luminosity.
- Wired communication via the video control system.
- Integrated horn (120dB at 1 m).

### VIDEO SCREEN MAIN FEATURES

- SMD LED technology (10 mm pitch).
- 16 (960mm x 800mm) video modules.
- Total screen area: 12.3 m<sup>2</sup>.

### CERTIFICATIONS AND STANDARD CONFORMITY

- IR&TTE (radio).
- CE marking.
- Electromagnetic compatibility (CEM).
- Low voltage.

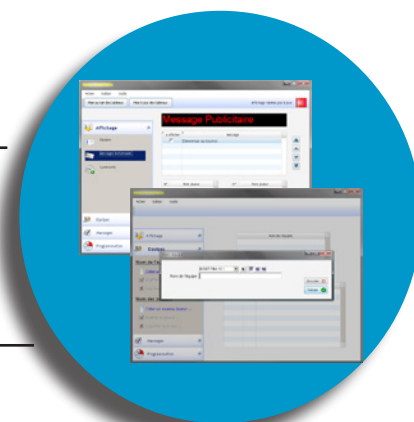

# BT6730 Vidéo 12M 12P H15

## SCOREBOARD DISPLAY

BT6730 Video 12M 12P H15 (The displays of all panels are sport dependent)		Number of Digits	Height of Digits	LED
A	Game clock, Local time and Rest period timer (or Time-out timer for volley)	4	30 cm	
	Period number or Current set number	1	25 cm	
	Number of team fouls or Number of won sets	1 per team	25 cm	
	Time-out indicators	3 dots per team	Ø36 mm	
	Game clock stopped indicator	1 dot	Ø66 mm	
B	Teams' names	Max. 10 characters / team	20 cm	
	Score (0 to 999)	3 per team	30 cm	
C	Last individual foul (Player's nber + nber of fouls) and Time-out timer or 1 Penalty timer per team.	4 per team	20 cm	
D	Players' numbers (0 to 99 - 12 players per team)	2 per player	15 cm	
	Players' names	Max. 12 characters per name	15 cm	
E	Individual fouls indicators ( <b>Basketball only</b> )	4 dots per player	Ø36 mm	
		Fifth foul: 1 dot per player	Ø36 mm	
	Points per player (12 players per team) ( <b>Basketball only</b> )	2 per player	15 cm	

## TECHNICAL CHARACTERISTICS

	Dimensions L x H x D (mm)	Weight	Construction	Protection Index	Optimal viewing distance	Viewing angle
BT6730 Video 12P H15	8388 x 4015 x 80	1050 kg	Shockproof steel casing	IP20 IK09	150 m	160°
F 12 m² Video Screen	3840 x 3200 X 107					

	Power supply	Power consumption	Electrical protection
BT6730 Video 12P H15	230VAC ±10%, 50/60Hz	3827W	18 A Circuit breaker - D curve
12 m² Video Screen		7200W	33A Circuit breaker - D curve

Main keyboard ⇨ BT6730 Alpha scoreboard communication	Wired
---	-------

## REFERENCES

- BT6730 Alpha 12P H15 scoreboard: ... 915926 (including software).
- Main keyboard: ..... 915809.
- Secondary keyboard: ..... 915805.
- 12 m² Video screen:..... consult BODET

