



# STEELWORX® 304 STAINLESS STEEL









Steelworx levers are supplied with bolt through fixings and should be used in conjunction with BTL's on P437 and Eurospec locks. For matching escutcheons SSE/SSP/SSU1405 see P76. For matching bathroom turn SST1415 see P76.



# STEELWORX® 304 STAINLESS STEEL



## SSL1404

#### **SHAPED LEVER ON SPRUNG ROSE**

Concealed Fix

Square Press-on-Rose

#### Dimensions (mm):

Rose: 52x52
Rose Thickness: 8
Projection: 72
Lever Length: 133



SSS



### SSL1405

#### **SQUARE LEVER ON SPRUNG ROSE**

Concealed Fix

Square Press-on-Rose

## Dimensions (mm):

Rose: 52x52
Rose Thickness: 8
Projection: 64
Lever Length: 135
Bar: 16x16



BSS/SSS



## SSL1406

# SQUARE MITRED LEVER ON SPRUNG ROSE

Concealed Fix

Square Press-on-Rose

#### Dimensions (mm):

Rose: 52x52
Rose Thickness: 8
Projection: 70
Lever Length: 129
Bar: 22 Dia.




BSS/SSS

Steelworx levers are supplied with bolt through fixings and should be used in conjunction with BTL's on P437 and Eurospec locks. For matching escutcheons SSE/SSP/SSU1405 see P76. For matching bathroom turn SST1415 see P76.





# STEELWORX® 304 STAINLESS STEEL

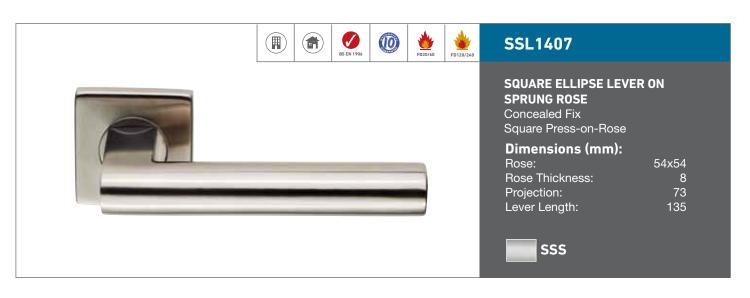







Steelworx levers are supplied with bolt through fixings and should be used in conjunction with BTL's on P437 and Eurospec locks.