

STEELWORX® 304 STAINLESS STEEL



SWL1006DUO

Solid Lever on Round Rose Concealed Fix 2 Part Screw-on-Rose

Dimensions (mm):

52 Dia. Rose Thickness: Lever Length: 135 19 Dia.

BSS/SSS



SWL1008DU0

VALIANT


Solid Lever on Round Rose Concealed Fix 2 Part Screw-on-Rose

Dimensions (mm):

52 Dia. Rose: Rose Thickness: Projection: 54 Lever Length: 134 19 Dia. Bar:



BSS/SSS

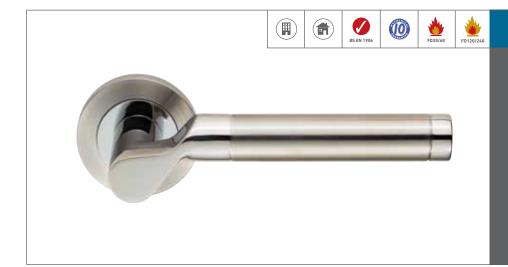

SWL1009DU0

LUCERNA

Solid Lever on Round Rose Concealed Fix 2 Part Screw-on-Rose

Dimensions (mm):

Rose: 52 Dia. Rose Thickness: Projection: 60 Lever Length: 133 19 Dia.



BSS/SSS



Steelworx levers are supplied with bolt through fixings and should be used in conjunction with BTL's on P437 and Eurospec locks. For matching escutcheons SWL102/103 see P87. For matching bathroom turns SWT1016/1016i and SWT1025i see P87.