



One BIN only
for a CCT range



Lifetime



Certified




Certified



Warranty



Certified

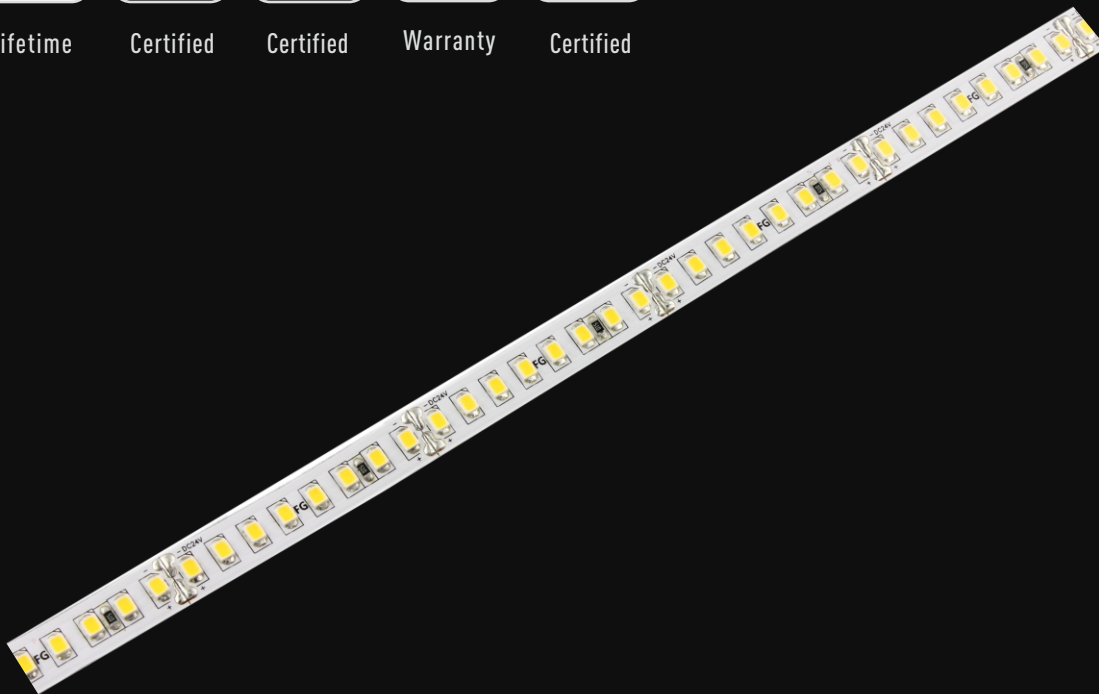

Ra Available

IP Grade Available





Features

- 130LM/W Light Efficacy
- Constant Voltage 24 VDC system
- Silicone extruded-IP68, Silicone tube encased-IP67, Silicone coated-IP65, indoor-IP22 available
- Epistar chips, LM80 tested
- Ra90+/80+
- CE and RoHS certified
- 5 years warranty

Specifications

LED Type	SMD 2835	Dimmable	Yes (compatible with BV311 RF dimmer & BV Dimmer)
LED Q'ty/m	128pcs	IP grade	IP22 (IP65 & IP67 & IP68 available upon request)
Input Voltage	24V DC Constant Voltage	Installation	Heat-conductive adhesive tape (Heat sink is necessary)
Power	11.52W/m	Working Temperature	-40~+80 °C
Cutting length	50mm, 8 LEDs	Max run	5 meters (Single Feed)
Strip Width	10mm	Certification	CE, RoHS
Viewing Angle	120°	Warranty	5 years

Order Code	CCT/ Color	Ra	Lumen/M ²
FN-H2835-128-24-27K	 2645-2805K	90+, 80+	1300
FN-H2835-128-24-29K	 2855-3025K	90+, 80+	1300
FN-H2835-128-24-34K	 3265-3535K	90+, 80+	1300
FN-H2835-128-24-42K	 3897-4223K	90+, 80+	1680
FN-H2835-128-24-51K	 4900-5300K	90+, 80+	1680
FN-H2835-128-24-57K	 5477-6020K	90+, 80+	1680
FN-H2835-128-24-63K	 6020-6530K	90+, 80+	1680
FN-H2835-128-24-65K	 6175-6825K	90+, 80+	1680

Note[®]: Contact Blueview for exact warranty period and policy

Note[®]: Lumen output are measured according to PMS-80, with a tolerance of +/- 5%


Note[®]: Standard package: 5m/roll

Order Code


Model	Quality level	LED Q'ty/M	Input voltage	CCT/Color
FN	H2835	128	24	27K
FN-IP22 FWS-IP65 FWT-IP67 FWE-IP68	H2835-5 yrs warranty		24V DC	view table above for options

Dimension //

Unit:mm[in]

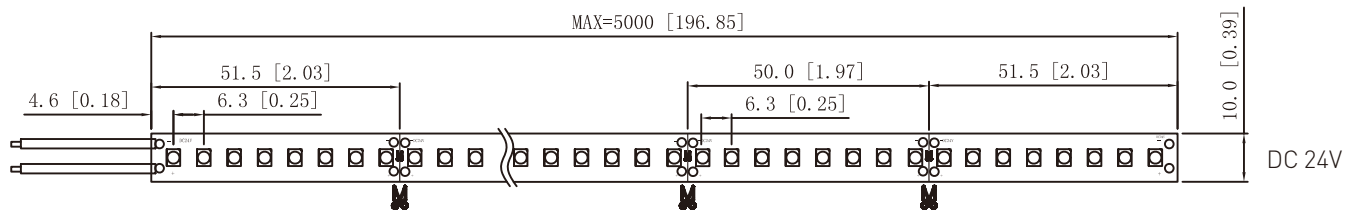

Package //

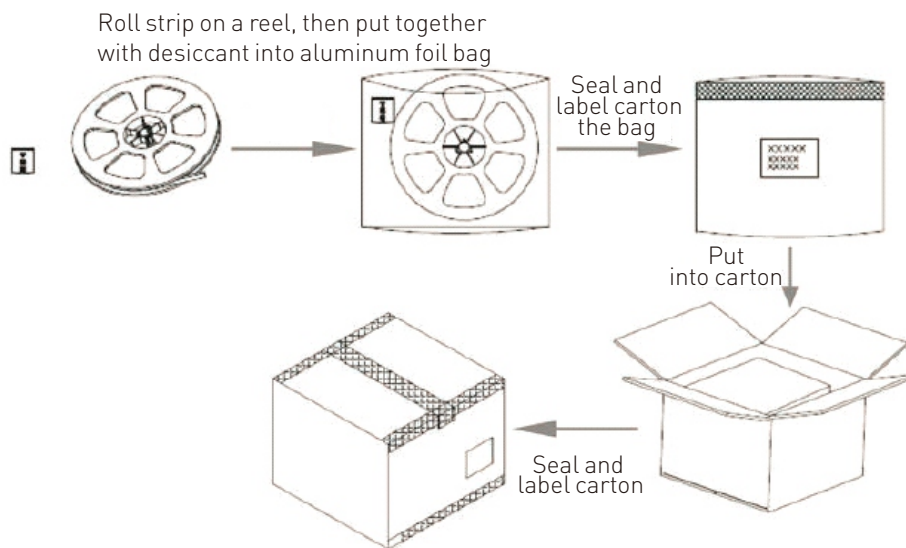

Packing Info

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
FN-H2835-128-24	8.13 (1±10%) kgs	13.13 (1±10%) kgs	100 rolls	550*400*340mm
FWS-H2835-128-24	21.43 (1±10%) kgs	22.43 (1±10%) kgs	80 rolls	550*400*340mm
FWTU-H2835-128-24	17.97 (1±10%) kgs	18.97 (1±10%) kgs	60 rolls	550*400*340mm
FWE-H2835-128-24	14.01 (1±10%) kgs	15.01 (1±10%) kgs	30 rolls	550*400*340mm