

Finish

- integrated into the system POLYLAM®



IP20



350mA CC



Efficiency luminaire - 90lm/W



DALI





Driver inside



2x30°



Optional: Wieland plug-in system
GST 18i5

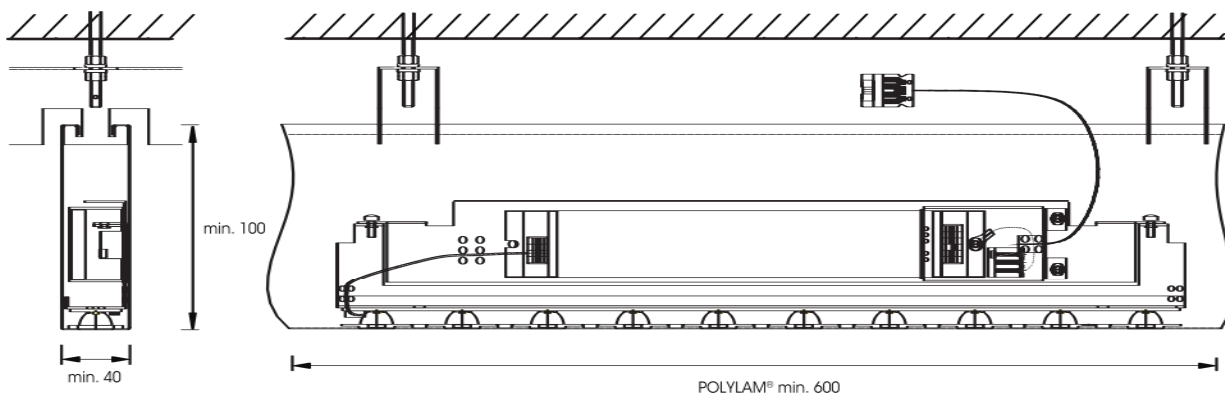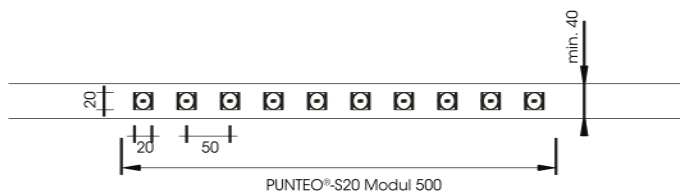

CRI > 80

Not dimmable: on request

LED

10x1 W, 3000K, 810lm

10x1 W, 4000K, 1060lm

Driver

230 V / 50Hz

N°: LVG 350-035-02-01

LED LUMINAIRE

2x30° · 10x1 W · 3000K N°: PUN S20-010 W3-021

2x30° · 10x1 W · 4000K N°: PUN S20-010 W4-021