
İTFAİYE BAĞLANTI AĞZI
TWO WAY INLET



Genel Özellikler/*Specifications*

Model/*Type*	:	Y-3006
Ölçü/*Dimensions*	:	4" x 2 ½" x 2 ½"
Anma Basıncı/*Nominal Pressure*	:	300 psi (20,6 bar)
Çalışma Sıcaklığı/*Working Temperature*	:	+4˚C/+80˚C
Akış hassasiyeti/*Flow Sensitivity*	:	500 GPM
Standartlar/*Standards*		
Sertifikalar/*Certificate*	:	UL, FM

Bina dışına montajı yapılır, sprinkler ve yangın dolap hatlarının itfaiye tarafından beslenmesini sağlamak için dizayn edilmiştir. Aynı hat üzerinde çek valf ile birlikte kullanılmalıdır. Donma riski olduğundan bulunduğu hat üzerinde otomatik damlatma vanası kullanılmalıdır. Yangın dolap hattı ve sprinkler tesisatı olan tüm yangın tesisatlarında kullanılır./*Mounted outside the building it is used to pump water by the fire department into the existing sprinkler and fire cabinets. For the same installation it should be used in combination with the check valve. When there is a risk of freezing, a bleeder valve should be mounted on the same installation. It can be used for all fire protection lines where there is a fire cabinet and a sprinkler system.*

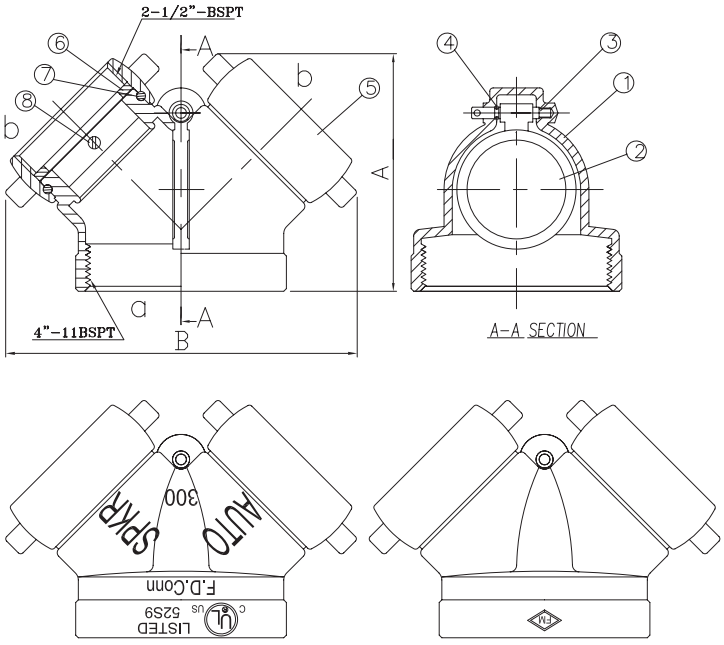

Ölçüler/*Dimensions*

	4" x 2 ½"
A	5-33/64"
B	8-5/64"

Malzeme Özellikleri/*Material Specifications*

No	Parça Adı/*Part Name*	Malzeme/*Material*
1	Gövde+Kapak/*Body+Bonnet*	Pirinç/*Brass*
2	Klape/*Clapper*	Pirinç/*Brass*
3	O-Ring/*O-Ring*	Vulkanize Kauçuk/*Vulcanized Rubber*