İTFAİYE KAT BAĞLANTI VANASI
LANDING VALVE




Genel Özellikler/*Specifications:*


Model/*Type*	:	Y-3009
Ölçü/*Dimensions*	:	2 ½"
Anma Basıncı/*Nominal Pressure*	:	300 psi (20,6 bar)
Çalışma Sıcaklığı/*Working Temperature*	:	+4˚C/+80˚C
Akış hassasiyeti/*Flow Sensitivity*	:	500 GPM

Standartlar/*Standards:*

Sertifikalar/*Certificate*	:	UL, FM

İtfaiyenin su almak maksadıyla katlarda yangın dolapları yanında, yakınında veya yangın kaçış koridorlarında kullanılır. Yüksek katlı binalarda en az her iki katta bir kullanılması zorunludur./*In order to supply the fire department with water it is mounted in floors next to fire cabinets, nearby or near the fire escape corridor. In high-rise buildings it is mandatory to have one in every two floors.*

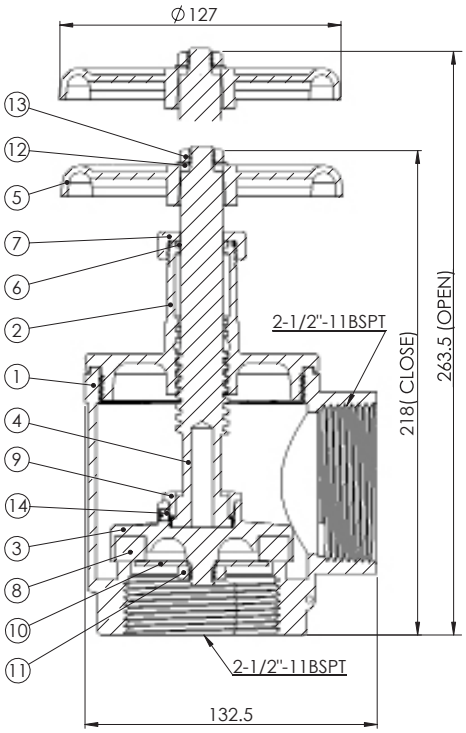



Ölçüler/*Dimensions*

	2 ½" x 2 ½"
A	3,99
B	5,90
C	3,34
D	2,75
E	7,67

Malzeme Özellikleri/*Material Specifications*

No	Parça Adı/*Part Name*	Malzeme/*Material*
1	Gövde+Kapak/Body+Bonnet	Pirinç/Brass
2	Klape/Clapper	Pirinç/Brass
3	O-Ring/O-Ring	Vulkanize Kauçuk/Vulcanized Rubber