
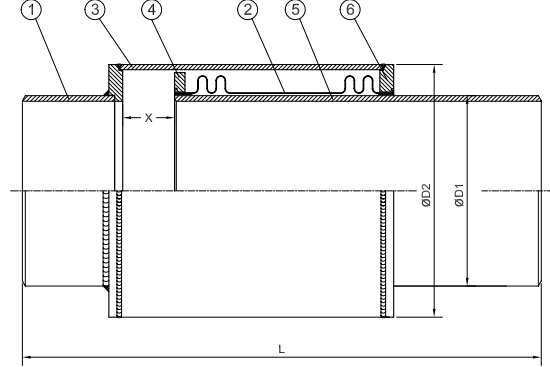


T-1990 / T-1995 / T-1996

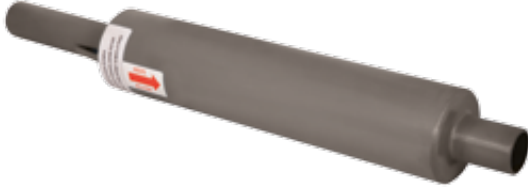

Genel Özellikler / General Specifications

Çalışma Sıcaklık Aralığı / Working Temperature : -80 ... +420°C (16 Bar)

Genleşme Miktarı / Expansion - Compression

DN 25 - 250	T-1990 Movement 30mm (- 20 ... +10 mm)
	T-1995 Movement 60mm (- 40 ... +20 mm)
	T-1996 Movement 90mm (- 60 ... +30 mm)

Standartlar / Standards

Sertifikalar / Certificates : 

Tasarım / Design : TS 10880

Bağlantı Boyutları / Connection Dimensions : TS EN 1092-1 (PN 16)

Testler / Tests : TS EN 12266-1

Uygulamalar / Applications

Sıcak ve soğuk su sistemleri, basınçlı hava, kızgın su, buhar, kızgın buhar, kızgın yağ sistemleri
 Hot and cold water systems, compressed air, superheated water, steam, superheated steam systems, superheated oil systems

No	Parça Adı / Part Name	Malzeme / Material
1	Kaynak Boynu / Welded Neck	St37 - Çelik / Steel
2	Körük / Bellow	X5CrNi18 10 - AISI304 - Paslanmaz Çelik / Stainless Steel
3	Dış Boru / Outer Pipe	St33 - Çelik / Steel (DIN 2440B, TS 301/3)
4	İç Flanş / Inner Flange	St37 - Çelik / Steel
5	Kayar Boru / Sliding Pipe	St33 - Çelik / Steel (DIN 2440B, TS 301/3)
6	Dış Flanş / Outer Flange	St37 - Çelik / Steel

Ölçüler / Dimensions	Anma Basıncı / Nominal Pressure	16 Bar												
	Anma Çapı / Nominal Diameter	DN	25	32	40	50	65	80	100	125	150	200	250	300
	T-1990	L 30mm (- 20 / +10mm)	250				255		260		310	320	345	350
	T-1995	L 60mm (- 40 / +20mm)	410				335	350	360		420		440	450
	T-1996	L 90mm (- 60 / +30mm)	570				500		510		580	610	615	630
	T-1990	Eksenel Hareket / Axial Movement	30mm (- 20 / +10mm)											
	T-1995		60mm (- 40 / +20mm)											
	T-1996		90mm (- 60 / +30mm)											
	T-1990		25											
	T-1995		45											
	T-1996		65											
	Vana Boyutları / Valve Dimensions (mm)	ØD1	38	42,4	48,3	60,3	76,1	88,9	114,3	139,7	165,1	219,1	273,1	323,9
		ØD2	76,1	76,1	88,9	114,3	139,7	165,1	219,1	219,1	323,9	355,6	406,4	