


METAL KÖRÜKLÜ KOMPANSATÖR (DIŞTAN BASINÇLI, FLANŞLI, PN 16)

-METAL BELLOWS EXPANSION JOINTS (EXTERNAL PRESSURED, FLANGED, PN 16)



T-1970 / T-1980 / T-1985

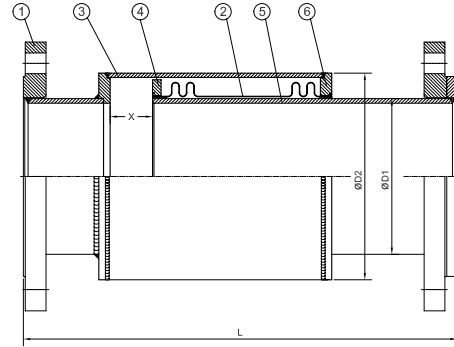

Genel Özellikler / General Specifications

Çalışma Sıcaklık Aralığı / Working Temperature : -80 ... +420°C (16 Bar)

Genleşme Miktarı

DN 25 - 250	T-1970 Movement 30mm (- 20 ... +10 mm)
	T-1980 Movement 60mm (- 40 ... +20 mm)
	T-1985 Movement 90mm (- 60 ... +30 mm)

Standartlar / Standards

Sertifikalar / Certificates :   

Tasarım / Design : TS 10880

Bağlantı Boyutları / Connection Dimensions : TS EN 1092-1 (PN 16)

Testler / Tests : TS EN 12266-1

Uygulamalar / Applications

Sıcak ve soğuk su sistemleri, basınçlı hava, kızgın su, buhar, kızgın buhar, kızgın yağ sistemleri
Hot and cold water systems, compressed air, superheated water, steam, superheated steam systems, superheated oil systems

No	Parça Adı / Part Name	Malzeme / Material
1	Flanş / Flange	St37 - Çelik / Steel
2	Körük / Bellow	X5CrNi18 10 - AISI304 - Paslanmaz Çelik / Stainless Steel
3	Dış Boru / Outer Pipe	St33 - Çelik / Steel (DIN 2440B, TS 301/3)
4	İç Flanş / Inner Flange	St37 - Çelik / Steel
5	Kayar Boru / Sliding Pipe	St33 - Çelik / Steel (DIN 2440B, TS 301/3)
6	Dış Flanş / Outer Flange	St37 - Çelik / Steel

Ölçüler / Dimensions	Anma Basıncı / Nominal Pressure	16 Bar												
	Anma Çapı / Nominal Diameter	DN	25	32	40	50	65	80	100	125	150	200	250	300
	T-1970	L 30mm (- 20 / +10mm)	285			290			300		350	360	390	410
	T-1980	L 60mm (- 40 / +20mm)	440			370		385	400		460	480	490	510
	T-1985	L 90mm (- 70 / +20mm)	600			530			540	550	620	650	660	690
	T-1970	"EKSENEL HAREKET Axial Movement"	30mm (- 20 / +10mm)											
	T-1980		60mm (- 40 / +20mm)											
	T-1985		90mm (- 60 / +30mm)											
	T-1970	X	25											
	T-1980		45											
	T-1985		65											
Vana Boyutları / Valve Dimensions (mm)	ØD1		42,4	48,3	60,3	76,1	88,9	114,3	139,7	165,1	219,1	273,1		
	ØD2		76,1	88,9		114,3	139,7	165,1	219,1	219,1	323,9	355,6	406,4	