



legg-BYT124T9

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors.

**Diffuser** - Tempered glass diffuser.

**Reflector** - Anodized aluminium reflector.

**Standards** - Manufactured in accordance with IEC 60598.

**LED** - Reducing energy consumption, 50,000 Hrs Life span under temp(-20°C To 50°C).

**Objective**

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Completely dustproof. Protected against splash of water.



**Obiettivo**

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.



CODE	POWER	IP	BEAM ANGLE	LUMENS	DIMENSION
------	-------	----	------------	--------	-----------

legg-BYT124T9	9W	54	10°/24°	110 lm/W	135 x 80mm Φ120mm
legg-BYT124T12	12W	54	10°/24°	110 lm/W	135 x 80mm Φ120mm
legg-BYT205T15	15W	54	10°/24°	110 lm/W	170 x 80mm Φ155mm
legg-BYT205T20	20W	54	10°/24°	110 lm/W	170 x 80mm Φ155mm
legg-BYT306T30	30W	54	10°/24°	110 lm/W	190 x 80mm Φ175mm
legg-BYT508T45	45W	54	10°/60°	110 lm/W	230 x 80mm Φ210mm

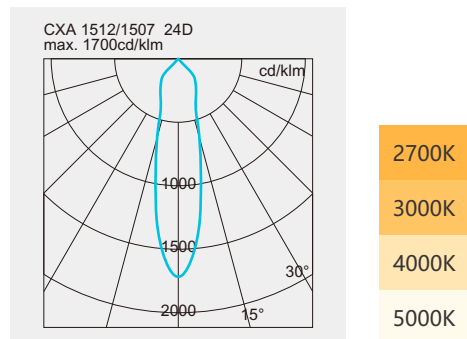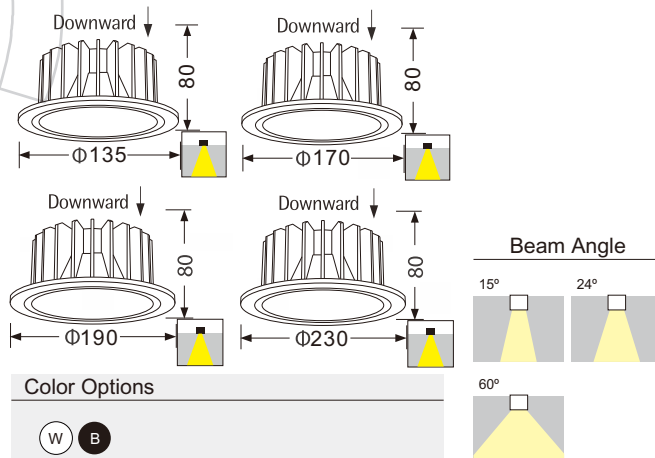

CRI >90

-20° C  
55° C

85~265V  
50/60Hz

