
XRN-410S

4CH 8M H.265 NVR with PoE Switch



Key Features

- Up to 4CH, 8megapixel camera supported
- H.265, H.264, MJPEG codec support,
- WiseStream support
- 50Mbps network camera recording
- Plug & play by 4 PoE/PoE+ ports
- Max. 1HDD supported
- HDMI / VGA local monitor
- ARB supported
- P2P service(QR code connect) support

08-2019 ©2020 Hanwha Techwin Co., Ltd. All rights reserved.

Display		
Network camera	Inputs	Max. 4CH
	Resolution	8MP ~ CIF
	Protocols	Wisenet, ONVIF
Decoding	Local Display	[Clone Display] HDMI: 3840 x 2160, 1920x1080, 1280x720 VGA: 1920x1080, 1280x720
	Resolution	8MP(60fps), 5MP(90fps), 3MP(120fps), 2MP(240fps), 720p(240fps), D1(240fps)
Performance		
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 50Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Schedule(Continuous/Event), Event (Pre/Post)
	Event Trigger	Alarm Input, Video Loss, Camera Event(Alarm, MD, Video Analytics, Defocus)
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max. 32Mbps(4CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 4CH(Local Monitor, Network)
	Fisheye Dewarping	WEB / CMS
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max. 6TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Upto 4CH) Play, Date-Time/Title display
Network		
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Wisenet DDNS
Transmission Bandwidth		Max. 64Mbps
Audio	Input/Output	4 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption
Web viewer	Supported OS	Windows 7, 8, 10, Mac OS X 10.9. 10.10. 10.11
	Supported browser	Plug-in free web viewer - Supported Browser: Google Chrome 47, MS Edge 20 Plug-in Webviewer - Supported MS Explore 11, Apple Safari 9 * Mac OS X only
Viewer Software		SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS

 ©2020 Hanwha Techwin Co., Ltd. All rights reserved.

Hanwha Techwin


Functions		
Camera Setup	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer, SPC-2000
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(Multi-Profile Support), Playback
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration		P2P(QR code)
Interface		
HDMI		1EA
VGA		1EA
e-SATA		1EA
Audio		Out(1EA, RCA, Line)
Ethernet		RJ-45(10/100/1000BASE-T) x 1 RJ-45(PoE+) x 4
Alarm		In 4EA, Out 2EA
USB		2EA(Front 1, Rear 1)
System		
System Control		Mouse, IR remocon, Web, Controller (SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
Operating Temperature		0°C to +40°C(32°F to 104°F)
Operating Humidity		20% ~ 85% RH
Electrical		
Power Input		54V DC / 1.67A
Power Consumption		MAX. 13W (44BTU, 2TB HDD x 1ea)
PoE Budget		Max. 50W
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		W300 x H47 x D208.7mm (11.81"X1.85"X8.22") (1U)
Weight		1.694Kg

- The lastest product information / specification can be found at hanwha-security.com
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin , formerly known as Samsung Techwin.

FC | c UL us | CE | EAC 08-2019 ©2020 Hanwha Techwin Co., Ltd. All rights reserved.

Hanwha Techwin

Unit: mm(inch)

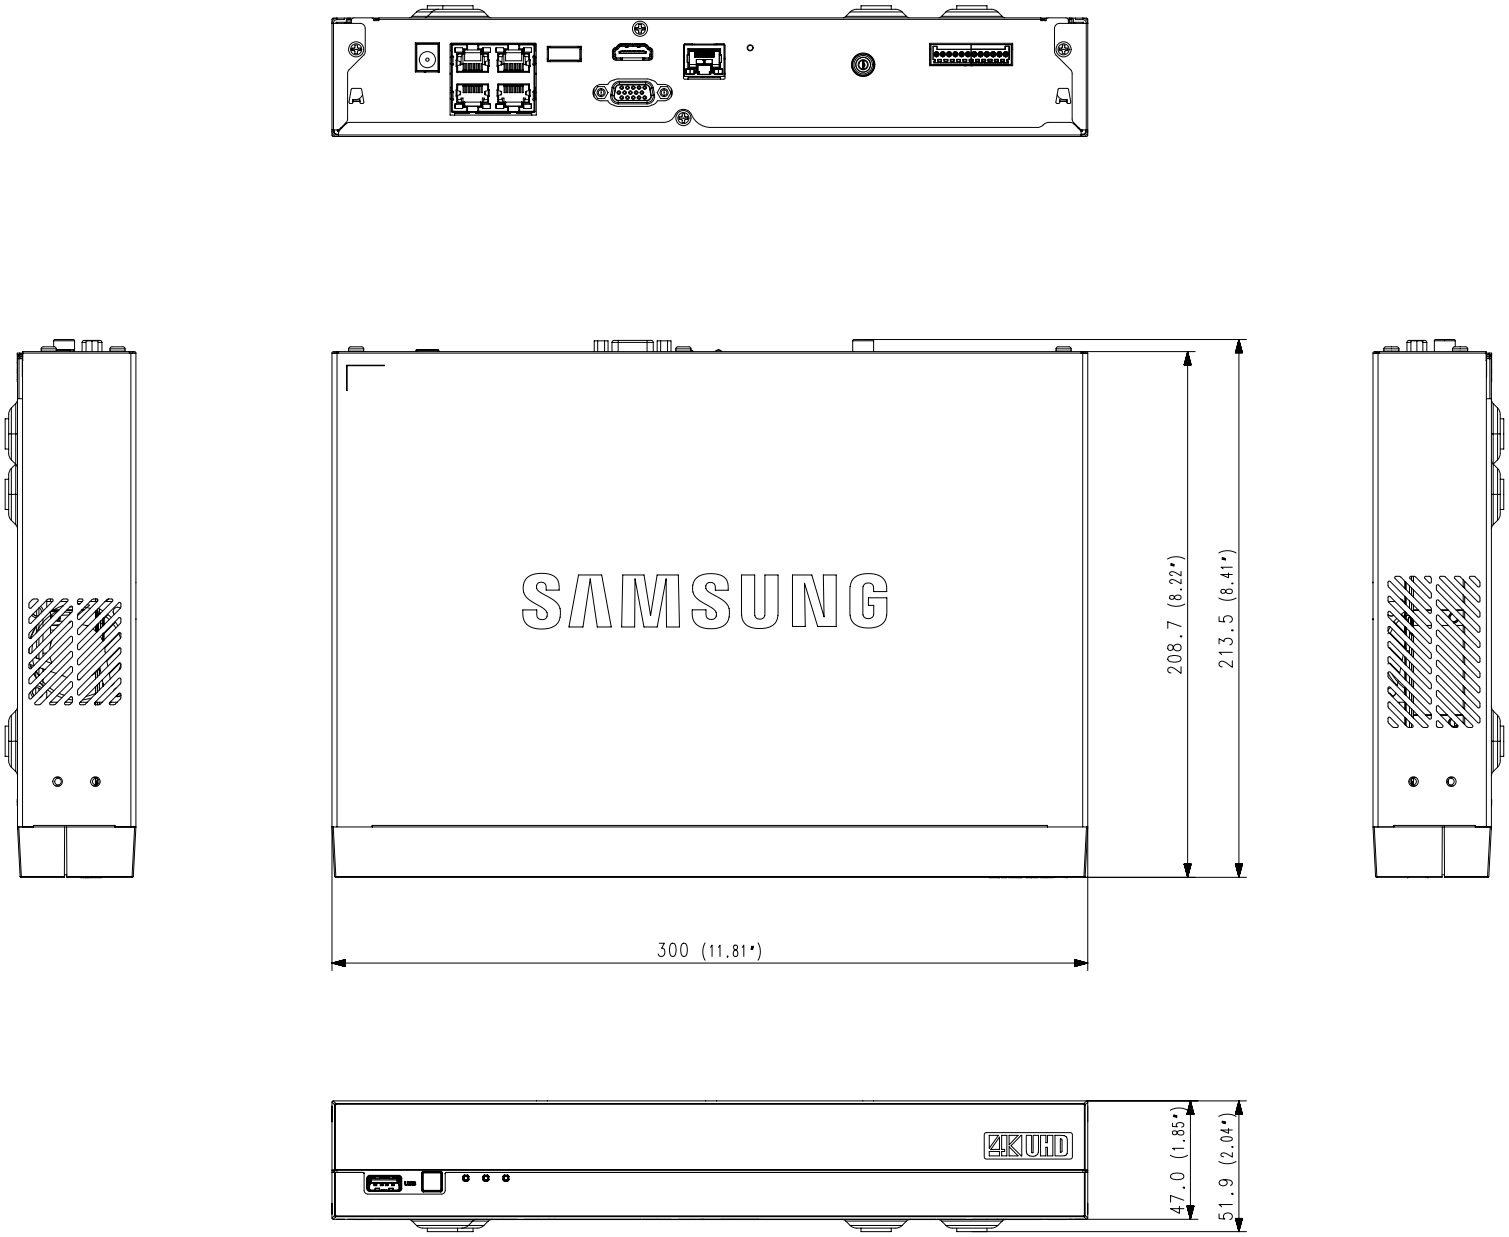

XRN-410S
Appearance Drawing

Hanwha Techwin
08-2019 © 2020 Hanwha Techwin Co., Ltd. All rights reserved.