142HU FGK Bibtap with integral double check valve


water



specification

- DZR metal
- hose union
- ferrule key supplied
- DZR body

Connection	Code	Total (kg)
½"	508117	0.56

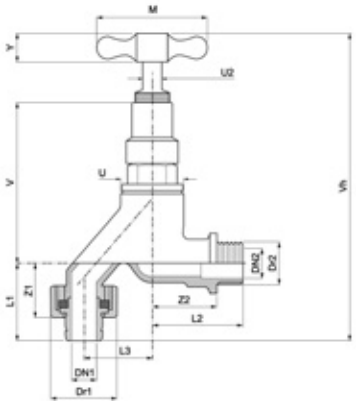

Dimensions (mm)

	DN1/DN2	Dr1	Dr2	L1	L2	L3	M	U	U2	V	Vh	Y	Z1	Z2
½"	DN15	30.0	21.0	70.0	44.0	36.0	62.0	30.0	11.0	82.0	188.0	17.0	36.0	31.0

Material specification

Nr	Component	Material
1	Body	DZR
2	Backnut	Forged brass
3	Anti-rotational washer	Polyethelene
4	Head	Brass bar
5	Spindle	Brass bar
6	Handle	Forged brass
7	Valve	Brass bar
8	Gland	Brass bar
9	Packing	Plastic
10	Seals	Rubber

Maximum pressure conditions

Size	Max Pressure (bar)	Min/Max Temperature (°C)	Test Pressure Shell (bar)	Test Pressure Seat (bar)	Max Pressure (psi)	Min/Max Temperature (°F)	Test Pressure Shell (psi)	Test Pressure Seat (psi)
½"	10.0	4° + 90°C	15.0	11.0	145.0	39° + 194°F	217.5	159.5

