ARI

TITANIUM PLUS



COMFORT
- Temperature regulation

EFFICIENCY&ENERGY SAVING
- Ecological polyurethane insulation


QUALITY
- Titanium glasslined inner tank tested at 12 bar
- Oversize magnesium anode
- 5-bolts flange
- Pressure safety valve rated at 6 bar

DESIGN
- Exclusive Italian design
- Wall-hung

علامة الجودة الإماراتية
Emirates Quality Mark

CE

easy and safe

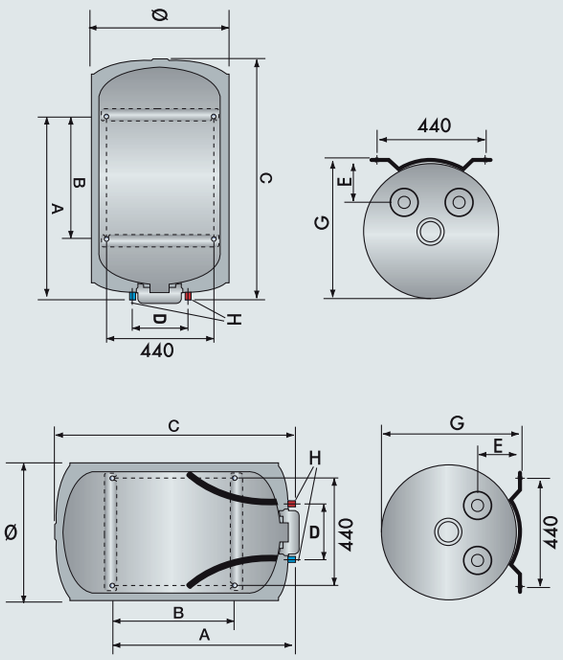

LEGEND
E Cold water inlet G 3/4”
U Hot water outlet G 3/4”

TECHNICAL DATA		ARI 150 V THER	ARI 150 H THER	ARI 200 V THER	ARI 200 H THER
Capacity	l	150	150	200	200
Power	kW	1,8	2	2,2	2
Voltage	V	230	230	230	230
Heating time (deltaT= 50°C)	h,min	5,10	4,40	5,35	5,50
Heat dispersion	kWh/24h	1,41	1,68	1,85	2,06
Max working temp.	°C	65	75	65	75
Protection	IP	IP25D	IP25	IP25D	IP25
Weight	kg	37	39	45	47
OVERALL DIMENSIONS					
a	mm	750	750	1050	1050
b	mm	500	500	800	800
c	mm	1010	1020	1270	1285
d	mm	230	230	230	230
e	mm	175	180	175	180
f	mm	560	570	560	570
g	mm	575	585	575	585
h	mm	G3/4	G3/4	G3/4	G3/4
CODE		3000326	3010895	3000327	3010899