THE NEW PRO1 R



/ MADE IN ITALY

/ WATER PLUS

/ 7 YEARS WARRANTY

/ DOUBLE SAFETY THERMOSTAT

/ TITANSHIELD TECHNOLOGY

PRO1 R

7 YEARS WARRANTY · WATER PLUS · EXTERNAL TEMPERATURE REGULATION · DOUBLE SAFETY THERMOSTAT · MADE IN ITALY · TITANSHIELD TECHNOLOGY · HIGH EFFICIENCY INSULATION



ADVANCED PERFORMANCE
- WaterPlus technology: up to 16 % more hot water available*
- Compliant with top ESWH regulations

FULL COMFORT
- External temperature setting
- Double safety thermostat

EVERLASTING QUALITY
- Robust insulation material (polyurethane)
- Magnesium anode to fight corrosion
- High quality titanium enameled tank
- 7 years warranty


EXCLUSIVE DESIGN
- Designed in Italy
- Modern shape with “Ariston wave”
- User-friendly interface with heating feedback

علامة الجودة الإماراتية
Emirates Quality Mark

7 years warranty

* Maximum estimated saving, depending on models. Comparison made using V40 test results at maximum operating temperature between current ATG products and new ATG products equipped with WaterPlus Technology.

TECHNICAL DATA		PRO1 R 50 V	PRO1 R 80 V	PRO1 R 80 V	PRO1 R 100 V	PRO1 R 100 V	PRO1 R 50 H	PRO1 R 80 H	PRO1 R 80 H	PRO1 R 80 H	PRO1 R 100 H	PRO1 R 100 H
Capacity	l	50	80	80	100	100	50	80	80	80	100	100
Installation		V	V	V	V	V	H	H	H	H	H	H
Size		Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular	Regular
Power	kW	1,5	1,5	2	1,5	2	1,2	1,2	1,5	2	1,5	3
Voltage	V	230	230	230	230	230	230	230	230	230	230	230
Heating time (ΔT=45°C)	h,min	1:45’	2:37’	1:58’	3:19’	2:29’	2:11’	2:22’	2:37’	1:30’	3:19’	1:10’
Heat dispersion at 65°C	kWh/24h	0,99	1,35	1,35	1,56	1,56	1,2	1,48	1,48	1,48	1,65	1,65
Max working pressure	bar	8	8	8	8	8	8	8	8	8	8	8
Max working temperature	°C	75	75	75	75	75	75	75	75	75	75	75
Weight	kg	17	22	22	26	26	17	22	22	22	26	26
Class	IP	IPX3	IPX3	IPX3	IPX3	IPX3	IPX1	IPX1	IPX1	IPX1	IPX1	IPX1
OVERALL DIMENSIONS												
a	mm	543	748	748	900	900	543	748	748	748	900	900
b	mm	380	585	585	737	737	-	-	-	-	-	-
c	mm	-	-	-	-	-	163	178	178	178	178	178
d	mm	-	-	-	-	-	159	334	334	334	486	486
CODE												
		3201977	3201978	3201811	3201979	3201812	3201980	3201920	3201981	3201935	3201982	3201935

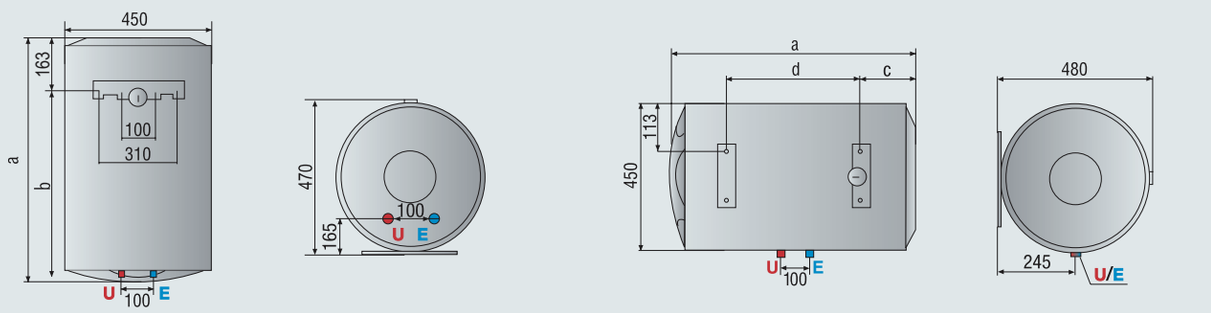

LEGEND
E Cold water inlet G 1/2”
U Hot water outlet G 1/2”