VSH XPress

Straight female connector, press-fit x BSP parallel female thread


SS2 Connector



General Information

Size	Pattern No.	Pack 1 Qty	Pack 2 Qty	Code	Barcode	Price (£) each ex VAT
15mm x 1/2" (A)	SS2	10	130	11641	8711985201611	£16.58
18mm x 1/2" (A)	SS2	10	120	11643	8711985201635	£17.48
22mm x 1/2"	SS2	10	100	11646	8711985201659	£18.68
22mm x 3/4"	SS2	10	100	11647	8711985201666	£21.98
28mm x 1/2"	SS2	10	40	11631	8711985261745	£27.50
28mm x 3/4"	SS2	10	40	11650	8711985201697	£30.19
28mm x 1"	SS2	10	60	11648	8711985201673	£34.10
35mm x 1"	SS2	10	20	11652	8711985201703	£36.23
35mm x 1.1/4"	SS2	10	30	11653	8711985201727	£37.31
35mm x 1.1/2"	SS2	10	20	11632	8711985201710	£37.31
42mm x 1.1/2"	SS2	4	24	11654	8711985201734	£57.42
54mm x 2"	SS2	4	12	11657	8711985201765	£85.92

SS2 Connector

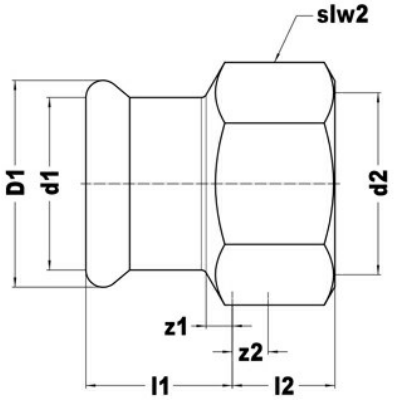

Dimensions

Code	Description	l1	d1	D1	es1	z1	l2	z2	slw2	sks2	DN1	DN2
11641	15mm x 1/2" SS2	22	15	23	20	2	15	5	24	28	DN12	1/2" (DN15)
11643	18mm x 1/2" SS2	22	18	26	20	2	15	5	27	31	DN15	1/2" (DN15)
11646	22mm x 1/2" SS2	21	22	32	21	0	15	5	32	37	DN20	1/2" (DN15)
11647	22mm x 3/4" SS2	23	22	32	21	2	17	6	32	37	DN20	3/4" (DN20)
11631	28mm x 1/2" SS2	26	28	37	23	3	12	1	38	44	DN25	1/2" (DN15)
11650	28mm x 3/4" SS2	23	28	37	23	23	0	17	6	38	DN25	3/4" (DN20)
11648	28mm x 1" SS2	25	28	37	23	2	20	6	38	44	DN25	1" (DN25)
11652	35mm x 1" SS2	27	35	44	26	1	20	7	46	53	DN32	1" (DN25)
11653	35mm x 1 1/4" SS2	28	35	44	26	2	22	7	46	53	DN32	1 1/4" (DN32)
11632	35mm x 1 1/2" SS2	28	35	44	26	2	22	8	54	62	DN32	1 1/2" (DN40)
11654	42mm x 1 1/2" SS2	32	42	54	30	2	22	8	54	62	DN40	1 1/2" (DN40)
11657	54mm x 2" SS2	37	54	65	35	2	26	8	67	77	DN50	2" (DN50)

Pegler Yorkshire reserve the right to change specifications

Guarantee

Pegler Yorkshire XPress Copper, Gas, Stainless and Solar fittings Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Pegler Yorkshire and the final purchaser of the product. When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

25 Years
The Xpress Copper, Gas, Stainless and Solar ranges are guaranteed for 25 years when installed along with other manufacturers' pipeline components conforming to the specified standard.

30 Years
Where pipelines are constructed exclusively from compatible XPress Copper, Gas, Stainless and Solar fittings and tubes, the resulting installations will be deemed XPress Systems and qualify for a 30 year guarantee. Qualifying systems are:

- Xpress Copper fittings and Yorkex* copper tube

- Xpress Gas fittings and Yorkex* copper tube
- Xpress Stainless fittings and stainless steel 316 System tube
- Xpress Solar fittings and Kuterlon* copper tube

* Yorkex and Kuterlon are brand names of Yorkshire Copper Tube/KME Group

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the consumer may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications, and does not cover parts subject to normal wear and tear.

This product range has been designed for the use of homeowners, domestic and commercial applications and therefore the Guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions in the fitting instructions.

This is reinforced where valves are covered by the European Pressure Equipment Directive (PED97/23/EC) where Installation, Operating and Maintenance Instructions are supplied with each product and/or carton.


Provided it is installed correctly and receives adequate preventative maintenance it should give years of trouble–free service.

Abusive behaviour and accidental damage to the product are not covered by this guarantee.


The extent of this liability is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Pressure and Temperature

XPress Fitting	Tube/pipe used with	Min temperature and pressure	Max temperature and pressure
XPress Stainless	Stainless Steel (12-108mm)	-35˚C at 16bar	135˚C at 16bar
XPress Stainless	Stainless Steel (139.7 -168.3mm)	-20˚C at 16bar	110˚C at 16bar



Pressure Loss Tables: Stainless Steel Water



Pressure Loss Tables: Stainless Steel Compressed Air

Care and Maintenance

Care
No regular aesthetic care is required for this product

Maintenance
No regular maintenance is required for this product.

For any further help please contact the Service Support Team on: 0800 1560050.