
BLACK STEEL ACCESS DOOR


BLACK STEEL ACCESS DOORS

The specially designed access door for the grease duct consist of an internal frame with integral stud and the external body fixed to the threads by using wing nut or hexagonal Nut, thus allowing a smooth internal surface which prevents the accumulation of grease . High temperature resistant ceramic gasket is used between the frame and body for an air tight seal which is also Non toxic, non health hazardous and environmental friendly.

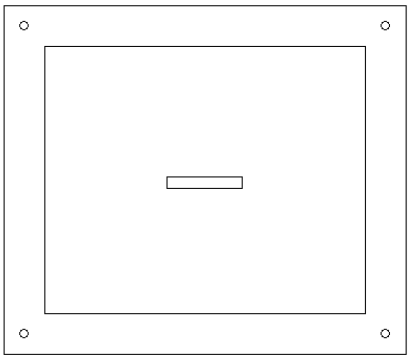

STANDARD CONSTRUCTION

Access door of 1.6 mm thickness external body with ceramic gasket and handle. Internal frame body with integral stud/bolt connection for fixing the door.

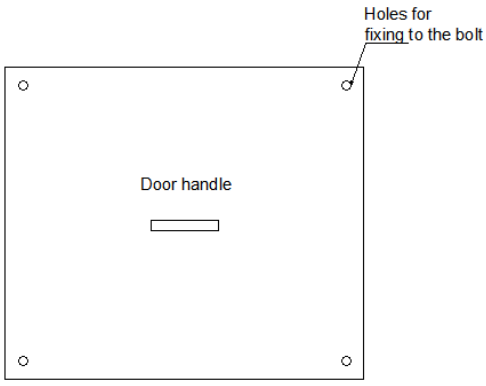


FEATURES

- Quick, easy installation wherever duct access is needed.
- Wing nut/hexagonal nut , assuring tight door closure.

FINISH:

Same as the duct.

STANDARD SIZES		
150x150	300x300	400x400
200x200	350x250	450x300
250x200	350x350	500x500
250x250	400x300	600x600

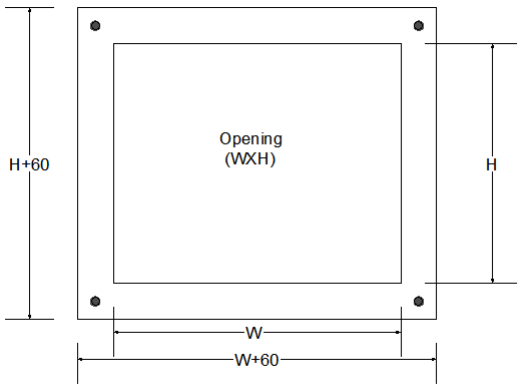

P.O. Box 94687, Abu Dhabi, U.A.E * Tel.: +971 2 5544605 * E-mail: sales@sascco.net * Website: www.sascco.net