CUBI

LED Undercupboard Lights

A range of 4 lengths of under-cupboard light fittings designed to suit UK standard cupboard sizes.

3YR WARRANTY | 3000K | 4000K



CCT Adjustable

To change the colour temperature simply turn the product on within 3 seconds of turning it off and the colour temperature will change between 3000K and 4000K. Turning the product on after more than 5 seconds of being off will restore the last set colour temperature.



Master On/Off

The Cubi can be linked to each other, the on/off switch of the luminaire in a connected series will turn both itself and the subsequent connected lights on/off. Therefore the user does not have to turn each individual section of lighting on/off. Translucent end-caps create a seamless aesthetic when the product is illuminated, reducing unsightly shadows.



Lead


1m 2x0.75mm² H03VVH2-F

End (female)

Polycarbonate, Semi Transparent

Main body extrusion

Polished polycarbonate, White (RAL 9016) + Semi Translucent. High Optic-Quality Diffuser is seamlessly moulded into the body using a two-shot forming process.

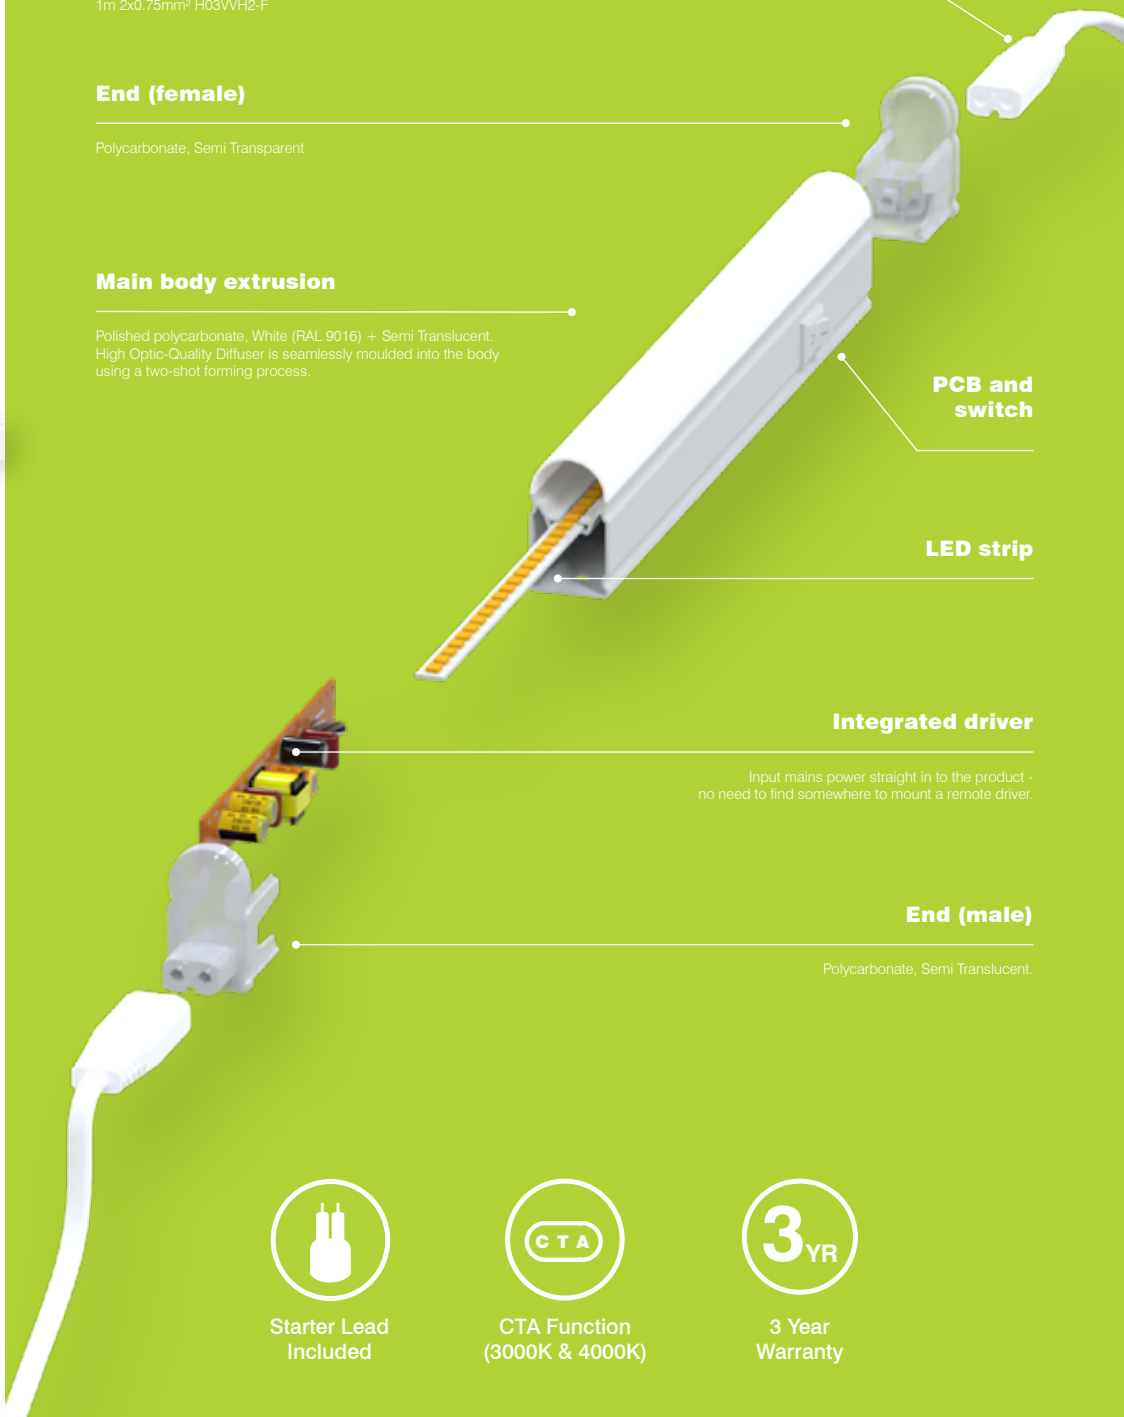

PCB and switch

LED strip

Integrated driver

Input mains power straight in to the product - no need to find somewhere to mount a remote driver.

End (male)

Polycarbonate, Semi Translucent.

Starter Lead Included

CTA Function (3000K & 4000K)

3 Year Warranty

LED Undercupboard Light - CTA Switchable

WARRANTY 3 YEAR | 130° BEAM ANGLE | 35,000 Hours LIFETIME | FLY LEAD INSTALLATION

AVAILABLE FINISHES

WHITE

KIT CONTAINS:
MOUNTING CLIPS
SCREWS
INPUT LEAD



COMPATIBLE PRODUCT:



CTA

COLOUR TEMPERATURE

WARM WHITE | COOL WHITE

CODE	DESCRIPTION
OV89215	3.5W 215mm Long - White

COMPATIBLE PRODUCTS	IEC 60320-1 EN 50525-2-11
OVLL89250	250mm Link Lead
OVLL89500	500mm Link Lead
OVLL891000	1000mm Link Lead



PRODUCT INFO

CCT (K)	3000K	4000K
Lumens	298lm	321lm
Efficacy	85lm/W	85lm/W
CRI	>80	
Beam Angle	130°	
LED Lifetime	35,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Operating Temp	-30°C - +40°C	
IP Rating	IP20	

Supplied with 1 Metre flylead

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62471 BS EN 62493 BS EN 62493 IEC/TR 62778 EN 61547 EN 55015 EN 61000-3-2 EN 61000-3-3

CE

LED Undercupboard Light - CTA Switchable

AVAILABLE FINISHES

WHITE

FLY LEAD INSTALLATION | 35,000 Hours LIFETIME | 130° BEAM ANGLE | WARRANTY 3 YEAR

KIT CONTAINS:
MOUNTING CLIPS
SCREWS
INPUT LEAD

COMPATIBLE PRODUCT:





COLOUR TEMPERATURE

WARM WHITE | COOL WHITE


CTA

CODE	DESCRIPTION
OV89515	8W 515mm Long - White

COMPATIBLE PRODUCTS	IEC 60320-1 EN 50525-2-11
OVLL89250	250mm Link Lead
OVLL89500	500mm Link Lead
OVLL891000	1000mm Link Lead

PRODUCT INFO

CCT (K)	3000K	4000K
Lumens	712lm	750lm
Efficacy	85lm/W	85lm/W
CRI	>80	
Beam Angle	130°	
LED Lifetime	35,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Operating Temp	-30°C - +40°C	
IP Rating	IP20	

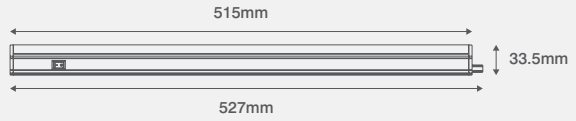

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62471 BS EN 62493 BS EN 62493 IEC/TR 62778 EN 61547 EN 55015 EN 61000-3-2 EN 61000-3-3

Supplied with 1 Metre flylead

CE

LED Undercupboard Light - CTA Switchable

WARRANTY 3 YEAR | 130° BEAM ANGLE | 35,000 Hours LIFETIME | FLY LEAD INSTALLATION

AVAILABLE FINISHES

WHITE

KIT CONTAINS:
MOUNTING CLIPS
SCREWS
INPUT LEAD



COMPATIBLE PRODUCT:



CTA


COLOUR TEMPERATURE

WARM WHITE | COOL WHITE

CODE	DESCRIPTION
OV89765	11W 765mm Long - White

COMPATIBLE PRODUCTS — IEC 60320-1 EN 50525-2-11

OVLL89250	250mm Link Lead
OVLL89500	500mm Link Lead
OVLL891000	1000mm Link Lead



PRODUCT INFO

CCT (K)	3000K	4000K
Lumens	970lm	1015lm
Efficacy	90lm/W	90lm/W
CRI	>80	
Beam Angle	130°	
LED Lifetime	35,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Operating Temp	-30°C - +40°C	
IP Rating	IP20	

Supplied with 1 Metre flylead

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62471 BS EN 62493 BS EN 62493 IEC/TR 62778 EN 61547 EN 55015 EN 61000-3-2 EN 61000-3-3

CE

LED Undercupboard Light - CTA Switchable

AVAILABLE FINISHES

WHITE

FLY LEAD INSTALLATION | 35,000 Hours LIFETIME | 130° BEAM ANGLE | WARRANTY 3 YEAR

KIT CONTAINS:
MOUNTING CLIPS
SCREWS
INPUT LEAD

COMPATIBLE PRODUCT:



COLOUR TEMPERATURE

WARM WHITE | COOL WHITE

CTA


PRODUCT INFO

CCT (K)	3000K	4000K
Lumens	1326lm	1371lm
Efficacy	90lm/W	90lm/W
CRI	>80	
Beam Angle	130°	
LED Lifetime	35,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Operating Temp	-30°C - +40°C	
IP Rating	IP20	

CODE	DESCRIPTION
OV891115	15W 1115mm Long - White

COMPATIBLE PRODUCTS — IEC 60320-1 EN 50525-2-11

OVLL89250	250mm Link Lead
OVLL89500	500mm Link Lead
OVLL891000	1000mm Link Lead



PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62471 BS EN 62493 BS EN 62493 IEC/TR 62778 EN 61547 EN 55015 EN 61000-3-2 EN 61000-3-3

Supplied with 1 Metre flylead

CE

12V IP44 1.6W LED Cast Starlight

WARRANTY

IP44 | 1 YEAR

AVAILABLE FINISHES

WHITE | SATIN CHROME | CHROME



CODE	DESCRIPTION
OV203DLWH	Recessed Circular Starlight - White
OV203DLCH	Recessed Circular Starlight - Chrome
OV203DLSC	Recessed Circular Starlight - Satin Chrome

COLOUR TEMPERATURE


DAYLIGHT

PRODUCT INFO

CCT (K)	6000K
Lumens	100lm
Wattage	1.6W
Voltage	12V DC
Lens Type	Opal

COMPATIBLE PRODUCTS See page 58

OVTR301	0.5-15Va 12V DC LED Driver (Non-dimmable)

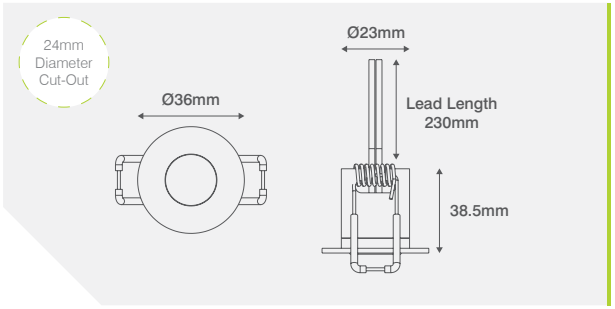

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

12V IP44 0.8W LED Plastic Starlight

AVAILABLE FINISHES

CHROME | SATIN CHROME | WHITE

WARRANTY

1 YEAR | IP44



COLOUR TEMPERATURE

DAYLIGHT


CODE	DESCRIPTION
OV204DLWH	Recessed Circular Starlight - White
OV204DLCH	Recessed Circular Starlight - Chrome
OV204DLSC	Recessed Circular Starlight - Satin Chrome

PRODUCT INFO

CCT (K)	6000K
Lumens	80lm
Wattage	0.8W
Voltage	12V DC
Lens Type	Clear

COMPATIBLE PRODUCTS See page 58

OVTR301	0.5-15Va 12V DC LED Driver (Non-dimmable)

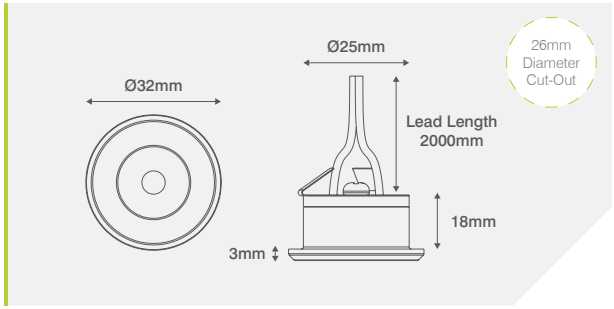

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

GU10 LED Lamps






COLOUR TEMPERATURE



CODE	DESCRIPTION
OVLA1005W4	4.8W GU10 LED Lamp - 2700K
OVLA1006C4	4.8W GU10 LED Lamp - 4000K

PRODUCT INFO

CCT (K)	2700K	4000K
Lumens	345lm	380lm
Efficacy	81lm/W	87lm/W
Wattage	4.8W	
CRI	>80	
Beam Angle	36°	
LED Lifetime	25,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Operating Temp	-20°C - +45°C	



PRODUCT APPROVALS

EN 62560 EN 62471 EN 62493 EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3

GU10 LED Lamps





COLOUR TEMPERATURE




PRODUCT INFO

CCT (K)	2700K	4000K
Lumens	345lm	380lm
Efficacy	78lm/W	84lm/W
Wattage	5W	
CRI	>80	
Beam Angle	36°	
LED Lifetime	25,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Yes	
Operating Temp	-20°C - +45°C	

CODE	DESCRIPTION
OVLA1007W5D	5W GU10 LED Dimmable Lamp - 2700K
OVLA1008C5D	5W GU10 LED Dimmable Lamp - 4000K

COMPATIBLE PRODUCTS

OVMD9014	100W Dual Mode LED Dimmer Module	See page 86



PRODUCT APPROVALS

EN 62560 EN 62471 EN 62493 EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3

3 Hour Universal Emergency Control Gear

IP20

WARRANTY 4 YEAR




Pre-wired flow™ Connector

CODE	DESCRIPTION
OVEMCG2305M3	5.2W Universal Emergency Pack

Compatible with Inceptor Omni, Inceptor Nano, Pico and Pico FG Downlights.

PRODUCT INFO	
Wattage	5.2W
Voltage	220-240V~
Frequency	50/60Hz
Operating Temp	+5°C - +40°C

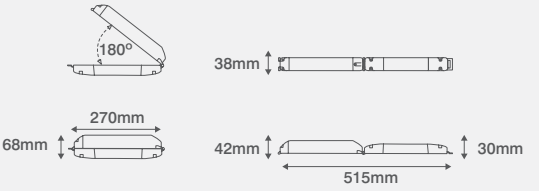

Prewired Flow™ Connectors

PRODUCT APPROVALS

IEC 61347-2-7 EN 55015 EN 61547 EN61000-3-2