U-LITE


Linear LED Lights

Our non-corrosive design, protected against the elements, U-Lite fittings are available in 3 different lengths and each length is available in a single fluorescent lamp equivalent and a twin lamp equivalent output.

IP65 | 5 YR WARRANTY | 4000K | 50,000 HRS | IK08

Slimline Design

Our twin retro fit alternative does not increase in width. Available in 3 different lengths...

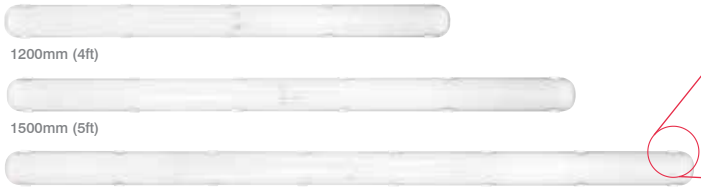


1200mm (4ft)

1500mm (5ft)

1800mm (6ft)

Pre-Fitted Anti Tamper Clips

Anti tamper clips allow the installer to screw the retaining clips so that others cannot open the light fitting without the use of a tool.



Captive Diffuser


By integrating the diffuser & gear tray and anchoring them to the base, the U-Lite ensures a hassle-free installation. Complete your installation without having to fully disassemble the product to mount and wire it.
Never lose parts! With everything you need pre-fitted to the base you'll never have to worry about misplaced control gear.



Easy Install

Our U-Lite LED lights are suitable for wall, ceiling or suspension mounting and its adjustable fixing centres allow for easy retrofit instalment.

The addition of Push Fit Terminals offers fast, simple and clear installation.

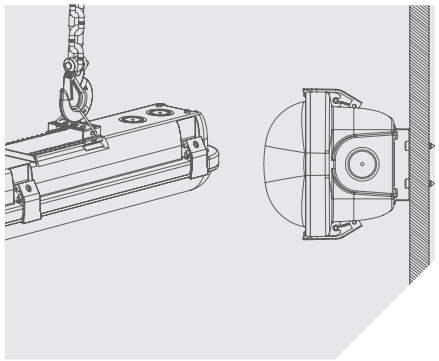


Transparent frosted polycarbonate cover

Dispenses light outward with an even light spread.

Microwave sensor (if applicable)

Motion detection to allow energy savings.

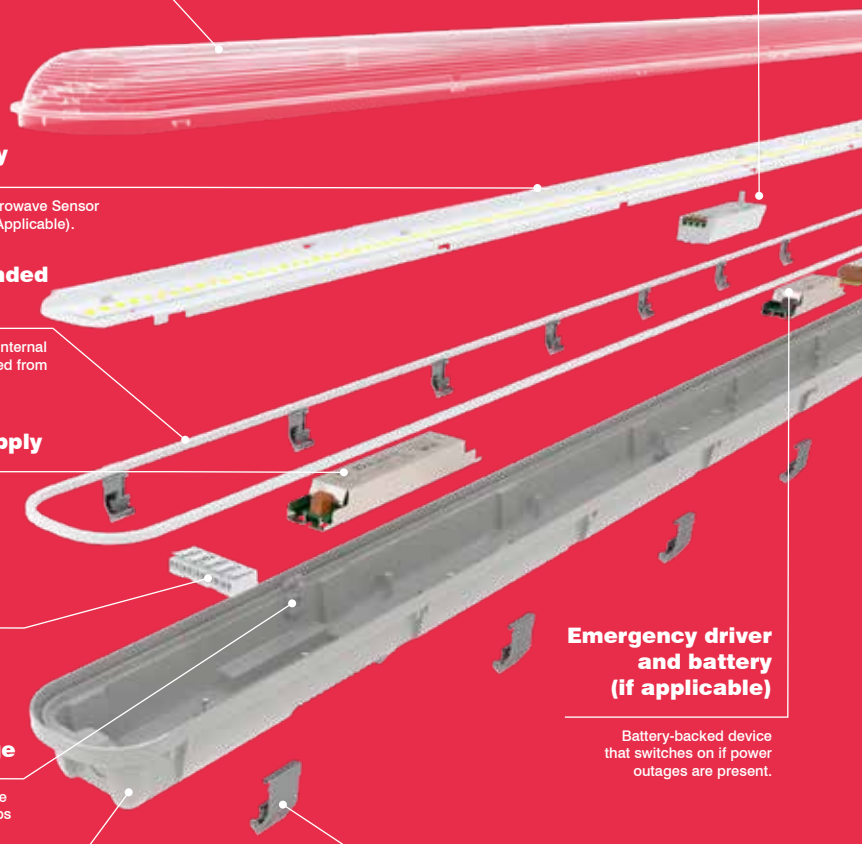

Steel gear tray

Holds the LED Strip, Microwave Sensor and Emergency LED (If Applicable).

IP rated expanded silicone seal

To Ensure the luminaire internal components are protected from the elements (IP65).

LED power supply

Allows power distribution to the Luminaire.

4/5 piano key terminal

For easy wiring and quick installation.

Emergency driver and battery (if applicable)

Battery-backed device that switches on if power outages are present.

Gear tray hinge

Safety aspect to allow the cover to not fall out if clips are opened.

Stainless steel assembly clips

Holds the base to the cover whilst making it quick and easy for the installer.

Light weight polycarbonate base

Holds all the internal components and drivers.

The image shown above demonstrates the microwave & emergency 6ft product.

Microwave Sensor Version Available

Emergency Version Available

IP65 Linear Utility LED Lights - 1200mm (4ft)

IP65 | WARRANTY 5 YEAR | 105° BEAM ANGLE | 50,000 Hours LIFETIME

AVAILABLE FINISHES


GREY



COLOUR TEMPERATURE

COOL WHITE

CODE	DESCRIPTION
OV80121	21W 1200mm LED Light
OV80121EM	23W 1200mm LED Light With Emergency
OV80121MW	21W 1200mm LED Light With Microwave
OV80121MWEM	23W 1200mm LED Light With Microwave & Emergency

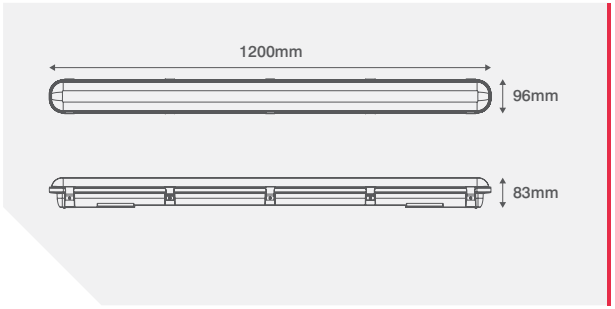

PRODUCT INFO

	Mains	Emergency
Wattage	21W	23W
Lumens	2520lm	2520lm
Lumens (Emergency)	N/A	300lm
Efficacy	120lm/W	110lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE

IP65 Linear Utility LED Lights - 1200mm (4ft)

AVAILABLE FINISHES

GREY

50,000 Hours LIFETIME | 105° BEAM ANGLE | WARRANTY 5 YEAR | IP65




COLOUR TEMPERATURE

COOL WHITE

PRODUCT INFO

	Mains	Emergency
Wattage	39W	41W
Lumens	4680lm	4680lm
Lumens (Emergency)	N/A	650lm
Efficacy	120lm/W	114lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

CODE	DESCRIPTION
OV80122	39W 1200mm LED Light
OV80122EM	41W 1200mm LED Light With Emergency
OV80122MW	39W 1200mm LED Light With Microwave
OV80122MWEM	41W 1200mm LED Light With Microwave & Emergency

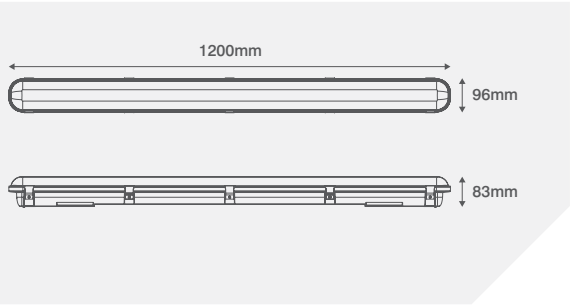

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE

IP65 Linear Utility LED Lights - 1500mm (5ft)

IP65 | WARRANTY 5 YEAR | 105° BEAM ANGLE | 50,000 Hours LIFETIME

AVAILABLE FINISHES


GREY



COLOUR TEMPERATURE

COOL WHITE

CODE	DESCRIPTION
OV80151	30W 1500mm LED Light
OV80151EM	32W 1500mm LED Light With Emergency
OV80151MW	30W 1500mm LED Light With Microwave
OV80151MWEM	32W 1500mm LED Light With Microwave & Emergency

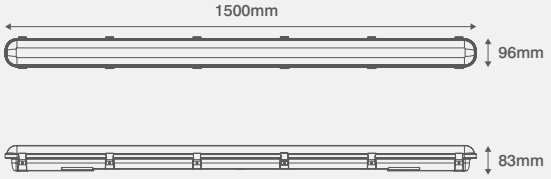

PRODUCT INFO

	Mains	Emergency
Wattage	30W	32W
Lumens	3600lm	3600lm
Lumens (Emergency)	N/A	300lm
Efficacy	120lm/W	113lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE

IP65 Linear Utility LED Lights - 1500mm (5ft)

AVAILABLE FINISHES

GREY

50,000 Hours LIFETIME | 105° BEAM ANGLE | WARRANTY 5 YEAR | IP65




COLOUR TEMPERATURE

COOL WHITE

PRODUCT INFO

	Mains	Emergency
Wattage	55W	57W
Lumens	6600lm	6600lm
Lumens (Emergency)	N/A	650lm
Efficacy	120lm/W	116lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

CODE	DESCRIPTION
OV80152	55W 1500mm LED Light
OV80152EM	57W 1500mm LED Light With Emergency
OV80152MW	55W 1500mm LED Light With Microwave
OV80152MWEM	57W 1500mm LED Light With Microwave & Emergency

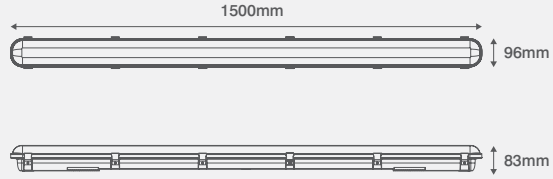

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE

IP65 Linear Utility LED Lights - 1800mm (6ft)

IP65 | WARRANTY 5 YEAR | 105° BEAM ANGLE | 50,000 Hours LIFETIME

AVAILABLE FINISHES


GREY



COLOUR TEMPERATURE

COOL WHITE

CODE	DESCRIPTION
OV80181	34W 1800mm LED Light
OV80181EM	36W 1800mm LED Light With Emergency
OV80181MW	34W 1800mm LED Light With Microwave
OV80181MWEM	36W 1800mm LED Light With Microwave & Emergency

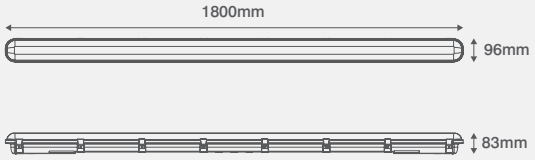

PRODUCT INFO

	Mains	Emergency
Wattage	34W	36W
Lumens	4080lm	4080lm
Lumens (Emergency)	N/A	350lm
Efficacy	120lm/W	113lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE

IP65 Linear Utility LED Lights - 1800mm (6ft)

AVAILABLE FINISHES

GREY

50,000 Hours LIFETIME | 105° BEAM ANGLE | WARRANTY 5 YEAR | IP65



COLOUR TEMPERATURE

COOL WHITE

PRODUCT INFO

	Mains	Emergency
Wattage	70W	72W
Lumens	8400lm	8400lm
Lumens (Emergency)	N/A	700lm
Efficacy	120lm/W	117lm/W
CCT (K)	4000K	
CRI	>80	
Beam Angle	105°	
LED Lifetime	50,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	

CODE	DESCRIPTION
OV80182	70W 1800mm LED Light
OV80182EM	72W 1800mm LED Light With Emergency
OV80182MW	70W 1800mm LED Light With Microwave
OV80182MWEM	72W 1800mm LED Light With Microwave & Emergency



PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 62493 EN 55015 EN 61547 EN61000-3-2 EN61000-3-3

CE