COMMERCIAL LIGHTING

A comprehensive range of products for your commercial environment. Panel lighting and downlights with multiple features and benefits with a variety of installation methods, including recessed, surface or suspended. Ovia® have a solution for any requirement.

From cost effective options to high spec solutions our ranges offer different colour temperature options and IP ratings to cover a range of applications.

For added convenience some lines come with prewired Push Fit Flow™ connectors for speed and ease of installation and there are also options for an emergency version within this extensive range.

Panels 116

Downlights 124



Inceptor® products to look out for in this section...

Switch 2 Inceptor

INCEPTOR® SLATE

Low UGR Diffuser

Low UGR diffuser making the Inceptor® Slate suitable for working environments.


5 YR WARRANTY | TP(A) | IP44

TP(A) Materials

The Building Regulations Approved Document B2 (buildings other than dwelling houses) places restrictions on the use of certain thermoplastic materials when they are used as lighting diffusers and form part of a ceiling. TP(a) rated materials may be used almost without restriction, but restrictions exist on the use of TP(b) rated materials. Inceptor® Slate ceiling panels are TP(a) as standard.

Installation Options

Suitable for a range of installation types. We have a Suspension Kit, Surface & Recessed Frames all available for use with the Inceptor® Slate ceiling panels.



Integrated Flow™ Connector

The Inceptor® Slate includes an prewired push-fit 3 Pole Flow™ connector for quick and easy installation.



Screws

These hold the whole assembly together.

Back


Steel, formed with a strengthening rib for added rigidity.

Foam packer

Compresses to keep other components in place.

DC connector lead (male)

The LED Driver connects here.

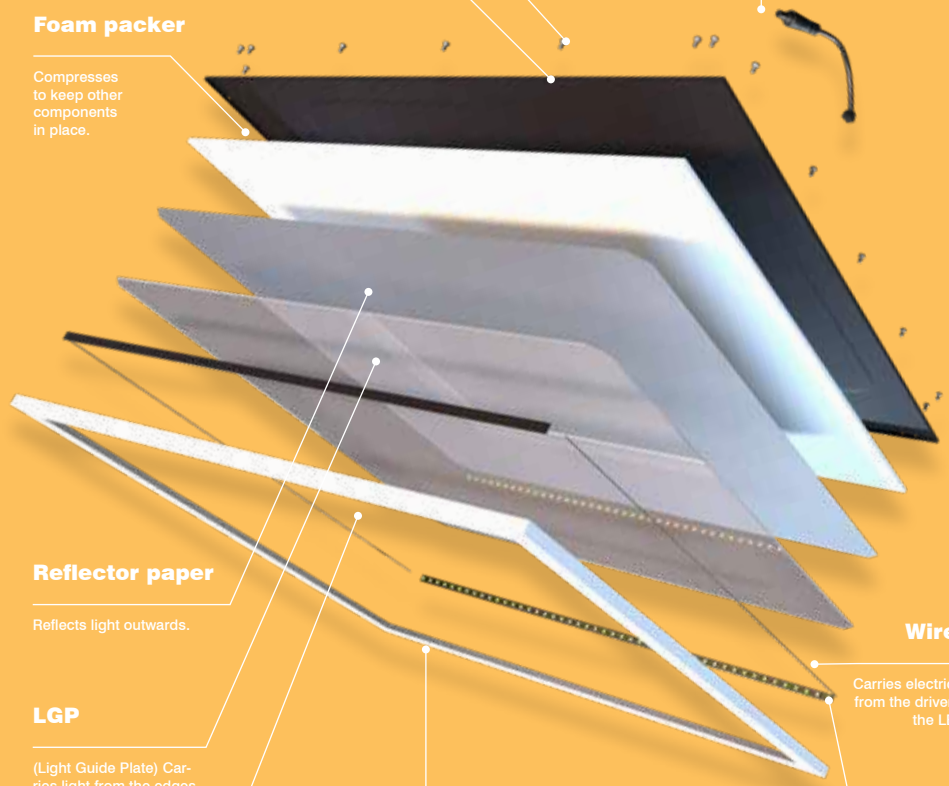

Reflector paper

Reflects light outwards.

LGP

(Light Guide Plate) Carries light from the edges of the panel outwards.

Diffuser

Disperses light outward.

Aluminium frame

Holds all the internal components.

Wires

Carries electricity from the driver to the LED.

LED strip

Two rows of LEDs on two opposite internal edges.

Suspension Brackets

UV Stabilised Diffuser

90° Beam Angle

30,000 Hour Lifetime

IP44 600mm x 600mm LED Panels

IP44 | WARRANTY 5 YEAR | FLAME RESISTANCE TP(A) | <19 UGR

AVAILABLE FINISHES

WHITE





Pre-wired flow™ Connector

CODE	DESCRIPTION
OV75301WW	30W LED Panel - 3000K - White
OV75301CW	30W LED Panel - 4000K - White

COLOUR TEMPERATURE


WARM WHITE | COOL WHITE

COMPATIBLE PRODUCTS

OVEMCG50	3 Hour Emergency Pack	See page 121
OVSURF731	600mm x 600mm Surface Frame Kit	See page 120
OVREC731	600mm x 600mm Recess Frame Kit	See page 120
OVSUSP731	Suspension Wire Kit	See page 120

PRODUCT INFO

CCT (K)	3000K	4000K
Lumens	3150lm	3250lm
Efficacy	105lm/W	105lm/W
Wattage	30W	
CRI	>80	
Beam Angle	90°	
LED Lifetime	30,000 Hours	
Voltage	220-240V~	
Frequency	50/60Hz	
Dimmable	Non-Dimmable	
Operating Temp	-20°C - +40°C	
UGR	<19	
Flammability Rating	TP(a)	





Complete with Remote Driver & prewired Flow™ Connector

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 61535

IP44 1200mm x 600mm LED Panel

AVAILABLE FINISHES

WHITE

Pre-wired flow™ Connector



COLOUR TEMPERATURE

COOL WHITE


CODE	DESCRIPTION
OV75503CW	50W LED Panel - 4000K - White

COMPATIBLE PRODUCTS

OVEMCG50	3 Hour Emergency Pack	See page 121
OVSURF733	1200mm x 600mm Surface Frame Kit	See page 120
OVSUSP733	Suspension Wire Kit	See page 120

PRODUCT INFO

CCT (K)	4000K
Lumens	5250lm
Efficacy	105lm/W
Wattage	50W
CRI	>80
Beam Angle	90°
LED Lifetime	30,000 Hours
Voltage	220-240V~
Frequency	50/60Hz
Dimmable	Non-Dimmable
Operating Temp	-20°C - +40°C
UGR	<19
Flammability Rating	TP(a)

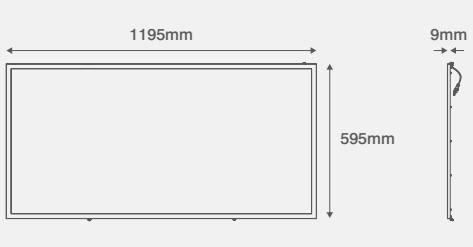

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 61535

Complete with Remote Driver & prewired Flow™ Connector

IP44 1200mm x 300mm LED Panel

IP44 | WARRANTY 5 YEAR | FLAME RESISTANCE TP(A) | <19 UGR

AVAILABLE FINISHES

WHITE



Pre-wired flow™ Connector

COLOUR TEMPERATURE

COOL WHITE

CODE	DESCRIPTION
OV75302CW	30W LED Panel - 4000K - White

COMPATIBLE PRODUCTS

OVEMCG50	3 Hour Emergency Pack	See page 121
OVSURF732	1200mm x 300mm Surface Frame Kit	See page 120
OVSUSP733	Suspension Wire Kit	See page 120



PRODUCT INFO

CCT (K)	4000K
Lumens	3250lm
Efficacy	105lm/W
Wattage	30W
CRI	>80
Beam Angle	90°
LED Lifetime	30,000 Hours
Voltage	220-240V~
Frequency	50/60Hz
Dimmable	Non-Dimmable
Operating Temp	-20°C - +40°C
UGR	<19
Flammability Rating	TP(a)

Complete with Remote Driver & prewired Flow™ Connector

PRODUCT APPROVALS


EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 61535

600mm x 600mm LED Panels

AVAILABLE FINISHES

WHITE

30,000 Hours LIFETIME | FLAME RESISTANCE TP(A) | 120° BEAM ANGLE | WARRANTY 3 YEAR





COLOUR TEMPERATURE

WARM WHITE | COOL WHITE | DAYLIGHT


CODE	DESCRIPTION
OV73301WW	30W LED Panel - 3000K - White
OV73301CW	30W LED Panel - 4000K - White
OV73301DL	30W LED Panel - 6000K - White

COMPATIBLE PRODUCTS

OVEMCG50	3 Hour Emergency Pack	See page 121
OVSURF731	600mm x 600mm Surface Frame Kit	See page 120
OVREC731	600mm x 600mm Recess Frame Kit	See page 120
OVSUSP731	Suspension Wire Kit	See page 120

PRODUCT INFO

CCT (K)	3000K	4000K	6000K
Lumens	2850lm	2900lm	2900lm
Efficacy	95lm/W	97lm/W	97lm/W
Wattage		30W	
CRI		>80	
Beam Angle		120°	
LED Lifetime		30,000 Hours	
Voltage		220-240V~	
Frequency		50/60Hz	
Dimmable		Non-Dimmable	
Operating Temp		-20°C - +40°C	

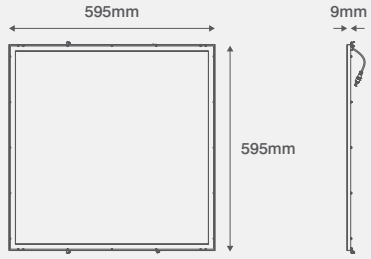

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

Complete with Remote Driver

Panel Light Accessories

WARRANTY 5 YEAR

AVAILABLE FINISHES: WHITE, CHROME





CODE	DESCRIPTION
OVREC731	600mm x 600mm Recess Frame
OVSURF731	600mm x 600mm Surface Frame
OVSURF732	1200mm x 600mm Surface Frame
OVSURF733	1200mm x 300mm Surface Frame
OVSUSP731	600mm x 600mm Suspension Kit
OVSUSP733	1200mm Long Panels Suspension Kit

3 Hour Emergency Control Gear


WARRANTY 4 YEAR

IP20



PRODUCT INFO	
Wattage	4W
Voltage	220-240V~
Frequency	50/60Hz
Operating Temp	0°C - +50°C

CODE	DESCRIPTION
OVEMCG50	4W Universal Emergency Pack

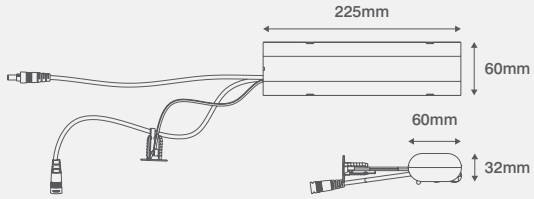

PRODUCT APPROVALS

Suitable for use with Inceptor® Slate, Jura & AluPanel (excluding 24W) Fittings

EN 61347-1: EN3147-2-7 EN 55015 EN61000-3-2 EN61000-3-3 EN 61547

CE