CAT6 KEYSTONE JACK, 180°, UNSHIELDED

P/N: KJUC6XX-180

superiOtec Category 6 Keystone Jacks 180° is ideal mounting for patch panel, shutters to sub floor boxes and work area distribution enclosure. Keystone jack has ABS plastic housing, compatible with 110 IDC punch down tools, conductors can be terminated and completed the installation process by snapping the cover.





APPLICATION			
Access Network	Data Center	Gigabit Ethernet 1000Base-TX	Video
Broadband	IPTV	Voice	Fast Ethernet 100Base-TX


FEATURES
RJ45 8P8C Jack
Color Coded for T568A & T568B wiring schemes
Compatible with IDC 110 tool
Fits into Keystone or Patch Panel
Backward Compatible with Cat3, 5, 5e
Terminating 4 pairs, 22-26AWG Cable

MATERIAL DETAILS	
RJ45 Jack Housing	PC+ABS
RJ45 Jack Contact	Material: Phosphor Bronze, Nickel Plated, Gold Plated on Plug Contact Area
IDC Housing	PC
IDC	Terminal: Phosphor Bronze, Tin Plated
PCB	FR4, Thickness: 1.6mm

SPECIFICATION	
Wiring Specification	T568A & T568B
Insertion Force	20N Max.
Retention Strength	7.7Kg between Jack & Plug
Operating Temperature	-10˚C to 60˚C

Mating Cycles	750 Min.
IDC Tool	IDC: Suitable for 22-26AWG Solid Wire IDC Compatible 110 punch down tool

DRAWING DETAIL

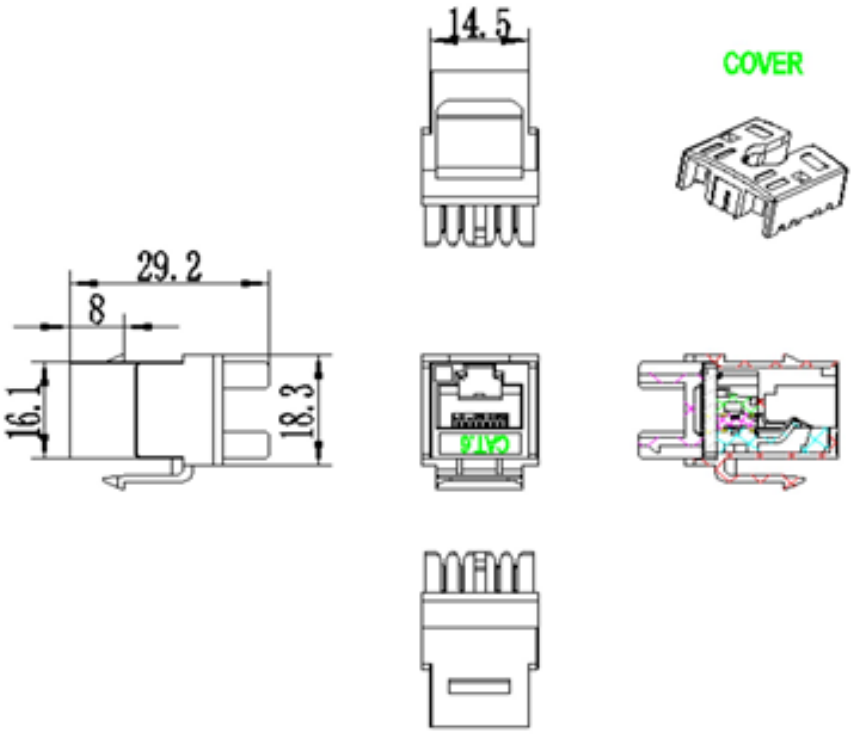

ORDERING INFORMATION

KJUC607-180	superiOrtec CAT6 RJ45, 180-DEG, KEYSTONE JACK, UNSHIELDED, 568A/B WIRING, WHITE
KJUC602-180	superiOrtec CAT6 RJ45, 180-DEG, KEYSTONE JACK, UNSHIELDED, 568A/B WIRING, BLACK