
superiOrtec Pigtails are factory terminated with standard superiOrtec standard connector which gives optimum optical performance.

Available in standard color based as per IEC 60304.

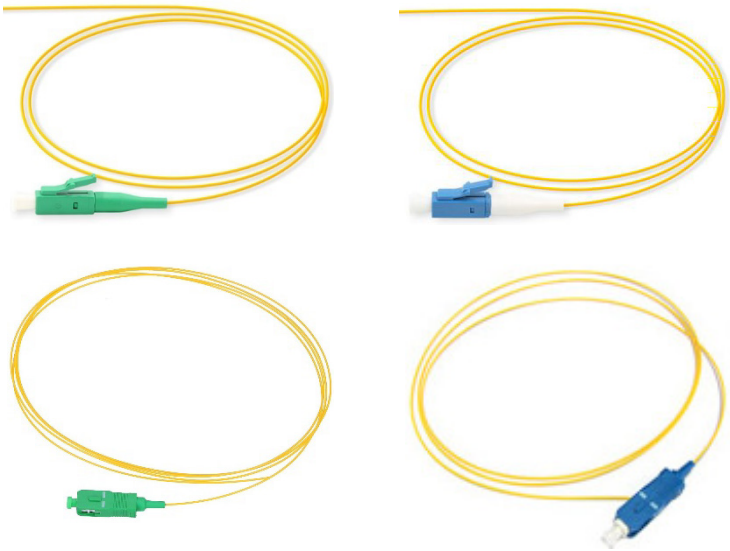

APPLICATION	
Telecommunication	CATV
LAN & WAN	Network
Broad band	FTTx

FEATURES	
Fiber Type	Singlemode & Multimode
Connector Type	LC, SC, FC, ST, Other Type available upon request
Jacket Size Flexibility	0.9mm, 2.0mm & 3.0mm
Jacket Type	PVC or LSZH
Contact Type	PC, UPC & APC

PARAMETER

ITEM	MODEL TYPE	PC	UPC	APC
Insertion Loss	SM	≤ 0.30dB	≤ 0.30dB	≤ 0.30dB
	MM	≤ 0.30dB	≤ 0.30dB	-
Return Loss	SM	≥ 45.0dB	≥ 50.0dB	≥ 60.0dB
	MM	≥ 35.0dB	≥ 45.0dB	-
Temperature Stability (-40°C~85°C)		Additional Loss ≤ 0.1dB, Return Loss		
		Variability < 5dB		

Operating Temperature	-40°C~+75°C
Storage Temperature	-40°C~+85°C

ORDERING INFORMATION	
PXXXYYNNNZZL	superiOrtec PIGTAIL FIBER TYPE (XXX), CONNECTOR TYPE (YY), CONTACT TYPE (NNN), LENGTH (ZZ), LSZH (L)
XXX	**Fiber Type:** (SM: 801/G.652.D, 807/G.657.A, 808/G.657.B) (MM: 625/OM1, 502/OM2, 503/OM3, 504/OM4)
YY	**Connector Type:** (LC, SC, ST, FC, E2000, Others)
NNN	**Contact Type:** (PC, UPC & APC)
ZZ	Length in Meters
L	(LSZH) Low Smoke Zero Halogen