

Sylveo LED 30000lm - Extra Extra Large

Sylveo LED 30000LM RASYM 4K
0049126



Product features

- Exterior LED Floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 32357lm, 301W, 107lm/W, 8400mA, CRI70, 52°x117° beam angle, 50000hrs, (LxWxD) 98x648x392mm



PRODUCT OVERVIEW

IPC Code	0049126
Product name	Sylveo LED 30000LM RASYM 4K
Technology	LED
Housing	Aluminium
Mount	Surface Mounting
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
Certifications	EUNEW005
ETIM Class	EC001744
E-number FI	4579184
E-number SE	7763406
Fixture luminous flux (lm)	32357
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52 x 117
Glare control	18.1
Photobiological Risk Group	RG1
Total power consumption (W)	301.3
Electrical protection	Class I
Control gear type	Electronic (constant current)
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491264
Lamps	No

Sylveo LED 30000lm - Extra Extra Large

Sylveo LED 30000LM RASYM 4K
0049126

Included lamp

INTEGRATED LED

DATA TABLE

General data

IPC Code	0049126
Product name	Sylveo LED 30000LM RASYM 4K
Technology	LED
Housing	Aluminium
Mount	Surface Mounting
Fixture rating	Enclosed
Environment	Internal/External
General application	Logistics & Industry
Operating temperature range (°C)	-40 to +45
Certifications	EUNEW005
ETIM Class	EC001744
E-number FI	4579184
E-number SE	7763406

Optical data

Fixture luminous flux (lm)	32357
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Adjustable chromaticity	N
Beam Angle (°)	52 x 117
Distribution type	Direct
Glare control	18.1
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	301.3
Current (A)	1.304
Mains voltage (V)	100-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	8400
Inrush Current (A)	60
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

Sylveo LED 30000lm - Extra Extra Large

Sylveo LED 30000LM RASYM 4K
0049126

LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	3
Max. Luminaires per 13A C Breaker	2
Max. Luminaires per 16A C Breaker	5
Max. Luminaires per 20A C Breaker	4

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	42000
Lumen maintenance - L70 B10	39000
Lumen maintenance - L80 B50	49000
Lumen maintenance - L80 B20	33600
Lumen maintenance - L80 B10	31200
Lumen maintenance - L90 B50	22000
Lumen maintenance - L90 B20	18480
Lumen maintenance - L90 B10	17160
Average life (Nominal) (h)	50000

Physical data

Vertical Tilt (°)	180
Horizontal rotation (°)	180
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Glass
Nominal Product Length (mm)	648
Nominal Product Width (mm)	98
Nominal Product Height (mm)	392
Weight (kg)	15.874
Wind Area (m²)	0.236



Packaging

Single packaging type	Carton
Product EAN number	5410288491264
Packaging single length / height (cm)	53.3
Packaging single width (cm)	70.4
Packaging single depth (cm)	16.6
DUN14 (outer)	05410288491264
Units per outer package	1
Packaging outer length / height (cm)	53.3
Packaging outer width (cm)	70.4
Packaging outer depth (cm)	16.6


PHOTOMETRY

Sylveo LED 30000lm - Extra Extra Large

Sylveo LED 30000LM RASYM 4K
0049126

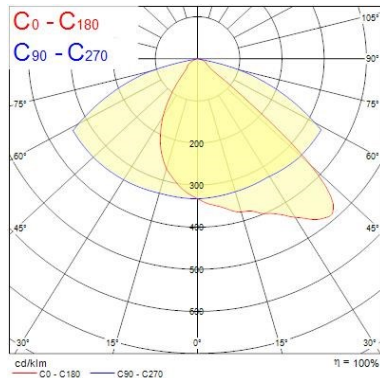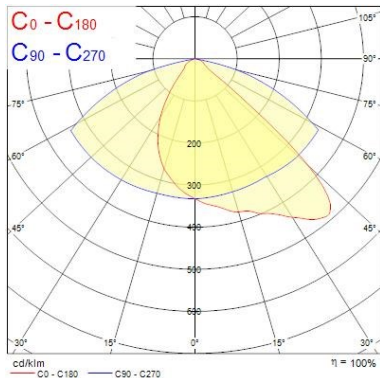

TECHNICAL DRAWINGS



SYLVANIA 0049126



This luminaire contains built in LED lamps.

A++

A+

A

B

C

D

E

L

E

D

The lamps cannot be changed in the luminaire.

874/2012


Sylveo LED 30000lm - Extra Extra Large

Sylveo LED 30000LM RASYM 4K
0049126

