Concord

Myriad V Residential LED - Housing only MYRDHS FL 4K DALIEM WHT 2058004



Product features

 The Myriad Housing 4000K Flood accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1023lm, luminaire efficacy 85lm/W. Colour rendering index Ra>80, Colour temperature 4000K, Beam angle 46ø, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



PRODUCT OVERVIEW

IPC Code	2058004
Product name	MYRDHS FL 4K DALIEM WHT
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (Im)	1023
Luminaire efficacy (Im/W)	85
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Beam Angle (°)	46
Luminous flux (emergency) (lm)	352
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	1
Average life (Nominal) (h)	50000
Housing colour	White Trim
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580040
Luminous flux (emergency) (Im)	352
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data		
IPC Code	2058004	


Myriad V Residential LED - Housing only MYRDHS FL 4K DALIEM WHT 2058004

Product name	MYRDHS FL 4K DALIEM WHT
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744
Optical data	
Fixture luminous flux (Im)	1023
Luminaire efficacy (Im/W)	85
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Luminous flux (emergency) (lm)	352
Emergency duration (h)	3
Emergency duration (ii)	5
Electrical data	
Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	1
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz
Lifetime data	
Average life (Nominal) (h)	50000
Physical data	
Housing colour	White Trim
IP rating	IP20
IK rating	IK02
Diffuser finish	White Trim
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Weight (kg)	1.39
Recessed Depth (mm)	72
Packaging	
	Octor
Single packaging type	Carton
Product EAN number	5025768580040
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0


Myriad V Residential LED - Housing only MYRDHS FL 4K DALIEM WHT 2058004

Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580040
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

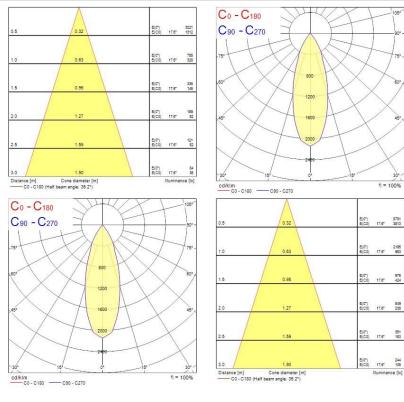

TECHNICAL DRAWINGS



Concord

Myriad V Residential LED - Housing only MYRDHS FL 4K DALIEM WHT 2058004

Concord 2058004	
This luminaire contains built in LED lamps.	
A ⁺⁺ A ⁺ A	
The lamps cannot be changed in the luminaire.	
874/2012	
This luminaire contains	A++
built in LED lamps.	Δ+

