

## Myriad V Residential LED - Housing only

### MYRDHS ST 3K PHDMEM BLK

### 2058011



#### Product features

- The Myriad Housing 3000K Spot accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1119lm, luminaire efficacy 93lm/W. Colour rendering index Ra>80, Colour temperature 3000K, Beam angle 28°, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.



## PRODUCT OVERVIEW

IPC Code	2058011
Product name	MYRDHS ST 3K PHDMEM BLK
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail, Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1119
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	28
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Black Trim
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580118
Lamps	Yes
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	2058011
----------	---------

## Myriad V Residential LED - Housing only

*MYRDHS ST 3K PHDMEM BLK*  
2058011

Product name	MYRDHS ST 3K PHDMEM BLK
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW008
ETIM Class	EC001744

### Optical data

Fixture luminous flux (lm)	1119
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

### Physical data

Housing colour	Black Trim
IP rating	IP20
IK rating	IK02
Diffuser finish	Black Trim
Reflector finish	Aluminium
Nominal Product Width (mm)	76
Nominal Product Height (mm)	72
Weight (kg)	1.39
Recessed Depth (mm)	72

### Packaging





Single packaging type	Carton
Product EAN number	5025768580118

## Myriad V Residential LED - Housing only


MYRDHS ST 3K PHDMEM BLK  
2058011

Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580118
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY

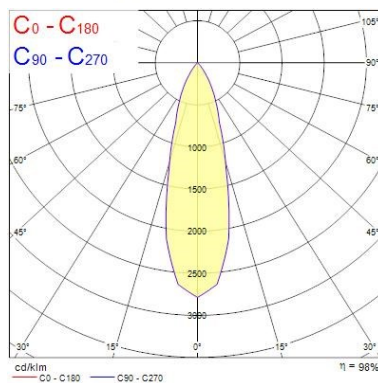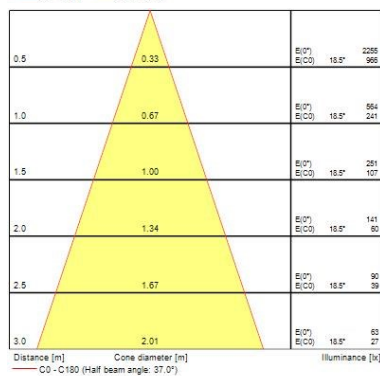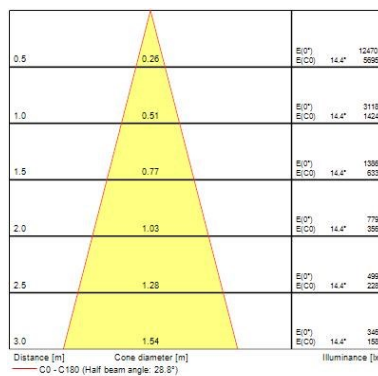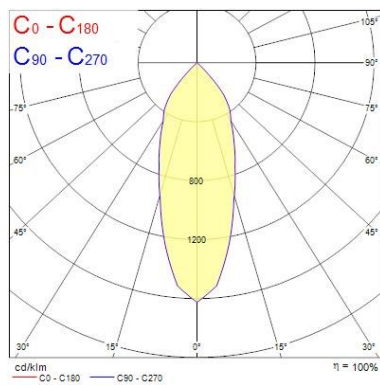

### TECHNICAL DRAWINGS



## Myriad V Residential LED - Housing only MYRDHS ST 3K PHDMEM BLK 2058011

