

## Skyline Street - Medium

*Skyline Street M 5-12klm NW WR35 I 9022*  
0066613



### Product features

- The Skyline Street family is dedicated for road lighting applications. Light distribution: WR35 - Wide Road, color temperature: 4000K, total system power: 103W, total fixture output: 12245lm, luminaire efficacy: 119lm/W, LOR: 100%, colour rendering index: 70, LED Chromaticity: 5 step MacAdam ellipse tolerance, lifetime: 100000 hours at L90B50 @ 50°C, energy class: A++, A+, A, operating voltage: 220-240V / 50-60Hz, electronic driver, Without Controls, power factor: min. 0.9, electrical protection: Class I, Ingress protection rating: IP66, Impact resistance: IK08, dimensions: 625x290x105mm, weight: 7 kg, for 42-60mm side entry or post top installation with +/-15° adjustability, the housing is made of Die Cast Aluminium in RAL9022 color combined with tempered flat glass cover.



### PRODUCT OVERVIEW

IPC Code	0066613
Product name	Skyline Street M 5-12klm NW WR35 I 9022
Technology	LED
Housing	LM6 Aluminium
Mount	Pole Fixed
Fixture rating	Enclosed
General application	Office,Hospitality,Retail,Logistics & Industry,Education,
Certifications	EUNEW029
ETIM Class	EC000062
Fixture luminous flux (lm)	12245
Luminaire efficacy (lm/W)	119
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	70
Photobiological Risk Group	RG1
Total power consumption (W)	103
Electrical protection	Class I
Control gear type	DALI
Dimmable	No
Housing colour	Grey (RAL 9022)
IP rating	IP66
IK rating	IK08
Product EAN number	5410288666136
Lamps	No

### DATA TABLE

#### General data

IPC Code	0066613
Product name	Skyline Street M 5-12klm NW WR35 I 9022
Technology	LED
Housing	LM6 Aluminium
Mount	Pole Fixed

## Skyline Street - Medium

*Skyline Street M 5-12klm NW WR35 I 9022*

0066613

Fixture rating	Enclosed
General application	Office,Hospitality,Retail,Logistics & Industry,Education,
Certifications	EUNEW029
ETIM Class	EC000062

### Optical data

Fixture luminous flux (lm)	12245
Luminaire efficacy (lm/W)	119
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	70
Distribution type	Wide Road WR35
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	103
Mains voltage (V)	220-240V~
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	8
Electrical protection	Class I
Control gear required	No
Control gear type	DALI
Dimmable	No
Drive current (mA)	700
Inrush Current (A)	53
Inrush Duration (µs)	300
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	8
Max. Luminaires per 13A C Breaker	10
Max. Luminaires per 16A C Breaker	13
Max. Luminaires per 20A C Breaker	16
Max. Luminaires per 10A B Breaker	5
Max. Luminaires per 13A B Breaker	6
Max. Luminaires per 16A B Breaker	8
Max. Luminaires per 20A B Breaker	10

### Lifetime data

Lumen maintenance - L70 B50	100000
Lumen maintenance - L80 B50	100000
Lumen maintenance - L90 B50	100000

### Physical data

Housing colour	Grey (RAL 9022)
IP rating	IP66
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Glass

## Skyline Street - Medium

Skyline Street M 5-12klm NW WR35 I 9022  
0066613

Nominal Product Length (mm)	625
Nominal Product Width (mm)	290
Nominal Product Height (mm)	105
Weight (kg)	7.0
Wind Area (m <sup>2</sup> )	0.04


### Packaging

Single packaging type	Carton
Product EAN number	5410288666136
Packaging single length / height (cm)	62.5
Packaging single width (cm)	29.0
Packaging single depth (cm)	10.5
DUN14 (outer)	05410288666136
Units per outer package	1
Packaging outer length / height (cm)	62.5
Packaging outer width (cm)	29.0
Packaging outer depth (cm)	10.5


### Safety data

Optimal operating condition (°C)	-40-50
----------------------------------	--------

## PHOTOMETRY

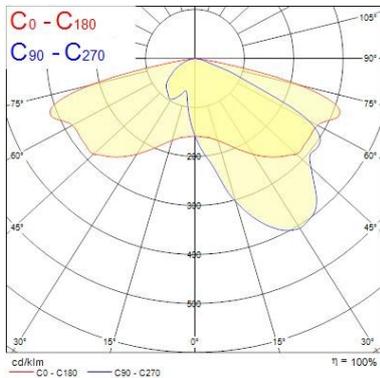

## TECHNICAL DRAWINGS




## Skyline Street - Medium

Skyline Street M 5-12klm NW WR35 I 9022

0066613

**SYLVANIA** 0066613


 This luminaire contains built in LED lamps.

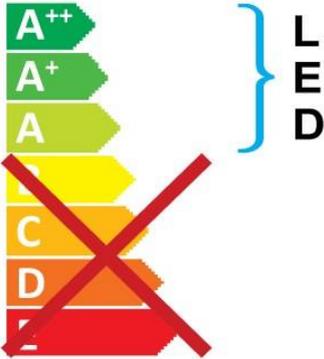

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

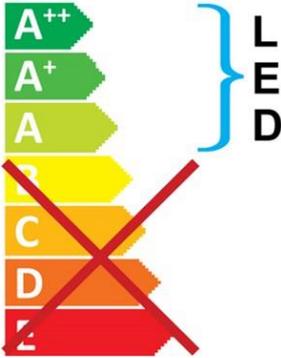

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0066613  874/2012