

Product features

 The Myriad Housing 3000K Flood accent downlight is a high efficient 12W recessed spotlight, luminous flux: 1037lm, luminaire efficacy 86lm/W. Colour rendering index Ra>80, Colour temperature 3000K, Beam angle 46ø, Average life rated at 50,000Hrs L70B50, Protection rating IP20, Cut out dimensions: 76mm.













PRODUCT OVERVIEW

| IPC Code | 2058024 |
|--------------------------------|--|
| Product name | MYRDHS FL 3K DALIEM BLK |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 1037 |
| Luminaire efficacy (lm/W) | 86 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Beam Angle (°) | 46 |
| Luminous flux (emergency) (lm) | 359 |
| Total power consumption (W) | 12 |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 1 |
| Average life (Nominal) (h) | 50000 |
| Housing colour | Black Trim |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768580248 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |
| | |

DATA TABLE

General data

IPC Code2058024Product nameMYRDHS FL 3K DALIEM BLK




| Technology | LED |
|--|--|
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Operating temperature rated (°C) | 25 |
| Certifications | EUNEW008 |
| ETIM Class | EC001744 |
| Optical data | |
| Fixture luminous flux (lm) | 1037 |
| Luminaire efficacy (Im/W) | 86 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 46 |
| Distribution type | Direct |
| Luminous flux (emergency) (lm) | 359 |
| Emergency duration (h) | 3 |
| Electrical data | |
| Total power consumption (W) | 12 |
| Mains voltage (V) | 230-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 250 |
| Nominal Frequency (Hz) | 50/60Hz |
| Lifetime data | |
| Average life (Nominal) (h) | 50000 |
| Physical data | |
| Housing colour | Black Trim |
| IP rating | IP20 |
| IK rating | IK02 |
| Diffuser finish | Black Trim |
| Reflector finish | Aluminium |
| Nominal Product Height (mm) | 72 |
| Weight (kg) | 1.39 |
| Recessed Depth (mm) | 72 |
| Packaging | |
| | Carton |
| Single packaging type Product EAN number | Carton |
| | 5025768580248 |
| Packaging single length / height (cm) | 17.5 15.0 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |



| DUN14 (outer) | 05025768580248 |
|--------------------------------------|----------------|
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |

PHOTOMETRY

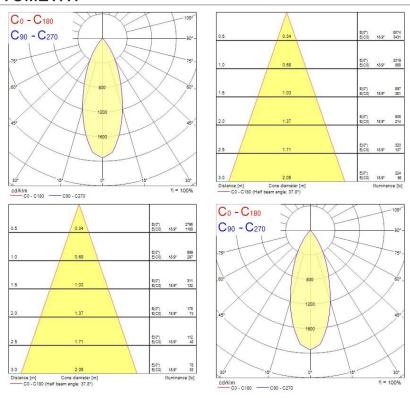

TECHNICAL DRAWINGS



