

## LumiStrip

### LumiStrip IP67 5M NW

### 3036895



#### Product features

- 5 metre neutral white IP67 silicon sleeved LED reel supplied with 25 x 200mm clear polycarbonate mounting strips which are pre-attached with 3M adhesive tape and 10 end caps, 1160 lumens, 24W, 48lm/W, 24V, 4000K, IP67, 50,000hrs (L70), (LxWxD) 5000x12.8x8mm



## PRODUCT OVERVIEW

IPC Code	3036895
Product name	LumiStrip IP67 5M NW
Technology	LED
Housing	Silicon
Mount	Surface Mounted
Environment	Internal/External
General application	Hospitality, Retail, Residential & Consumer
Certifications	EUNEW019
ETIM Class	EC002706
E-number FI	4270808
E-number SE	7558066
Fixture luminous flux (lm)	1160 (232/metre)
Luminaire efficacy (lm/W)	74.79
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Total power consumption (W)	24
Electrical protection	Class III
Control gear mounting	Remote
Average life (Nominal) (h)	50000
IP rating	IP67
Product EAN number	8711971368953
Lamps	Yes
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	3036895
Product name	LumiStrip IP67 5M NW
Technology	LED
Housing	Silicon

## LumiStrip

*LumiStrip IP67 5M NW*  
3036895

Mount	Surface Mounted
Environment	Internal/External
General application	Hospitality,Retail,Residential & Consumer
Operating temperature range (°C)	-25 to +50
Certifications	EUNEW019
ETIM Class	EC002706
E-number FI	4270808
E-number SE	7558066

### Optical data

Fixture luminous flux (lm)	1160 (232/metre)
Luminaire efficacy (lm/W)	74.79
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Direct

### Electrical data

Total power consumption (W)	24
Mains voltage (V)	24V
Electrical protection	Class III
Control gear mounting	Remote
Glow Wire Test (°C)	650

### Lifetime data

Average life (Nominal) (h)	50000
----------------------------	-------

### Physical data

IP rating	IP67
Diffuser finish	Clear
Diffuser material	Silicon
Nominal Product Length (mm)	5000
Nominal Product Width (mm)	12.8
Nominal Product Height (mm)	8
Weight (kg)	0.56


### Packaging

Single packaging type	Carton
Product EAN number	8711971368953
Packaging single length / height (cm)	22.7
Packaging single width (cm)	4.6
Packaging single depth (cm)	27.3
Units per outer package	9
Packaging outer length / height (cm)	42.9
Packaging outer width (cm)	30.7

## LumiStrip LumiStrip IP67 5M NW 3036895

Packaging outer depth (cm) 26.8


### PHOTOMETRY

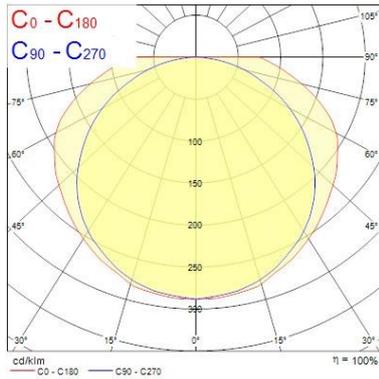

Distance [m]	Cone diameter [m]	Beam type	Illuminance [lx]
0.5	1.56 3.13	E(C0)	134
		E(C90)	11
1.0	3.12 6.27	E(C0)	33
		E(C90)	3
1.5	4.67 9.40	E(C0)	15
		E(C90)	1
2.0	6.23 12.53	E(C0)	8
		E(C90)	1
2.5	7.79 15.67	E(C0)	5
		E(C90)	0
3.0	9.35 18.80	E(C0)	4
		E(C90)	0

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 144.6°)  
 — C90 - C270 (Half beam angle: 114.6°)

### TECHNICAL DRAWINGS



## LumiStrip LumiStrip IP67 5M NW 3036895

**Lumiance** 3036895

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

**Lumiance** 3036895  874/2012