

Product features

• MYRIAD SS HOUS 4000K DALI EM













PRODUCT OVERVIEW

IPC Code	2049522
Product name	MYRIAD SS HOUS 4000K DALI EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	91
LOR (%)	100
Colour temperature (K)	4000
Beam Angle (°)	30
Luminous flux (emergency) (lm)	344
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	DALI + Emergency
Control gear mounting	Integral
IP rating	IP20
Product EAN number	5025768495221
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE


Product name MYRIAD SS HOUS 4000K DALI EM Technology LED Mount Ceiling recessed Environment Interior General application Museums & Galleries, Office, Retail, Residential & Consumer Certifications EUNEW008	General data	
Technology LED Mount Ceiling recessed Environment Interior General application Museums & Galleries, Office, Retail, Residential & Consumer	IPC Code	2049522
Mount Ceiling recessed Environment Interior General application Museums & Galleries, Office, Retail, Residential & Consumer	Product name	MYRIAD SS HOUS 4000K DALI EM
Environment Interior General application Museums & Galleries,Office,Retail,Residential & Consumer	Technology	LED
General application Museums & Galleries, Office, Retail, Residential & Consumer	Mount	Ceiling recessed
• • • • • • • • • • • • • • • • • • • •	Environment	Interior
Certifications EUNEW008	General application	Museums & Galleries, Office, Retail, Residential & Consumer
	Certifications	EUNEW008



ETIM Class	EC001744
Optical data	
Fixture luminous flux (lm)	1093
Luminaire efficacy (Im/W)	91
LOR (%)	100
Colour temperature (K)	4000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Luminous flux (emergency) (lm)	344
Electrical data	
Total power consumption (W)	12
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	DALI + Emergency
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz
Physical data	
IP rating	IP20
Weight (kg)	1.4
Recessed Depth (mm)	72
Packaging	
Single packaging type	Carton
Product EAN number	5025768495221
Packaging single length / height (cm)	27.5
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	12.5

PHOTOMETRY



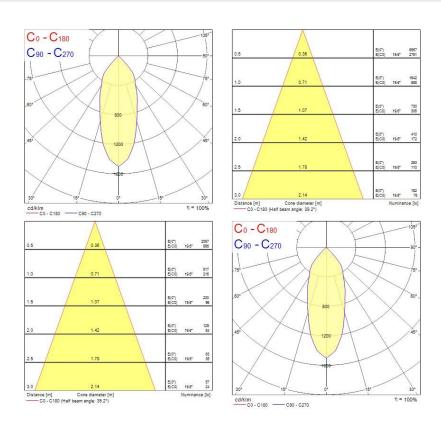

TECHNICAL DRAWINGS



