

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K DIM WH
2049525



Product features

- MYRIAD SS IP65 3000K DIM WH



PRODUCT OVERVIEW

IPC Code	2049525
Product name	MYRIAD SS IP65 3000K DIM WH
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
E-number SE	7462013
E-number Norway	3290231
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Integral
IP rating	IP65
Product EAN number	5025768495252
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2049525
Product name	MYRIAD SS IP65 3000K DIM WH
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K DIM WH

2049525

E-number SE	7462013
E-number Norway	3290231

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Physical data

IP rating	IP65
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.39
Recessed Depth (mm)	72


Packaging

Single packaging type	Carton
Product EAN number	5025768495252
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

Myriad V LED - IP65 Glass White Bezel


MYRIAD SS IP65 3000K DIM WH
2049525

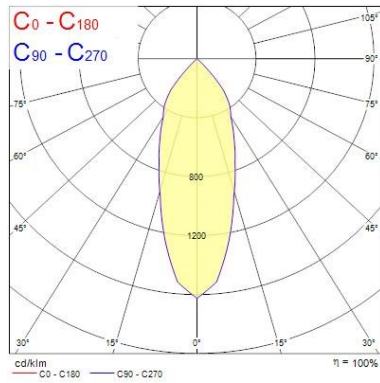

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.33	18.5°	6945
1.0	0.67	18.5°	1737
1.5	1.00	18.5°	772
2.0	1.34	18.5°	434
2.5	1.67	18.5°	278
3.0	2.01	18.5°	193

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 37.0°)

TECHNICAL DRAWINGS

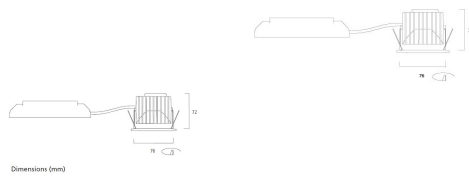

Dimensions (mm)

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K DIM WH
2049525

