

Myriad V LED - IP65 Glass White Bezel


MYRIAD SS IP65 3000K DIM WH EM

2049526



Product features

- MYRIAD SS IP65 3000K Phase dimmable with white bezel and 3hour emergencyWH EM



PRODUCT OVERVIEW

IPC Code	2049526
Product name	MYRIAD SS IP65 3000K DIM WH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	3000
Beam Angle (°)	30
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	DALI + Emergency
Control gear mounting	Integral
IP rating	IP65
IK rating	IK02
Product EAN number	5025768495269
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2049526
Product name	MYRIAD SS IP65 3000K DIM WH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K DIM WH EM

2049526

Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	3000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347

Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	DALI + Emergency
Control gear mounting	Integral
Transformer required	Yes
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
-----------------------------	-------

Physical data

IP rating	IP65
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.42
Recessed Depth (mm)	72


Packaging

Single packaging type	Carton
Product EAN number	5025768495269
Packaging single length / height (cm)	27.5
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768495269
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	12.5

Myriad V LED - IP65 Glass White Bezel


MYRIAD SS IP65 3000K DIM WH EM
2049526

PHOTOMETRY

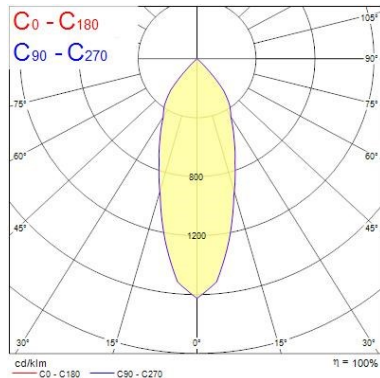

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.33	2288 966
1.0	0.67	564 241
1.5	1.00	261 107
2.0	1.34	141 58
2.5	1.67	90 39
3.0	2.01	63 27



Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 37.0°)

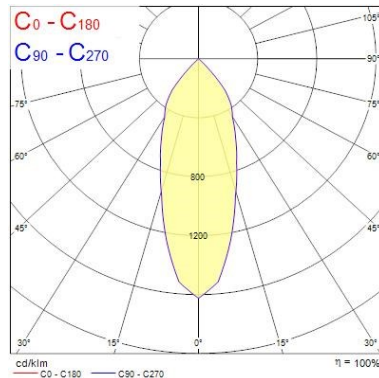

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.33	6948 2976
1.0	0.67	1737 744
1.5	1.00	772 331
2.0	1.34	434 186
2.5	1.67	278 119
3.0	2.01	190 83

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 37.0°)

TECHNICAL DRAWINGS



Dimensions (mm)

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K DIM WH EM
2049526

