

## Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K ELE WH  
2050667



### Product features

- MYRIAD SS IP65 3000K ELE WH



### PRODUCT OVERVIEW

IPC Code	2050667
Product name	MYRIAD SS IP65 3000K ELE WH
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
E-number SE	7462011
E-number Norway	3290230
Luminaire efficacy (lm/W)	62
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Housing colour	White
IP rating	IP65
Product EAN number	5025768506675
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	2050667
Product name	MYRIAD SS IP65 3000K ELE WH
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW008

## Myriad V LED - IP65 Glass White Bezel

*MYRIAD SS IP65 3000K ELE WH*  
2050667

ETIM Class	EC001744
E-number SE	7462011
E-number Norway	3290230

### Optical data

Luminaire efficacy (lm/W)	62
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Adjustable

### Electrical data

Total power consumption (W)	10
Mains voltage (V)	230V~
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

### Physical data

Housing colour	White
IP rating	IP65
Diffuser material	Glass
Max. Lamp Diameter (mm) - D	76
Weight (kg)	0.39
Recessed Depth (mm)	72

### Packaging

Single packaging type	Carton
Product EAN number	5025768506675
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


## PHOTOMETRY

## Myriad V LED - IP65 Glass White Bezel MYRIAD SS IP65 3000K ELE WH 2050667


0.5	0.28	E10° E10°	4580 2072
1.0	0.53	E10° E10°	1145 519
1.5	0.79	E10° E10°	609 230
2.0	1.06	E10° E10°	256 129
2.5	1.32	E10° E10°	183 83
3.0	1.59	E10° E10°	127 59

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 29.6°)

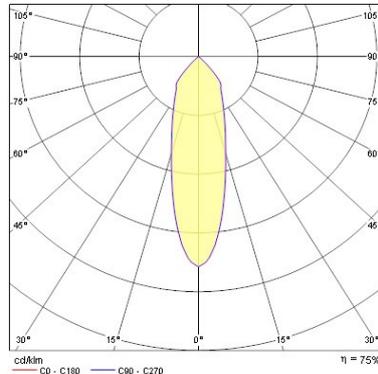

### TECHNICAL DRAWINGS



**Concord 2050667**

---

This luminaire contains built in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

## Myriad V LED - IP65 Glass White Bezel *MYRIAD SS IP65 3000K ELE WH* 2050667

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2050667 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~  
~~F~~

LED