

## Giotto LED 305

GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW  
3034781



### Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1491 lm, 19W, 78lm/W, 3000K, CRI 80, 1-10V dimmable, integral microwave sensor. 50,000 hours lumen maintenance. Drive current: 700mA, IP44, IK10, Class I, 220-240V, Energy class: A++, A+, A.



## PRODUCT OVERVIEW

IPC Code	3034781
Product name	GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW
Technology	LED
Housing	Polycarbonate
Environment	Internal, External
General application	Hospitality, Logistics & Industry
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4270201
Fixture luminous flux (lm)	1491
Luminous flux (lm)	1491
Luminaire efficacy (lm/W)	78
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Glare control	23.7
Photobiological Risk Group	0 (exempt)
Total power consumption (W)	19
Electrical protection	Class I
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347811
Lamps	No
Included lamp	INTEGRATED LED

## DATA TABLE

### General data

IPC Code	3034781
Product name	GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW
Technology	LED
Housing	Polycarbonate

## Giotto LED 305

*GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW*

3034781

Environment	Internal, External
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C to +25°C
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4270201

### Optical data

Fixture luminous flux (lm)	1491
Luminous flux (lm)	1491
Luminaire efficacy (lm/W)	78
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Distribution type	Direct
Glare control	23.7
Photobiological Risk Group	0 (exempt)

### Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Electrical protection	Class I
Drive current (mA)	700
Glow Wire Test (°C)	850
Lamp Energy Label (class)	A+
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 10A B Breaker	30
Max. Luminaires per 13A B Breaker	39
Max. Luminaires per 16A B Breaker	48
Max. Luminaires per 20A B Breaker	60

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	40000
Lumen maintenance - L90 B10	32000

### Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	Polycarbonate

## Giotto LED 305

GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW  
3034781

Nominal Product Length (mm)	305
Nominal Product Width (mm)	305
Nominal Product Height (mm)	104
Weight (kg)	1.11

### Packaging


Single packaging type	Carton
Product EAN number	8711971347811
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	10.0
DUN14 (outer)	08711971347811
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	10.0

## PHOTOMETRY


0.5	1.59	E(0°) E(C0)	57.8°	1838 139
1.0	3.18	E(0°) E(C0)	57.8°	459 35
1.5	4.76	E(0°) E(C0)	57.8°	204 15
2.0	6.35	E(0°) E(C0)	57.8°	115 9
2.5	7.94	E(0°) E(C0)	57.8°	73 6
3.0	9.53	E(0°) E(C0)	57.8°	51 4

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 115.6°)

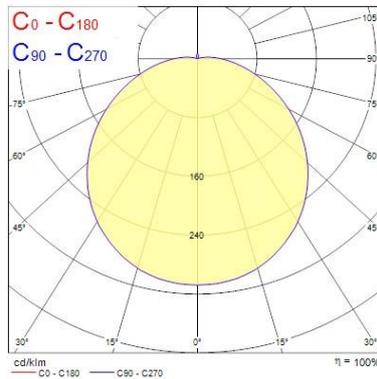

## TECHNICAL DRAWINGS



## Giotto LED 305

GIOTTO 305 MM LED G2 3000K SURFACE 1-10V MW

3034781

