

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 4K PHDMEM WHT WBEZ
2058866



Product features

- MYRIAD IP65 SPOT 4000K Phase dimmable with white reflector, white bezel and 3 hour emergency.



PRODUCT OVERVIEW

IPC Code	2058866
Product name	MYRD IP ST 4K PHDMEM WHT WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail, Residential & Consumer
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	94
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Beam Angle (°)	28
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	344
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	White Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768588664
Luminous flux (emergency) (lm)	344
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 4K PHDMEM WHT WBEZ
2058866

IPC Code	2058866
Product name	MYRD IP ST 4K PHDMEM WHT WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1132
Luminaire efficacy (lm/W)	94
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	344
Emergency duration (h)	3

Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data





Housing colour	White Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim White Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.44
Recessed Depth (mm)	72

Myriad V LED - IP65 Glass White Bezel
MYRD IP ST 4K PHDMEM WHT WBEZ
2058866


Packaging

Single packaging type	Carton
Product EAN number	5025768588664
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768588664
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

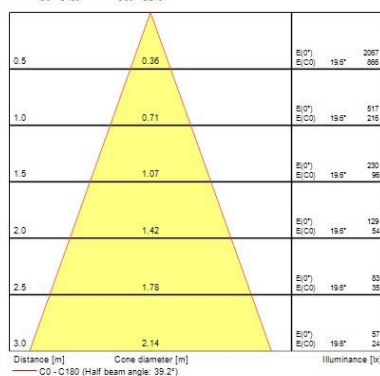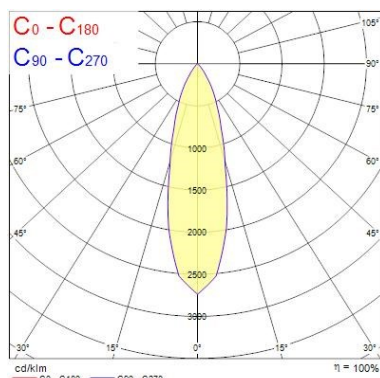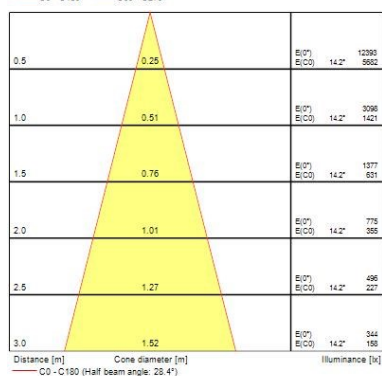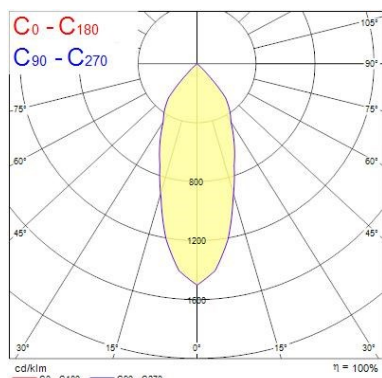

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 4K PHDMEM WHT WBEZ
2058866

