

## Expospot 90 cardan

EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE

0060356



### Product features

- Integrated LED triple gimbal accent downlight, trio head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 56°, optics: aluminium reflector and lens combination, colour temperature: 3000K warm white, total system power: 107W, total fixture output: 3x3736lm, 105lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 148x422mm, dimensions: 163x437x104mm, weight: 2.75kg.



## PRODUCT OVERVIEW

IPC Code	0060356
Product name	EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	3 x 3736
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	56
Photobiological Risk Group	RG1
Total power consumption (W)	107
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288603568
Lamps	No
Included lamp	INTEGRATED LED

## Expospot 90 cardan

EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE

0060356

### DATA TABLE

#### General data

IPC Code	0060356
Product name	EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE
Technology	LED
Housing	Aluminium
Mount	Recessed
Fixture rating	Enclosed
Environment	Internal
General application	Retail,
Certifications	EUNEW008
ETIM Class	EC001744

#### Optical data

Fixture luminous flux (lm)	3 x 3736
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	56
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	107
Mains voltage (V)	230-240V~
Lamp power factor	0.95
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic
Control gear mounting	Remote
Dimmable	N
Drive current (mA)	900
Inrush Current (A)	58.2
Inrush Duration (µs)	250
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	7
Max. Luminaires per 13A C Breaker	9
Max. Luminaires per 16A C Breaker	11
Max. Luminaires per 20A C Breaker	15
Max. Luminaires per 10A B Breaker	4
Max. Luminaires per 13A B Breaker	6
Max. Luminaires per 16A B Breaker	7
Max. Luminaires per 20A B Breaker	9

## Expospot 90 cardan

EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE

0060356

### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	55000


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Reflector finish	Metallised
Nominal Product Length (mm)	437
Nominal Product Width (mm)	163
Nominal Product Height (mm)	104
Weight (kg)	2.75
Recessed Depth (mm)	104

### Packaging

Single packaging type	Carton
Product EAN number	5410288603568
Packaging single length / height (cm)	50.0
Packaging single width (cm)	30.0
Packaging single depth (cm)	20.0
DUN14 (outer)	05410288603568
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	20.0

## PHOTOMETRY

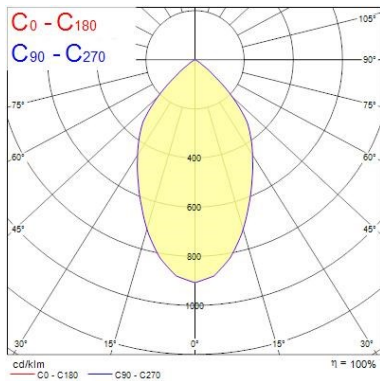

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10</sub> [lx]	E <sub>30</sub> [lx]
0.5	0.60	13556	3127	4278
1.0	1.20	3389	812	1070
1.5	1.80	1508	365	475
2.0	2.40	847	204	267
2.5	3.00	542	133	171
3.0	3.61	377	93	119


Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 62.0°)

## Expospot 90 cardan


EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE


0060356

### TECHNICAL DRAWINGS




**SYLVANIA** 0060356

 This luminaire contains built in LED lamps.

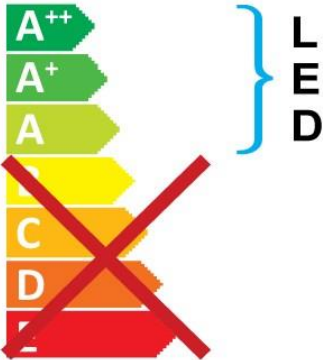 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

## Expospot 90 cardan


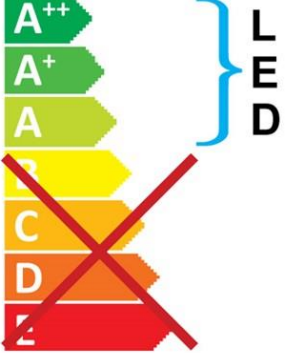
EXPOSPOT 90 TRIO HO RA80 3000K WB WHITE

0060356



This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



**SYLVANIA** 0060356 874/2012