Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 3K PHDMEM SIL WBEZ

2059243



Product features

- MYRIAD IP65 SPOT 3000K Phase dimmable with silver reflector, white bezel and 3 hour emergency

PRODUCT OVERVIEW

IPC Code	2059243
Product name	MYRD IP ST 3K PHDMEM SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1106
Luminous flux (lm)	932
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	28
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768592432
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

© Feilo Sylvania | Date Printed: 21 Nov 2018

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 3K PHDMEM SIL WBEZ

2059243

IPC Code	2059243
Product name	MYRD IP ST 3K PHDMEM SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1106
Luminous flux (lm)	932
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	28
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	347
Emergency duration (h)	3

Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim White Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.44
Recessed Depth (mm)	72

© Feilo Sylvania | Date Printed: 21 Nov 2018

Myriad V LED - IP65 Glass White Bezel


MYRD IP ST 3K PHDMEM SIL WBEZ


2059243


Packaging


Single packaging type	Carton
Product EAN number	5025768592432
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768592432
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

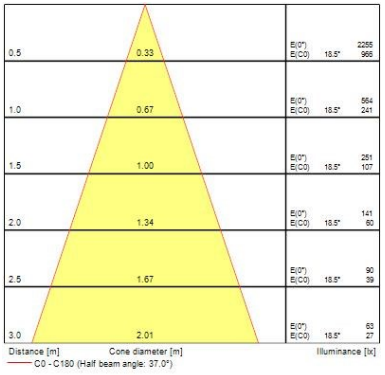


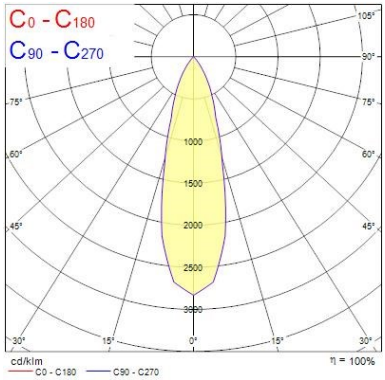

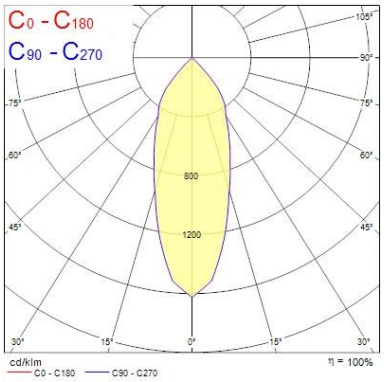

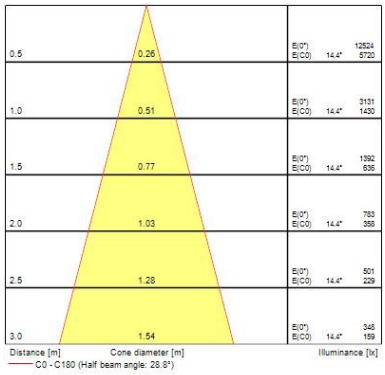

TECHNICAL DRAWINGS





© Feilo Sylvania | Date Printed: 21 Nov 2018

Myriad V LED - IP65 Glass White Bezel

MYRD IP ST 3K PHDMEM SIL WBEZ

2059243

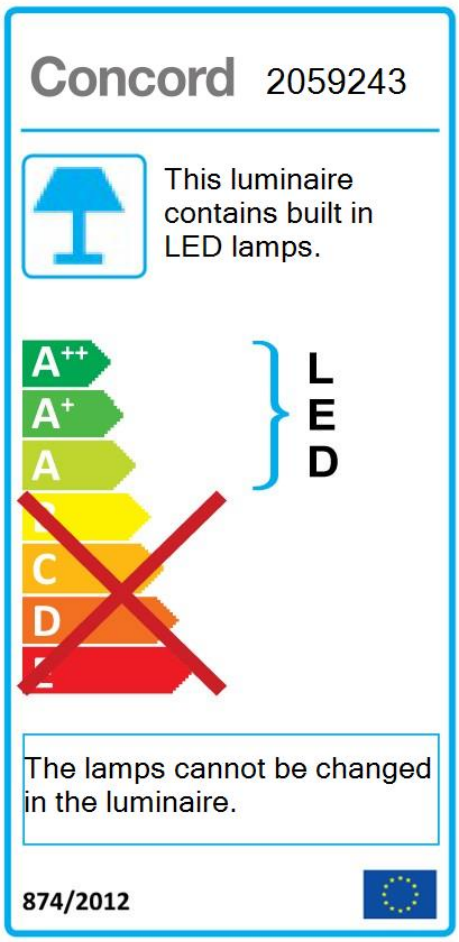

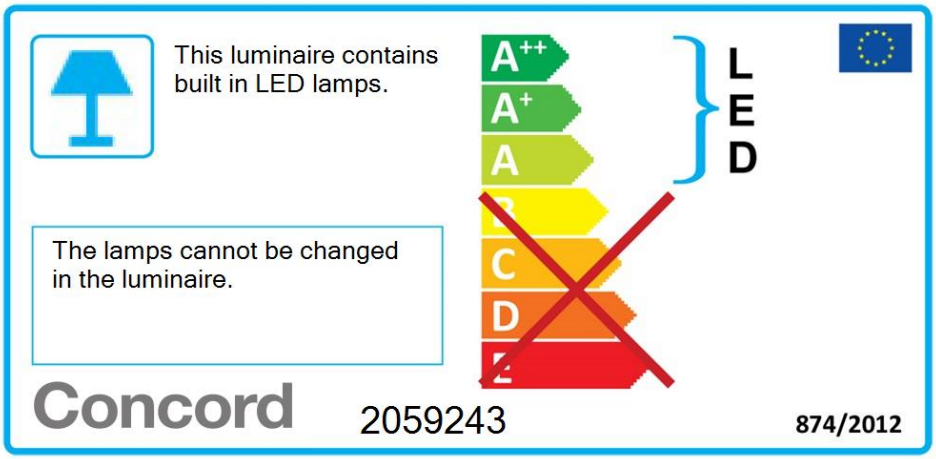

© Feilo Sylvania | Date Printed: 21 Nov 2018