

## Ascent 100 II Arch 120

ASCENT 100 II ARCH 650 3K DALI 120  
2060502



### Product features

- The ASCENT 100 II ARCH 650 3K DALI 120 is a high efficient DALI dimmable downlight luminaire, luminous flux: 638lm, luminaire efficacy: 128lm/W, Colour rendering index Ra >80, Colour temperature: 3000K Warm White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 137mm



## PRODUCT OVERVIEW

|                             |                                    |
|-----------------------------|------------------------------------|
| IPC Code                    | 2060502                            |
| Product name                | ASCENT 100 II ARCH 650 3K DALI 120 |
| Technology                  | LED                                |
| Housing                     | Aluminium                          |
| Mount                       | Ceiling recessed                   |
| General application         | Hospitality, Retail, Office,       |
| Certifications              | EUNEW008                           |
| ETIM Class                  | EC001744                           |
| E-number FI                 | 4260833                            |
| Fixture luminous flux (lm)  | 638                                |
| Luminaire efficacy (lm/W)   | 128                                |
| LOR (%)                     | 100                                |
| Colour temperature (K)      | 3000                               |
| CRI (Ra)                    | 80                                 |
| Colour Consistency (SDCM)   | 3                                  |
| Glare control               | 20.4                               |
| Photobiological Risk Group  | Group 0                            |
| Total power consumption (W) | 5                                  |
| Electrical protection       | Class II                           |
| Control gear type           | DALI                               |
| Control gear mounting       | Remote                             |
| Dimmable                    | Yes                                |
| Minimum dimming level (%)   | 1                                  |
| Housing colour              | White - RAL9016                    |
| IP rating                   | IP40                               |
| IK rating                   | IK02                               |
| Product EAN number          | 5025768605026                      |
| Lamps                       | Yes                                |
| Included lamp               | INTEGRATED LED                     |

## DATA TABLE

General data

## Ascent 100 II Arch 120

ASCENT 100 II ARCH 650 3K DALI 120  
2060502

|                                  |                                    |
|----------------------------------|------------------------------------|
| IPC Code                         | 2060502                            |
| Product name                     | ASCENT 100 II ARCH 650 3K DALI 120 |
| Technology                       | LED                                |
| Housing                          | Aluminium                          |
| Mount                            | Ceiling recessed                   |
| General application              | Hospitality,Retail,Office,         |
| Operating temperature range (°C) | 0-25                               |
| Certifications                   | EUNEW008                           |
| ETIM Class                       | EC001744                           |
| E-number FI                      | 4260833                            |

### Optical data

|                            |         |
|----------------------------|---------|
| Fixture luminous flux (lm) | 638     |
| Luminaire efficacy (lm/W)  | 128     |
| LOR (%)                    | 100     |
| Colour temperature (K)     | 3000    |
| CRI (Ra)                   | 80      |
| Colour Consistency (SDCM)  | 3       |
| Beam angle (Rated) (°)     | 85      |
| Distribution type          | Direct  |
| Glare control              | 20.4    |
| Photobiological Risk Group | Group 0 |

### Electrical data

|                                   |           |
|-----------------------------------|-----------|
| Total power consumption (W)       | 5         |
| Mains voltage (V)                 | 220-240V~ |
| Electrical protection             | Class II  |
| Control gear type                 | DALI      |
| Control gear mounting             | Remote    |
| Dimmable                          | Yes       |
| Minimum dimming level (%)         | 1         |
| Drive current (mA)                | 350       |
| Inrush Current (A)                | 45        |
| Inrush Duration (µs)              | 20        |
| Glow Wire Test (°C)               | 650       |
| Nominal Frequency (Hz)            | 50/60Hz   |
| Max. Luminaires per 10A C Breaker | 50        |
| Max. Luminaires per 16A C Breaker | 80        |

### Lifetime data

|                             |       |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 60000 |
| Lumen maintenance - L70 B20 | 60000 |
| Lumen maintenance - L70 B10 | 60000 |
| Lumen maintenance - L80 B50 | 60000 |
| Lumen maintenance - L80 B20 | 60000 |
| Lumen maintenance - L80 B10 | 60000 |
| Lumen maintenance - L90 B50 | 60000 |
| Lumen maintenance - L90 B20 | 48000 |
| Lumen maintenance - L90 B10 | 34000 |

## Ascent 100 II Arch 120

ASCENT 100 II ARCH 650 3K DALI 120  
2060502


### Physical data

|                               |                 |
|-------------------------------|-----------------|
| Housing colour                | White - RAL9016 |
| IP rating                     | IP40            |
| IK rating                     | IK02            |
| Diffuser finish               | Opal            |
| Diffuser material             | Acrylic         |
| Reflector finish              | Arch            |
| Nominal Product Width (mm)    | 150             |
| Nominal Product Height (mm)   | 94              |
| Nominal Product Diameter (mm) | 120             |
| Weight (kg)                   | 0.715           |

### Packaging

|                                       |                |
|---------------------------------------|----------------|
| Single packaging type                 | Carton         |
| Product EAN number                    | 5025768605026  |
| Packaging single length / height (cm) | 25.0           |
| Packaging single width (cm)           | 20.0           |
| Packaging single depth (cm)           | 25.0           |
| DUN14 (outer)                         | 05025768605026 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 25.0           |
| Packaging outer width (cm)            | 20.0           |
| Packaging outer depth (cm)            | 25.0           |

## PHOTOMETRY

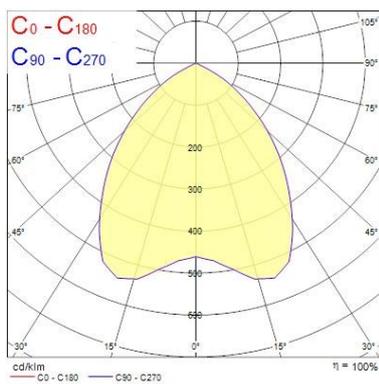


| Distance [m] | Cone diameter [m] | E(0°)<br>E(C0) | E(90°)<br>E(C90) | Illuminance [lx] |
|--------------|-------------------|----------------|------------------|------------------|
| 0.5          | 0.95              | 43.4*          | 1176             | 269              |
| 1.0          | 1.89              | 43.4*          | 294              | 67               |
| 1.5          | 2.84              | 43.4*          | 131              | 30               |
| 2.0          | 3.78              | 43.4*          | 73               | 17               |
| 2.5          | 4.73              | 43.4*          | 47               | 11               |
| 3.0          | 5.67              | 43.4*          | 33               | 7                |

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 86.8°)

## TECHNICAL DRAWINGS

Ascent 100 II Arch 120  
ASCENT 100 II ARCH 650 3K DALI 120  
2060502



**Concord** 2060502

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

Ascent 100 II Arch 120  
ASCENT 100 II ARCH 650 3K DALI 120  
2060502

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**Concord** 2060502 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED