

## Myriad V LED - IP65 Glass White Bezel

MYRD IP FL 3K PHDMEM SIL WBEZ  
2059255



### Product features

- MYRIAD IP65 FLOOD 3000K Phase dimmable with silver reflector, white bezel and 3 hour emergency.



### PRODUCT OVERVIEW

IPC Code	2059255
Product name	MYRD IP FL 3K PHDMEM SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	988
Luminous flux (lm)	753
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	46
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	359
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768592555
Lamps	Yes
Included lamp	INTEGRATED LED

### DATA TABLE

General data

## Myriad V LED - IP65 Glass White Bezel

*MYRD IP FL 3K PHDMEM SIL WBEZ*  
2059255

IPC Code	2059255
Product name	MYRD IP FL 3K PHDMEM SIL WBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail,Residential & Consumer
Operating temperature rated (°C)	25
Certifications	EUNEW001
ETIM Class	EC001744

### Optical data

Fixture luminous flux (lm)	988
Luminous flux (lm)	753
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	359
Emergency duration (h)	3

### Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

### Physical data



Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim White Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.44
Recessed Depth (mm)	72

## Myriad V LED - IP65 Glass White Bezel MYRD IP FL 3K PHDMEM SIL WBEZ 2059255

### Packaging

Single packaging type	Carton
Product EAN number	5025768592555
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768592555
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY

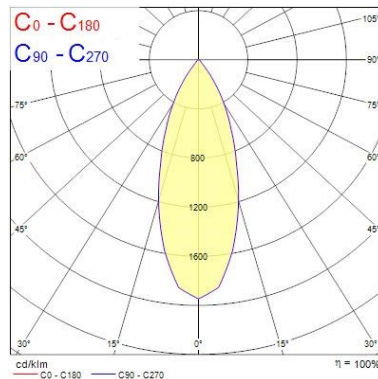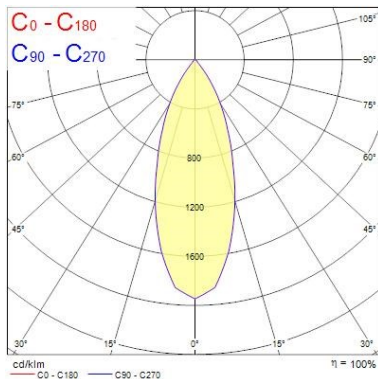


Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1/2</sub> [lx]	E <sub>1/10</sub> [lx]
0.5	0.34	7993	3289	18.9°
1.0	0.68	1923	817	18.9°
1.5	1.03	858	352	18.9°
2.0	1.37	481	204	18.9°
2.5	1.71	308	121	18.9°
3.0	2.05	214	91	18.9°

Distance [m]    Cone diameter [m]    Illuminance [lx]  
C0 - C180 (Half beam angle: 37.8°)

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1/2</sub> [lx]	E <sub>1/10</sub> [lx]
0.5	0.34	2796	1188	18.9°
1.0	0.68	699	297	18.9°
1.5	1.03	311	132	18.9°
2.0	1.37	175	74	18.9°
2.5	1.71	112	48	18.9°
3.0	2.05	73	33	18.9°

Distance [m]    Cone diameter [m]    Illuminance [lx]  
C0 - C180 (Half beam angle: 37.8°)


### TECHNICAL DRAWINGS




Dimensions (mm)


## Myriad V LED - IP65 Glass White Bezel MYRD IP FL 3K PHDMEM SIL WBEZ 2059255


**Concord** 2059255


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

**Concord** 2059255  874/2012