

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 3000K DIM CHR
2049527



Product features

- MYRIAD SS IP65 3000K Phase dimmable with chrome bezel



PRODUCT OVERVIEW

IPC Code	2049527
Product name	MYRIAD SS IP65 3000K DIM CHR
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Integral
IP rating	IP65
Product EAN number	5025768495276
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2049527
Product name	MYRIAD SS IP65 3000K DIM CHR
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality, Office, Retail
Certifications	EUNEW008
ETIM Class	EC001744

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 3000K DIM CHR
2049527

Optical data

Fixture luminous flux (lm)	1069
Luminaire efficacy (lm/W)	107
LOR (%)	100
Colour temperature (K)	3000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Dimmable
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Physical data

IP rating	IP65
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495276
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

Myriad V LED - IP65 Glass Chrome Bezel MYRIAD SS IP65 3000K DIM CHR 2049527


0.5	0.33	E(0°) E(C0)	18.5°	4948 2676
1.0	0.67	E(0°) E(C0)	18.5°	1737 744
1.5	1.00	E(0°) E(C0)	18.5°	772 331
2.0	1.34	E(0°) E(C0)	18.5°	434 186
2.5	1.67	E(0°) E(C0)	18.5°	273 119
3.0	2.01	E(0°) E(C0)	18.5°	183 83

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 37.0°)

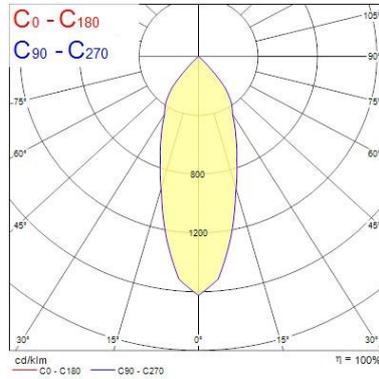

TECHNICAL DRAWINGS

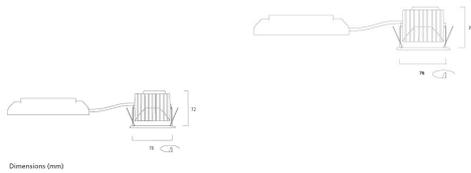

Myriad V LED - IP65 Glass Chrome Bezel MYRIAD SS IP65 3000K DIM CHR 2049527

Concord 2049527

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2049527  874/2012