

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K DIM CH EM
2049532



Product features

- MYRIAD SS IP65 4000K Phase dimmable emergency with chrome bezel



PRODUCT OVERVIEW

IPC Code	2049532
Product name	MYRIAD SS IP65 4000K DIM CH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Beam Angle (°)	30
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	344
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Dimmable + Emergency
Control gear mounting	Integral
IP rating	IP65
IK rating	IK02
Product EAN number	5025768495320
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2049532
Product name	MYRIAD SS IP65 4000K DIM CH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K DIM CH EM

2049532

Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	344

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Dimmable + Emergency
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	72000
-----------------------------	-------

Physical data

IP rating	IP65
IK rating	IK02
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.42
Recessed Depth (mm)	72


Packaging

Single packaging type	Carton
Product EAN number	5025768495320
Packaging single length / height (cm)	27.5
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768495320
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	12.5

Myriad V LED - IP65 Glass Chrome Bezel


MYRIAD SS IP65 4000K DIM CH EM
2049532

PHOTOMETRY

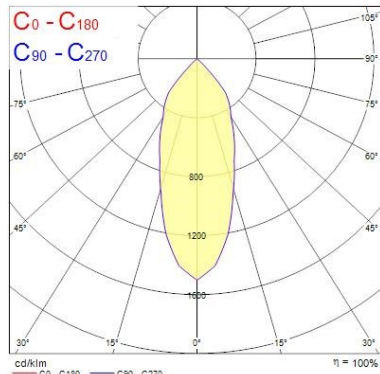

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.36	6308 2543
1.0	0.71	1577 661
1.5	1.07	701 294
2.0	1.42	394 155
2.5	1.78	252 106
3.0	2.14	175 73



Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 39.2°)

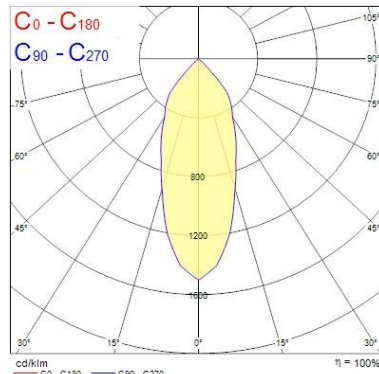

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.36	2067 866
1.0	0.71	517 216
1.5	1.07	230 96
2.0	1.42	129 54
2.5	1.78	83 35
3.0	2.14	57 24

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS



Dimensions (mm)

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K DIM CH EM
2049532

