

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K DALI CHR
2049543



Product features

- MYRIAD SS IP65 4000K DALI CHR



PRODUCT OVERVIEW

IPC Code	2049543
Product name	MYRIAD SS IP65 4000K DALI CHR
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Integral
IP rating	IP65
Product EAN number	5025768495436
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2049543
Product name	MYRIAD SS IP65 4000K DALI CHR
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K DALI CHR
2049543

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	105
LOR (%)	100
Colour temperature (K)	4000
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	DALI
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Physical data


IP rating	IP65
Diffuser material	Glass
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768495436
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY



Myriad V LED - IP65 Glass Chrome Bezel MYRIAD SS IP65 4000K DALI CHR 2049543

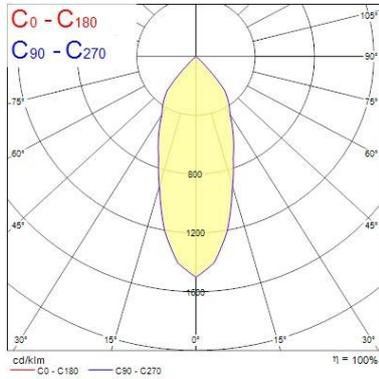

0.5	0.36	E(0°) E(C0)	19.8°	6308 2542
1.0	0.71	E(0°) E(C0)	19.8°	1577 551
1.5	1.07	E(0°) E(C0)	19.8°	731 254
2.0	1.42	E(0°) E(C0)	19.8°	394 135
2.5	1.78	E(0°) E(C0)	19.8°	252 106
3.0	2.14	E(0°) E(C0)	19.8°	175 73

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass Chrome Bezel MYRIAD SS IP65 4000K DALI CHR 2049543

Concord 2049543

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2049543 

874/2012