

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K ELE CHROM

2050673



Product features

- MYRIAD SS IP65 4000K ELE CHROME



PRODUCT OVERVIEW

IPC Code	2050673
Product name	MYRIAD SS IP65 4000K ELE CHROM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744
Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
IP rating	IP65
Product EAN number	5025768506736
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2050673
Product name	MYRIAD SS IP65 4000K ELE CHROM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW008
ETIM Class	EC001744

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K ELE CHROM
2050673

Optical data

Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical

Electrical data

Total power consumption (W)	10
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz



Physical data

IP rating	IP65
Diffuser material	Glass
Weight (kg)	0.39
Recessed Depth (mm)	72

Packaging

Single packaging type	Carton
Product EAN number	5025768506736
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5



PHOTOMETRY

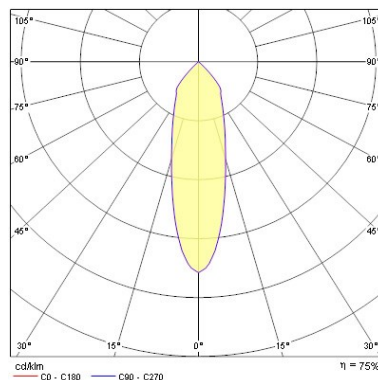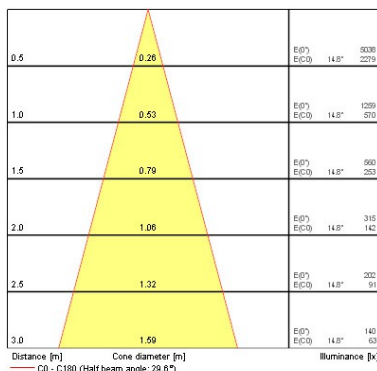

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K ELE CHROM
2050673

TECHNICAL DRAWINGS

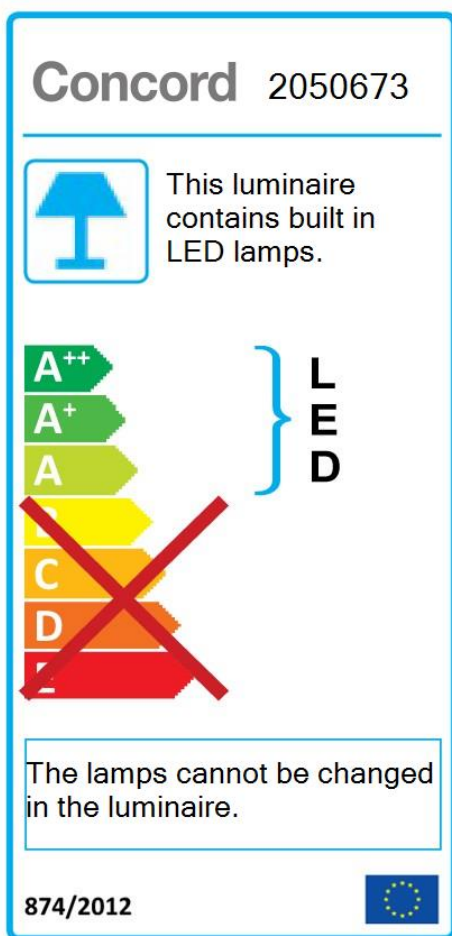

Myriad V LED - IP65 Glass Chrome Bezel

MYRIAD SS IP65 4000K ELE CHROM
2050673

