

Product features

• MYRIADSS IP65 4000K ELE CH EM













PRODUCT OVERVIEW

IPC Code	2050674
Product name	MYRIAD SS IP65 4000K ELE CH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001744
Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Beam Angle (°)	30
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic + Emergency
Control gear mounting	Integral
IP rating	IP65
Product EAN number	5025768506743
Included lamp	INTEGRATED LED

DATA TABLE


General data	
IPC Code	2050674
Product name	MYRIAD SS IP65 4000K ELE CH EM
Technology	LED
Mount	Ceiling recessed
Environment	Interior
General application	Hospitality,Office,Retail
Certifications	EUNEW001
ETIM Class	EC001744



Optical data	
Luminaire efficacy (Im/W)	68
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Electrical data	
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic + Emergency
Control gear mounting	Integral
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz
Physical data	
IP rating	IP65
Diffuser material	Glass
Weight (kg)	1.37
Recessed Depth (mm)	72
Packaging	
Single packaging type	Carton
Product EAN number	5025768506743
Packaging single length / height (cm)	27.5
Packaging single width (cm)	25.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768506743
Units per outer package	1
Packaging outer length / height (cm)	27.5
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	12.5

PHOTOMETRY



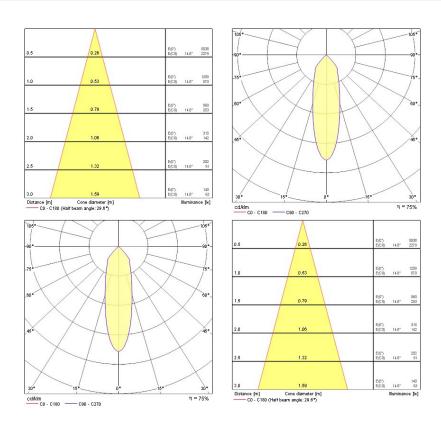

TECHNICAL DRAWINGS



