# Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP ST 3K PHDMEM SIL CBEZ*

**2058910**



**Product features**

- MYRIAD IP65 SPOT 3000K Phase dimmable with silver reflector, chome bezel and 3 hour emergency

## PRODUCT OVERVIEW

| | |
|---|---|
| **IPC Code** | 2058910 |
| **Product name** | MYRD IP ST 3K PHDMEM SIL CBEZ |
| **Technology** | LED |
| **Housing** | Aluminium |
| **Mount** | Ceiling recessed |
| **Environment** | Integral |
| **General application** | Hospitality,Office,Retail |
| **Certifications** | EUNEW001 |
| **ETIM Class** | EC001744 |
| **Fixture luminous flux (lm)** | 1106 |
| **Luminaire efficacy (lm/W)** | 92 |
| **LOR (%)** | 100 |
| **Colour temperature (K)** | 3000 |
| **CRI (Ra)** | 85 |
| **Beam Angle (°)** | 28 |
| **Photobiological Risk Group** | - |
| **Luminous flux (emergency) (lm)** | 347 |
| **Total power consumption (W)** | 12 |
| **Electrical protection** | Class II |
| **Control gear type** | Electronic |
| **Minimum dimming level (%)** | 10 |
| **Average life (Nominal) (h)** | 50000 |
| **Housing colour** | Silver Trim |
| **IP rating** | IP65 |
| **IK rating** | IK02 |
| **Product EAN number** | 5025768589104 |
| **Lamps** | Yes |
| **Included lamp** | INTEGRATED LED |

## DATA TABLE

### General data

| | |
|---|---|
| **IPC Code** | 2058910 |



© Feilo Sylvania | Date Printed: 22 Nov 2018

# Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP ST 3K PHDMEM SIL CBEZ*

**2058910**

| | |
|---|---|
| **Product name** | MYRD IP ST 3K PHDMEM SIL CBEZ |
| **Technology** | LED |
| **Housing** | Aluminium |
| **Mount** | Ceiling recessed |
| **Environment** | Integral |
| **General application** | Hospitality,Office,Retail |
| **Operating temperature rated (°C)** | 25 |
| **Certifications** | EUNEW001 |
| **ETIM Class** | EC001744 |

## Optical data

| | |
|---|---|
| **Fixture luminous flux (lm)** | 1106 |
| **Luminaire efficacy (lm/W)** | 92 |
| **LOR (%)** | 100 |
| **Colour temperature (K)** | 3000 |
| **CRI (Ra)** | 85 |
| **Adjustable chromaticity** | N |
| **Beam Angle (°)** | 28 |
| **Distribution type** | Direct |
| **Photobiological Risk Group** | - |
| **Luminous flux (emergency) (lm)** | 347 |
| **Emergency duration (h)** | 3 |

## Electrical data

| | |
|---|---|
| **Total power consumption (W)** | 12 |
| **Mains voltage (V)** | 230-240V~ |
| **Electrical protection** | Class II |
| **Control gear type** | Electronic |
| **Transformer required** | Yes |
| **Minimum dimming level (%)** | 10 |
| **Nominal Frequency (Hz)** | 50/60Hz |

## Lifetime data

| | |
|---|---|
| **Lumen maintenance - L70 B50** | 50000 |
| **Average life (Nominal) (h)** | 50000 |

## Physical data

| | |
|---|---|
| **Housing colour** | Silver Trim |
| **IP rating** | IP65 |
| **IK rating** | IK02 |
| **Diffuser finish** | Silver Trim Chrome Bezel |
| **Reflector finish** | Aluminium |
| **Nominal Product Height (mm)** | 72 |
| **Nominal Product Diameter (mm)** | 90 |
| **Weight (kg)** | 1.44 |
| **Recessed Depth (mm)** | 72 |

## Packaging

| | |
|---|---|
| **Single packaging type** | Carton |



© Feilo Sylvania | Date Printed: 22 Nov 2018


# Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP ST 3K PHDMEM SIL CBEZ*


**2058910**

| | |
|---|---|
| **Product EAN number** | 5025768589104 |
| **Packaging single length / height (cm)** | 17.5 |
| **Packaging single width (cm)** | 15.0 |
| **Packaging single depth (cm)** | 17.5 |
| **DUN14 (outer)** | 05025768589104 |
| **Units per outer package** | 1 |
| **Packaging outer length / height (cm)** | 17.5 |
| **Packaging outer width (cm)** | 15.0 |
| **Packaging outer depth (cm)** | 17.5 |

## PHOTOMETRY

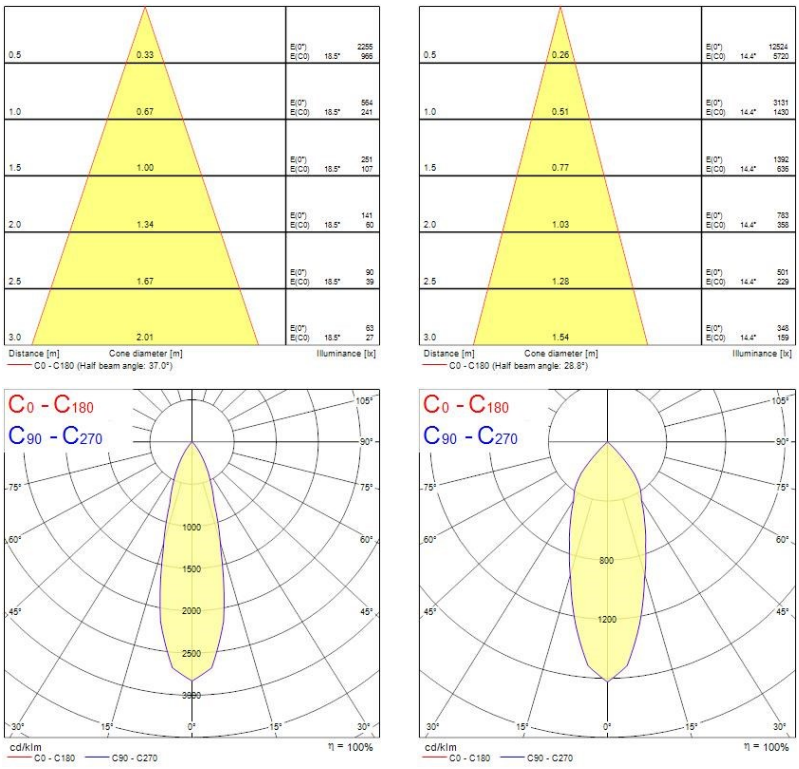


## TECHNICAL DRAWINGS








© Feilo Sylvania | Date Printed: 22 Nov 2018

# Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP ST 3K PHDMEM SIL CBEZ*

**2058910**

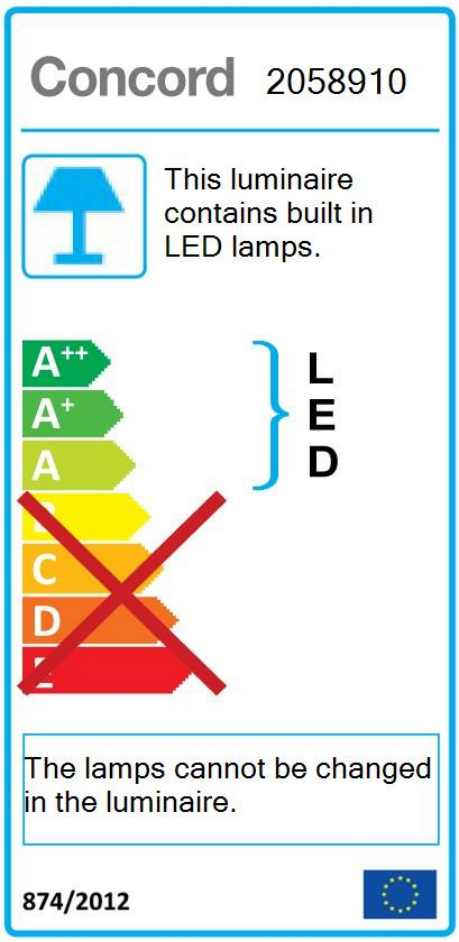

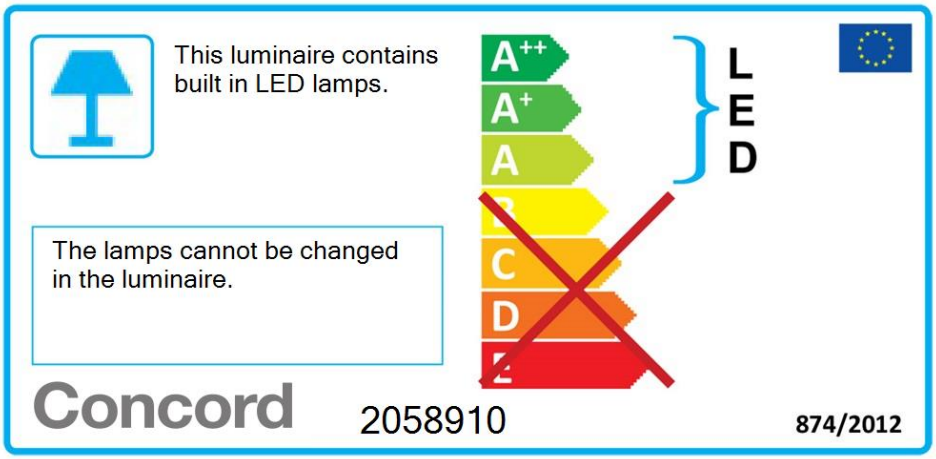


© Feilo Sylvania | Date Printed: 22 Nov 2018