


Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD EMG 160
2060556



Product features

- The ASCENT 100 II ARCH 1900 4K STD EMG 160 is a high efficient non dimmable downlight luminaire with 3 hour emergency, luminous flux: 1921lm, luminaire efficacy: 101lm/W, Colour rendering index Ra >80, Colour temperature: 4000K Neutral White, Average life rated at 50,000Hrs, Class II, Protection rating IP44/IK02, Cut out dimensions: 178mm

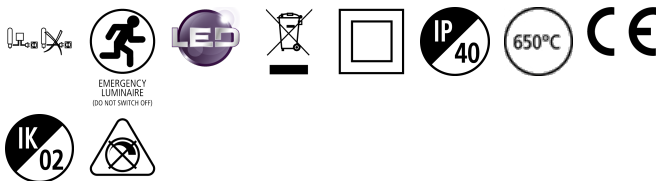

PRODUCT OVERVIEW

IPC Code	2060556
Product name	ASCENT 100 II ARCH 1900 4K STD EMG 160
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality, Retail, Office,
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	1921
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Glare control	23.4
Photobiological Risk Group	Group 0
Total power consumption (W)	19
Electrical protection	Class II
Control gear type	Electronic Emergency
Control gear mounting	Remote
Dimmable	No
Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Product EAN number	5025768605569
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2060556
----------	---------

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD EMG 160

2060556

Product name	ASCENT 100 II ARCH 1900 4K STD EMG 160
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
General application	Hospitality,Retail,Office,
Operating temperature range (°C)	0-25
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	1921
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Beam angle (Rated) (°)	85
Distribution type	Direct
Glare control	23.4
Photobiological Risk Group	Group 0
Emergency duration (h)	3

Electrical data

Total power consumption (W)	19
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear required	Yes
Control gear type	Electronic Emergency
Control gear mounting	Remote
Dimmable	No
Drive current (mA)	700
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 16A C Breaker	80

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	34000
Lumen maintenance - L90 B10	48000

Physical data

Ascent 100 II Arch 160


ASCENT 100 II ARCH 1900 4K STD EMG 160
2060556

Housing colour	White - RAL9016
IP rating	IP40
IK rating	IK02
Diffuser finish	Light Opal
Diffuser material	Arcylic
Reflector finish	Arch
Nominal Product Width (mm)	150
Nominal Product Height (mm)	94
Nominal Product Diameter (mm)	160
Weight (kg)	1.92

Packaging


Single packaging type	Carton
Product EAN number	5025768605569
Packaging single length / height (cm)	30.0
Packaging single width (cm)	30.0
Packaging single depth (cm)	12.5
DUN14 (outer)	05025768605569
Units per outer package	1
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	12.5

PHOTOMETRY

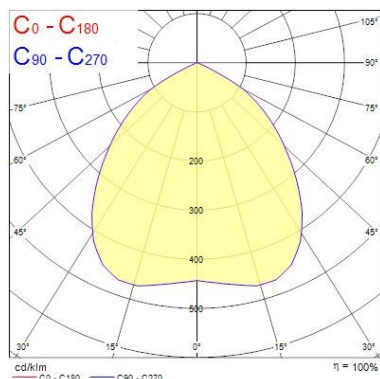

0.5	1.10	E(0°) E(C0)	335 55
1.0	2.19	E(0°) E(C0)	54 14
1.5	3.29	E(0°) E(C0)	37 6
2.0	4.38	E(0°) E(C0)	21 3
2.5	5.48	E(0°) E(C0)	13 2
3.0	6.57	E(0°) E(C0)	9 1

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 95.2°) Illuminance [lx]

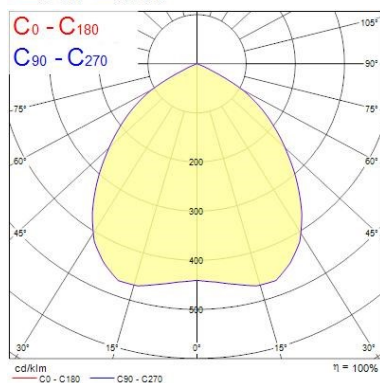



0.5	1.08	E(0°) E(C0)	3405 565
1.0	2.17	E(0°) E(C0)	581 147
1.5	3.25	E(0°) E(C0)	378 63
2.0	4.33	E(0°) E(C0)	213 35
2.5	5.42	E(0°) E(C0)	135 23
3.0	6.50	E(0°) E(C0)	95 15

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 94.6°) Illuminance [lx]

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD EMG 160
2060556

TECHNICAL DRAWINGS

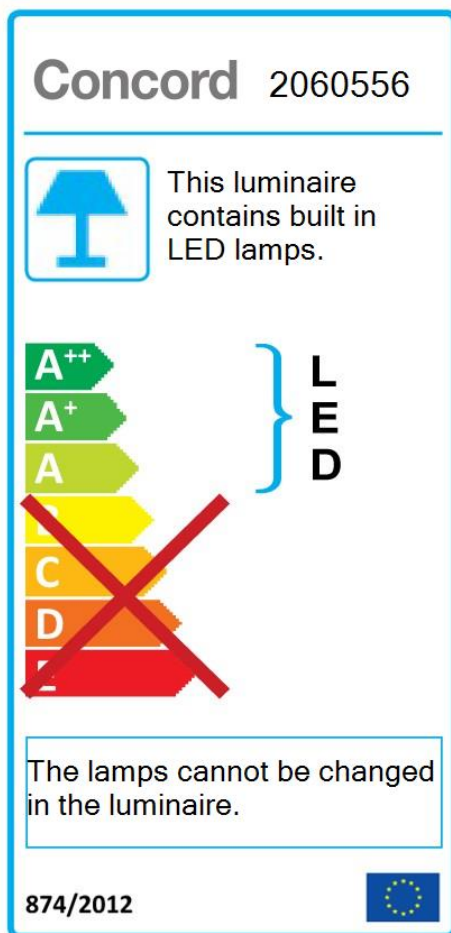

Ascent 100 II Arch 160

ASCENT 100 II ARCH 1900 4K STD EMG 160

2060556

