

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K PHDMEM SIL CBEZ
2058922



Product features

- MYRIAD IP65 FLOOD 3000K Phase dimmable with silver reflector, chrome bezel and 3 hour emergency



PRODUCT OVERVIEW

IPC Code	2058922
Product name	MYRD IP FL 3K PHDMEM SIL CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC001744
Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Beam Angle (°)	46
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	359
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic
Minimum dimming level (%)	10
Average life (Nominal) (h)	50000
Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Product EAN number	5025768589227
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	2058922
----------	---------

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K PHDMEM SIL CBEZ
2058922

Product name	MYRD IP FL 3K PHDMEM SIL CBEZ
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed
Environment	Integral
General application	Hospitality,Office,Retail
Operating temperature rated (°C)	25
Certifications	EUNEW001
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	988
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	85
Adjustable chromaticity	N
Beam Angle (°)	46
Distribution type	Direct
Photobiological Risk Group	-
Luminous flux (emergency) (lm)	359
Emergency duration (h)	3

Electrical data

Total power consumption (W)	12
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear type	Electronic
Transformer required	Yes
Minimum dimming level (%)	10
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

Physical data

Housing colour	Silver Trim
IP rating	IP65
IK rating	IK02
Diffuser finish	Silver Trim Chrome Bezel
Reflector finish	Aluminium
Nominal Product Height (mm)	72
Nominal Product Diameter (mm)	90
Weight (kg)	1.44
Recessed Depth (mm)	72



Packaging

Single packaging type	Carton
-----------------------	--------

Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K PHDMEM SIL CBEZ 2058922

Product EAN number	5025768589227
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768589227
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

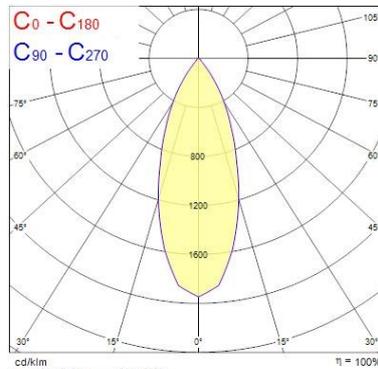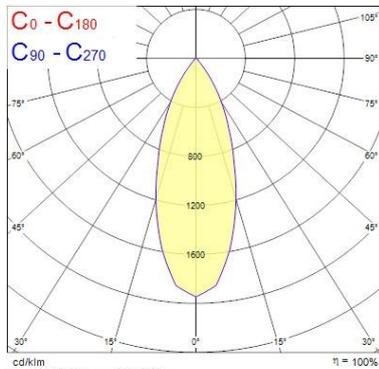


Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(15°) E(C90)
0.5	0.34	7993 3289	15.9°
1.0	0.68	1923 811	15.9°
1.5	1.03	856 362	15.9°
2.0	1.37	481 204	15.9°
2.5	1.71	308 131	15.9°
3.0	2.05	214 91	15.9°

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 37.8°)

Distance [m]	Cone diameter [m]	E(0°) E(C0)	E(15°) E(C90)
0.5	0.34	2796 1188	15.9°
1.0	0.68	899 267	15.9°
1.5	1.03	311 132	15.9°
2.0	1.37	175 74	15.9°
2.5	1.71	112 48	15.9°
3.0	2.05	78 33	15.9°

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 37.8°)

TECHNICAL DRAWINGS



Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K PHDMEM SIL CBEZ 2058922

Concord 2058922

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2058922  874/2012