

Sylveo LED 30000lm - Extra Extra Large

SYLVEO LED 30000LM WIDE 4K DALI
0049149



Product features

- Exterior LED floodlight, comes complete with a 1000mm cable and adjustable bracket, aluminium housing, clear glass diffuser, 32426lm, 301W, 108lm/W, 4000K, 2380mA, CRI70, 52° beam angle, DALI dimmable, IP66, IK08, Class I, 50000hrs, (LxWxD) 98x648x392mm



PRODUCT OVERVIEW

IPC Code	0049149
Product name	SYLVEO LED 30000LM WIDE 4K DALI
Technology	LED
Housing	Aluminium
Mount	Surface Mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Certifications	EUNEW005
ETIM Class	EC001744
E-number FI	4579407
Fixture luminous flux (lm)	32426
Luminaire efficacy (lm/W)	108
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52
Glare control	19
Photobiological Risk Group	RG1
Total power consumption (W)	301
Electrical protection	Class I
Control gear type	DALI
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Product EAN number	5410288491493
Lamps	No

Sylveo LED 30000lm - Extra Extra Large

SYLVEO LED 30000LM WIDE 4K DALI
0049149

DATA TABLE

General data

IPC Code	0049149
Product name	SYLVEO LED 30000LM WIDE 4K DALI
Technology	LED
Housing	Aluminium
Mount	Surface Mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-40 to +45
Operating temperature rated (°C)	25
Certifications	EUNEW005
ETIM Class	EC001744
E-number FI	4579407

Optical data

Fixture luminous flux (lm)	32426
Luminaire efficacy (lm/W)	108
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Colour Variation Initial (SDCM)	6
Beam Angle (°)	52
Distribution type	Direct
Glare control	19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	301
Current (A)	1.3
Mains voltage (V)	100-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	DALI
Dimmable	Yes
Minimum dimming level (%)	1
Drive current (mA)	2380
Inrush Current (A)	120
Inrush Duration (µs)	1020
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	2
Max. Luminaires per 13A C Breaker	2

Sylveo LED 30000lm - Extra Extra Large SYLVEO LED 30000LM WIDE 4K DALI 0049149

Max. Luminaires per 16A C Breaker	3
Max. Luminaires per 20A C Breaker	4

Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L70 B20	42000
Lumen maintenance - L70 B10	39000
Lumen maintenance - L80 B50	49000
Lumen maintenance - L80 B20	33600
Lumen maintenance - L80 B10	31200
Lumen maintenance - L90 B50	22000
Lumen maintenance - L90 B20	18480
Lumen maintenance - L90 B10	17160
Average life (Nominal) (h)	50000

Physical data

Vertical Tilt (°)	200
Horizontal rotation (°)	180
Housing colour	RAL9006
IP rating	IP66
IK rating	IK08
Diffuser finish	Clear
Diffuser material	Glass
Nominal Product Length (mm)	98
Nominal Product Width (mm)	648
Nominal Product Height (mm)	392
Weight (kg)	15.82
Wind Area (m ²)	0.236

Packaging

Single packaging type	Carton
Product EAN number	5410288491493
Packaging single length / height (cm)	52.9
Packaging single width (cm)	69.2
Packaging single depth (cm)	17.1
DUN14 (outer)	05410288491493
Units per outer package	1
Packaging outer length / height (cm)	52.9
Packaging outer width (cm)	69.2
Packaging outer depth (cm)	17.1


PHOTOMETRY

Sylveo LED 30000lm - Extra Extra Large SYLVEO LED 30000LM WIDE 4K DALI 0049149


0.5	0.51	E(0°) E(C0)	15154 54623
1.0	1.02	E(0°) E(C0)	30296 10927
1.5	1.53	E(0°) E(C0)	45439 6070
2.0	2.04	E(0°) E(C0)	60582 3414
2.5	2.55	E(0°) E(C0)	75725 2165
3.0	3.06	E(0°) E(C0)	90868 1617

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 54.0°)

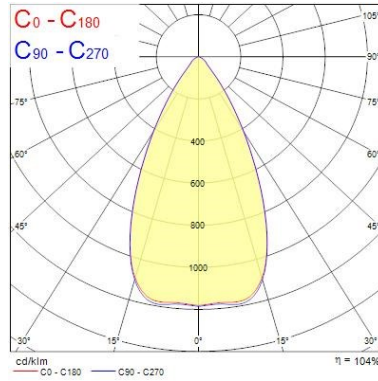

TECHNICAL DRAWINGS



SYLVANIA 0049149

This luminaire contains built in LED lamps.

} LED

The lamps cannot be changed in the luminaire.

874/2012

Sylveo LED 30000lm - Extra Extra Large SYLVEO LED 30000LM WIDE 4K DALI 0049149

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0049149 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED