

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K PHDMEM WHT CBEZ
2058946



Product features

- MYRIAD IP65 FLOOD 3000K Phase dimmable with white reflector, chrome bezel and 3 hour emergency



PRODUCT OVERVIEW

| | |
|--------------------------------|--|
| IPC Code | 2058946 |
| Product name | MYRD IP FL 3K PHDMEM WHT CBEZ |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |
| Fixture luminous flux (lm) | 988 |
| Luminaire efficacy (lm/W) | 82 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Beam Angle (°) | 46 |
| Photobiological Risk Group | - |
| Luminous flux (emergency) (lm) | 359 |
| Total power consumption (W) | 12 |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Minimum dimming level (%) | 10 |
| Average life (Nominal) (h) | 50000 |
| Housing colour | White Trim |
| IP rating | IP65 |
| IK rating | IK02 |
| Product EAN number | 5025768589463 |
| Lamps | Yes |
| Included lamp | INTEGRATED LED |

DATA TABLE

General data

| | |
|----------|---------|
| IPC Code | 2058946 |
|----------|---------|

Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP FL 3K PHDMEM WHT CBEZ
2058946

| | |
|----------------------------------|--|
| Product name | MYRD IP FL 3K PHDMEM WHT CBEZ |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed |
| Environment | Integral |
| General application | Hospitality,Office,Retail,Residential & Consumer |
| Operating temperature rated (°C) | 25 |
| Certifications | EUNEW001 |
| ETIM Class | EC001744 |

Optical data

| | |
|--------------------------------|--------|
| Fixture luminous flux (lm) | 988 |
| Luminaire efficacy (lm/W) | 82 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 85 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 46 |
| Distribution type | Direct |
| Photobiological Risk Group | - |
| Luminous flux (emergency) (lm) | 359 |
| Emergency duration (h) | 3 |

Electrical data

| | |
|-----------------------------|------------|
| Total power consumption (W) | 12 |
| Mains voltage (V) | 230-240V~ |
| Electrical protection | Class II |
| Control gear type | Electronic |
| Transformer required | Yes |
| Minimum dimming level (%) | 10 |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
| Average life (Nominal) (h) | 50000 |

Physical data

| | |
|-------------------------------|-------------------------|
| Housing colour | White Trim |
| IP rating | IP65 |
| IK rating | IK02 |
| Diffuser finish | White Trim Chrome Bezel |
| Reflector finish | Aluminium |
| Nominal Product Height (mm) | 72 |
| Nominal Product Diameter (mm) | 90 |
| Weight (kg) | 1.44 |
| Recessed Depth (mm) | 72 |


Packaging

| | |
|-----------------------|--------|
| Single packaging type | Carton |
|-----------------------|--------|


Myriad V LED - IP65 Glass Chrome Bezel MYRD IP FL 3K PHDMEM WHT CBEZ 2058946

| | |
|---------------------------------------|----------------|
| Product EAN number | 5025768589463 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| DUN14 (outer) | 05025768589463 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |

PHOTOMETRY

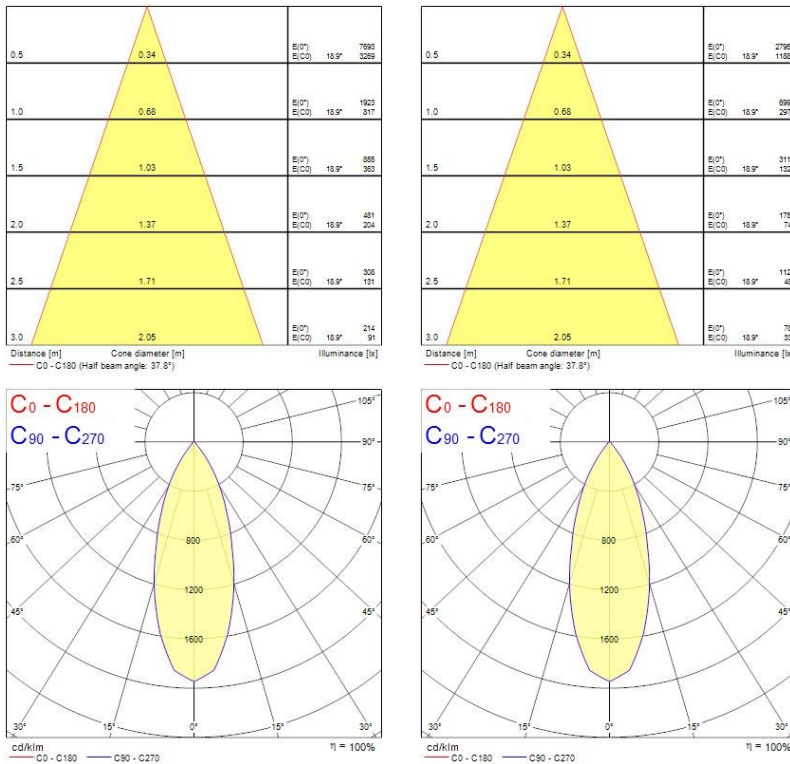


TECHNICAL DRAWINGS




Dimensions (mm)


Myriad V LED - IP65 Glass Chrome Bezel
MYRD IP FL 3K PHDMEM WHT CBEZ
2058946


Concord 2058946


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

Concord 2058946  874/2012