

## Myriad V LED - IP65 Glass Chrome Bezel

MYRD IP ST 2.7K PHDMEM BLK CBEZ  
2058954



### Product features

- MYRIAD IP65 SPOT 2700K Phase dimmable with black reflector, chrome bezel and 3 hour emergency



## PRODUCT OVERVIEW

|                                |                                                     |
|--------------------------------|-----------------------------------------------------|
| IPC Code                       | 2058954                                             |
| Product name                   | MYRD IP ST 2.7K PHDMEM BLK CBEZ                     |
| Technology                     | LED                                                 |
| Housing                        | Aluminium                                           |
| Mount                          | Ceiling recessed                                    |
| Environment                    | Integral                                            |
| General application            | Hospitality, Office, Retail, Residential & Consumer |
| Certifications                 | EUNEW001                                            |
| ETIM Class                     | EC001744                                            |
| Fixture luminous flux (lm)     | 1241                                                |
| Luminaire efficacy (lm/W)      | 103                                                 |
| LOR (%)                        | 100                                                 |
| Colour temperature (K)         | 2700                                                |
| CRI (Ra)                       | 85                                                  |
| Beam Angle (°)                 | 28                                                  |
| Photobiological Risk Group     | -                                                   |
| Luminous flux (emergency) (lm) | 275                                                 |
| Total power consumption (W)    | 12                                                  |
| Electrical protection          | Class II                                            |
| Control gear type              | Electronic                                          |
| Minimum dimming level (%)      | 10                                                  |
| Average life (Nominal) (h)     | 50000                                               |
| Housing colour                 | Black Trim                                          |
| IP rating                      | IP65                                                |
| IK rating                      | IK02                                                |
| Product EAN number             | 5025768589548                                       |
| Lamps                          | Yes                                                 |
| Included lamp                  | INTEGRATED LED                                      |

## DATA TABLE

### General data

|          |         |
|----------|---------|
| IPC Code | 2058954 |
|----------|---------|

## Myriad V LED - IP65 Glass Chrome Bezel

*MYRD IP ST 2.7K PHDMEM BLK CBEZ*

2058954

|                                  |                                                  |
|----------------------------------|--------------------------------------------------|
| Product name                     | MYRD IP ST 2.7K PHDMEM BLK CBEZ                  |
| Technology                       | LED                                              |
| Housing                          | Aluminium                                        |
| Mount                            | Ceiling recessed                                 |
| Environment                      | Integral                                         |
| General application              | Hospitality,Office,Retail,Residential & Consumer |
| Operating temperature rated (°C) | 25                                               |
| Certifications                   | EUNEW001                                         |
| ETIM Class                       | EC001744                                         |

### Optical data

|                                |        |
|--------------------------------|--------|
| Fixture luminous flux (lm)     | 1241   |
| Luminaire efficacy (lm/W)      | 103    |
| LOR (%)                        | 100    |
| Colour temperature (K)         | 2700   |
| CRI (Ra)                       | 85     |
| Adjustable chromaticity        | N      |
| Beam Angle (°)                 | 28     |
| Distribution type              | Direct |
| Photobiological Risk Group     | -      |
| Luminous flux (emergency) (lm) | 275    |
| Emergency duration (h)         | 3      |

### Electrical data

|                             |            |
|-----------------------------|------------|
| Total power consumption (W) | 12         |
| Mains voltage (V)           | 230-240V~  |
| Electrical protection       | Class II   |
| Control gear type           | Electronic |
| Transformer required        | Yes        |
| Minimum dimming level (%)   | 10         |
| Nominal Frequency (Hz)      | 50/60Hz    |

### Lifetime data

|                             |       |
|-----------------------------|-------|
| Lumen maintenance - L70 B50 | 50000 |
| Average life (Nominal) (h)  | 50000 |

### Physical data

|                               |                         |
|-------------------------------|-------------------------|
| Housing colour                | Black Trim              |
| IP rating                     | IP65                    |
| IK rating                     | IK02                    |
| Diffuser finish               | Black Trim Chrome Bezel |
| Reflector finish              | Aluminium               |
| Nominal Product Height (mm)   | 72                      |
| Nominal Product Diameter (mm) | 90                      |
| Weight (kg)                   | 1.44                    |
| Recessed Depth (mm)           | 72                      |

### Packaging





|                       |        |
|-----------------------|--------|
| Single packaging type | Carton |
|-----------------------|--------|

## Myriad V LED - IP65 Glass Chrome Bezel


MYRD IP ST 2.7K PHDMEM BLK CBEZ  
2058954

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5025768589548  |
| Packaging single length / height (cm) | 17.5           |
| Packaging single width (cm)           | 15.0           |
| Packaging single depth (cm)           | 17.5           |
| DUN14 (outer)                         | 05025768589548 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 17.5           |
| Packaging outer width (cm)            | 15.0           |
| Packaging outer depth (cm)            | 17.5           |

### PHOTOMETRY

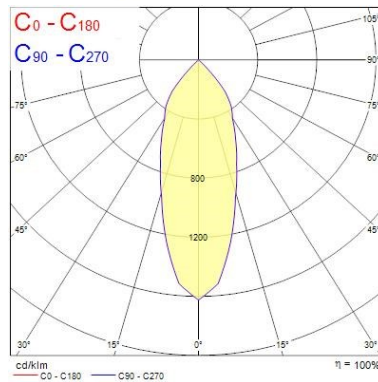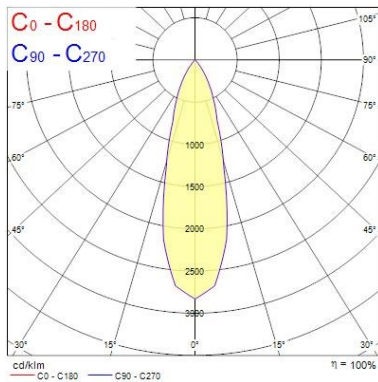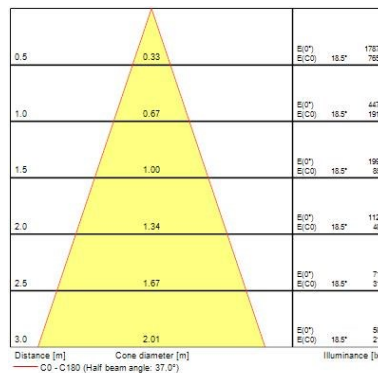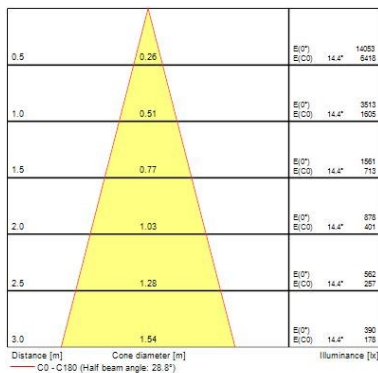

### TECHNICAL DRAWINGS



## Myriad V LED - IP65 Glass Chrome Bezel MYRD IP ST 2.7K PHDMEM BLK CBEZ 2058954

