

Sylproof Tubular LED - DALI

Sylproof Tubular LED 1X1500 DALI WW

0047606



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED



PRODUCT OVERVIEW

IPC Code	0047606
Product name	Sylproof Tubular LED 1X1500 DALI WW
Technology	LED
Housing	Acrylic/PMMA Tube
Mount	Surface
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	3223
Luminous flux (lm)	3223
Luminaire efficacy (lm/W)	101.99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	0
Total power consumption (W)	31.6
Electrical protection	Class I
Control gear type	Electronic dimmable
Minimum dimming level (%)	90
Average life (Nominal) (h)	50000
Housing colour	Matt Diffuser
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476063
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0047606
Product name	Sylproof Tubular LED 1X1500 DALI WW

Sylproof Tubular LED - DALI

Sylproof Tubular LED 1X1500 DALI WW

0047606

Technology	LED
Housing	Acrylic/PMMA Tube
Mount	Surface
Environment	Interior
General application	Logistics & Industry
Operating temperature range (°C)	-20 to +25
ETIM Class	EC000109

Optical data

Fixture luminous flux (lm)	3223
Luminous flux (lm)	3223
Luminaire efficacy (lm/W)	101.99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Photobiological Risk Group	0

Electrical data

Total power consumption (W)	31.6
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic dimmable
Minimum dimming level (%)	90
Drive current (mA)	400
Glow Wire Test (°C)	650
Lamp Energy Label (class)	A+
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	24

Lifetime data

Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B10	49000
Lumen maintenance - L90 B50	35000
Average life (Nominal) (h)	50000

Physical data

Vertical Tilt (°)	360
Horizontal rotation (°)	360
Housing colour	Matt Diffuser
IP rating	IP66
IK rating	IK06
Diffuser finish	Matt/Opaque
Diffuser material	Acrylic/PMMA
Nominal Product Length (mm)	1600

Sylproof Tubular LED - DALI

Sylproof Tubular LED 1X1500 DALI WW
0047606

Nominal Product Width (mm)	112
Nominal Product Height (mm)	112
Weight (kg)	3.1


Packaging

Single packaging type	Carton
Product EAN number	5410288476063
Packaging single length / height (cm)	160.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0
DUN14 (outer)	05410288476063
Units per outer package	1
Packaging outer length / height (cm)	160.0
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	13.0


PHOTOMETRY

Distance [m]	Cone diameter [m]	E [lm]	E (C90)	E (C0)
0.5	1.17 1.30	3974 541	49.8° 61.0°	227
1.0	2.35 3.61	994 135	49.8° 61.0°	57
1.5	3.52 5.41	442 60	49.8° 61.0°	25
2.0	4.70 7.22	248 34	49.8° 61.0°	14
2.5	5.87 9.02	159 22	49.8° 61.0°	9
3.0	7.05 10.82	110 15	49.8° 61.0°	6

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 122.0°)
C90 - C270 (Half beam angle: 99.2°)
Illuminance [lx]

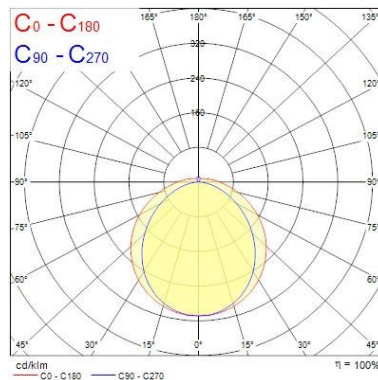

TECHNICAL DRAWINGS



Sylproof Tubular LED - DALI

Sylproof Tubular LED 1X1500 DALI WW
0047606

